


## Ty-Rap® Wire Management Clips, Clamps, Spiral Wrap and More

Several mounting styles available.

### Mechanical-Locking Routing Clamps

- Clamp acts as a retainer during wire routing, and as a permanent clamp when desired

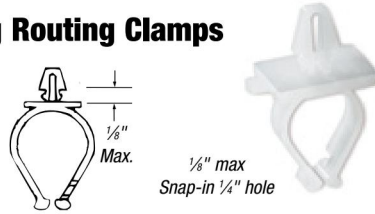


STD. CAT. NO.	MOUNTING HOLE SIZE		BUNDLE DIA. IN./MM	MAX. WIRE BUNDLE DIA.		LENGTH IN./MM	STD. PKG. QTY.
	IN./MM	IN./MM		IN./MM	IN./MM		
TC88	.250/6.35	.500/12.7	.250/6.35	.891/22.63	100	1,000	
TC95	.250/6.35	1.000/25.4	.500/12.7	1.590/40.39	100	1,000	

• Natural nylon color.  
For use in temperatures ranging from -40° F to 185° F (-40° C to 85° C).

### Ty-Rap® Saddle Mounting Plate

- For use with round bundles

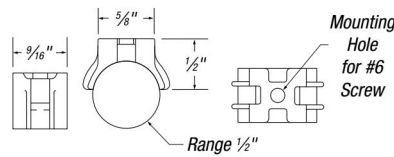

STD. CAT. NO.	PKG. QTY.	MAX TIE WIDTH IN./MM	SIZE IN./MM	BUNDLE HOLE SIZE IN./MM	MOUNTING STD. PKG. QTY.
TC92	100	.190/4.83	1/2-1 1/4 / 12.7-31.75	#6 Screw	100

• Natural nylon color.  
For use in temperatures ranging from -40° F to 185° F (-40° C to 85° C).

Wires are held 1/2" above work surface for easy tying.

### Wire-Bundle Retainers

- Consist of a spring-loaded clip and an elastic bundle support
- Wires are inserted by snapping them through spring-loaded clips



STD. CAT. NO.	PKG. FASTENER	MAX. WIRE BUNDLE DIA.	WIDTH IN./MM	LENGTH IN./MM	HEIGHT IN./MM	STD. PKG. QTY.
TC86	#6 screws	.750/19.05	1.750/44.45	1.813/46.05	25	1,000
TC87	#6 screws	1.250/31.75	2.469/62.71	2.281/57.94	10	1,000

Hardened, nickel-plated, steel construction.

### Harness-Board Nails

- For wire harness board manufacturing



STD. CAT. NO.	PKG. QTY.	DIMENSIONS			STD. PKG. QTY.
		A	B	C	
HBP112	100	1.500/38.10	.625/15.88	.082/2.08	100
HBP2	100	2.000/50.80	.625/15.88	.092/2.34	100
HBP212	100	2.500/63.50	.625/15.88	.105/2.67	100
HBP3	100	3.000/76.20	.625/15.88	.120/3.05	100

Keep wire bundles apart.

### Wire-Bundle Spacer



STD. CAT. NO.	PKG. QTY.	MAXIMUM TIE WIDTH ACCOM.	WIDTH IN./MM	LENGTH IN./MM	STD. PKG. QTY.
TC5339	100	.190/4.83	.266/6.76	.500/12.70	100

• Natural nylon color.  
For use in temperatures ranging from -40° F to 185° F (-40° C to 85° C).