

# Type TCM Time Lag Surface Mount Fuse Square Ceramic



www.optifuse.com (619) 593-5050

### Agency Standards and Listings:

UL Recognized 200mA ~ 7A  
 CSA Listed 200mA ~ 7A  
 PSE 1A ~ 7A



### Interrupt Ratings:

50 amperes at 125V AC/DC  
 300 amperes at 32V DC

### Environmental Specifications:

#### Operating Temperature:

-55°C to +125°C

#### Vibration:

MIL-STD-202G, Method 201 (10-55 Hz,  
 0.06 inch total excursion)

#### Salt Spray:

MIL-STD-202G, Method 101,  
 Test Condition B (48 Hrs)

**Insulation Resistance:** MIL-STD-202G,  
 Method 302, Test Condition A

#### Resistance to Solder Heat:

MIL-STD-202G, Method 210,  
 Test Condition B (10 Sec, at 260°C)

#### Thermal Shock:

MIL-STD-202G, Method 107,  
 Test Condition B (-65°C to + 125°C)

### Physical Specifications:

#### Materials:

Body: Ceramic  
 Terminations: Silver Plated Brass Caps

#### Packaging:


1,000 Fuses on 7 inch dia. Reel.  
 12mm wide tape per EIA Standard 481.

OptiFuse Part Number	Ampere Rating	Voltage
TCM-200mA	200mA	125 V
TCM-250mA	250mA	
TCM-300mA	300mA	
TCM-350mA	350mA	
TCM-375mA	375mA	
TCM-400mA	400mA	
TCM-450mA	450mA	
TCM-500mA	500mA	
TCM-700mA	700mA	
TCM-750mA	750mA	
TCM-1A	1A	
TCM-1.25A	1.25A	
TCM-1.5A	1.5A	
TCM-2A	2A	
TCM-2.5A	2.5A	
TCM-3A	3A	
TCM-3.5A	3.5A	
TCM-4A	4A	
TCM-5A	5A	
TCM-6A	6A	
TCM-7A	7A	

### Electrical Characteristics:

Rated Current	100%		200%		300%		800%	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
200mA~7A	4 h	1s	60s	200ms	3s	20ms	100ms	

### Mechanical Dimensions: Inches [mm]

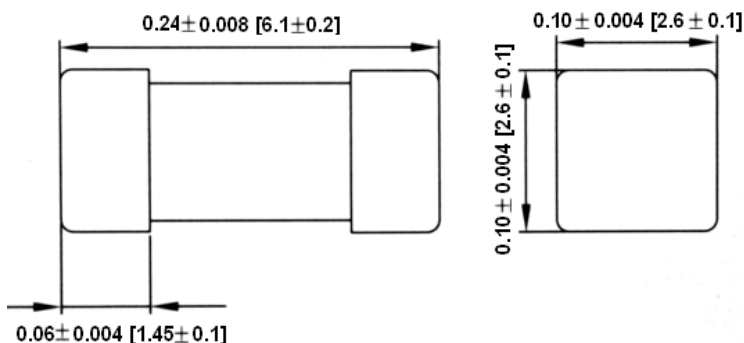


**Type TCM**  
**Time Lag Surface Mount Fuse**  
**Square Ceramic**




www.optifuse.com (619) 593-5050

**Part Number TCM**

TIME CURRENT CURVES

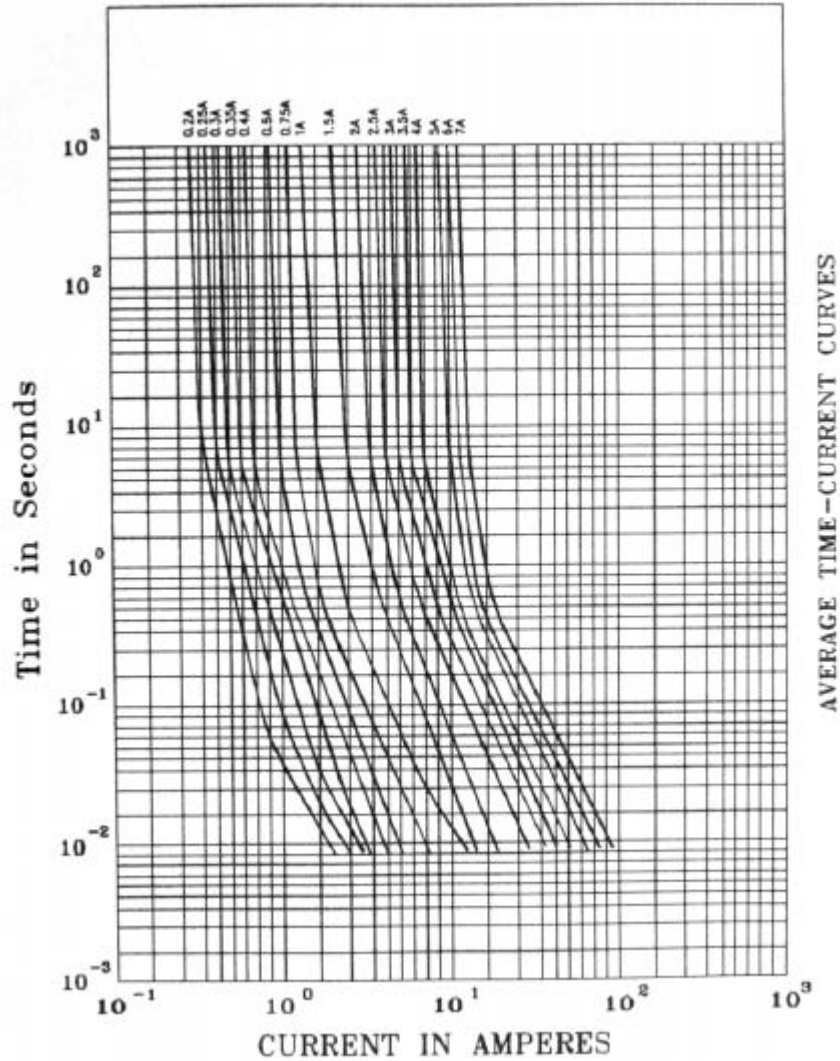

<p><b>Warning:</b></p> 	<ul style="list-style-type: none"> <li>-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.</li> <li>-Ceramic Fuses are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.</li> <li>-Avoid contact of Ceramic Fuse with chemical solvent. Prolonged contact will damage the device performance.</li> </ul>
--	--