



# SERIES TL 1014 SWITCHES

## TACT SWITCHES SMT - SIDE MOUNT ACTUATED



### SPECIFICATIONS

Contact Rating:	12VDC, 50mA
Life Expectancy:	100,000 cycles minimum
Contact Resistance:	100mΩ max.
Insulation Resistance:	100MΩ min.
Dielectric Strength:	250 VAC
Actuator Force:	180 ± 50 gf min.
Operating Temperature:	-20°C to +70°C
Travel:	0.30 Typ

### MATERIALS

Housing:	Nylon 46
Actuator:	Nylon 46
Cover:	Stainless Steel
Contact Dome:	Stainless Steel
Terminals:	Brass
Tape & Reel:	3000 pieces per reel

### FEATURES & BENEFITS


- ▶ Subminiature design
- ▶ Right Angle SMT
- ▶ Tape & Reel

### APPLICATIONS/MARKETS

- ▶ Telecommunications
- ▶ Consumer Electronics
- ▶ Audio/visual
- ▶ Medical
- ▶ Testing/instrumentation
- ▶ Computer/servers/peripherals



### HOW TO ORDER



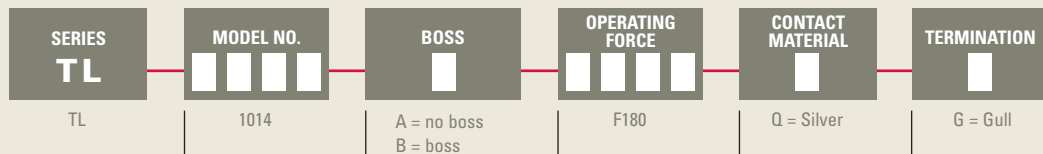


### Example Ordering Number

TL-1014-A-F180-Q-G

Specifications subject to change without notice.

## TL 1014

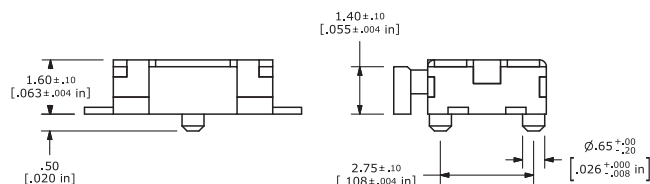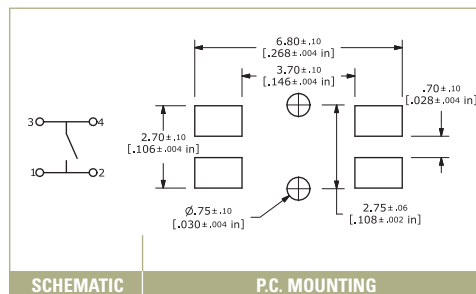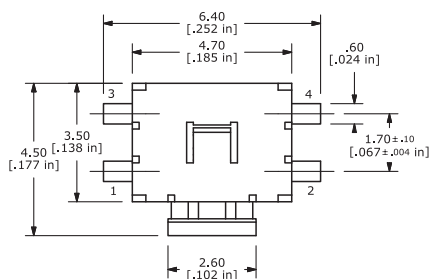

TACT SWITCHES

NAVIGATION SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

ROCKER SWITCHES

SLIDE SWITCHES

SNAP-ACTION SWITCHES

DIP SWITCHES

KEYLOCK SWITCHES

ROTARY SWITCHES

DETECTOR SWITCHES

CAP OPTIONS