



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	18-03-2021	GUTTADAURO

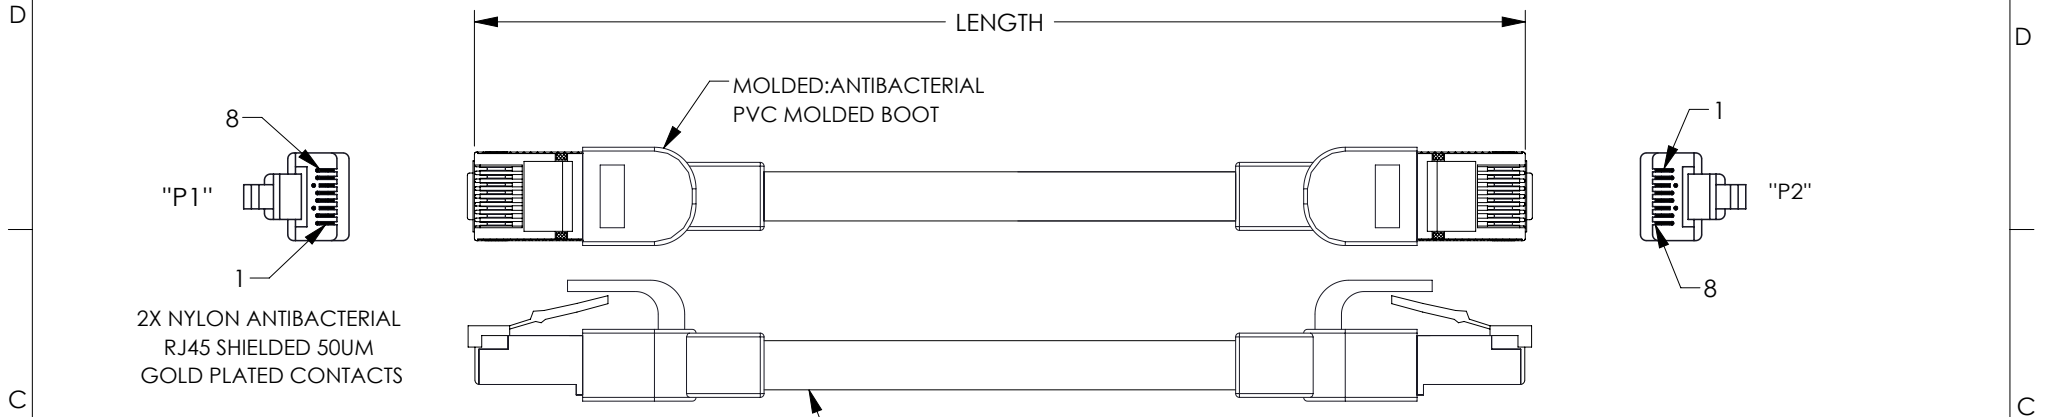

WIRING MAP

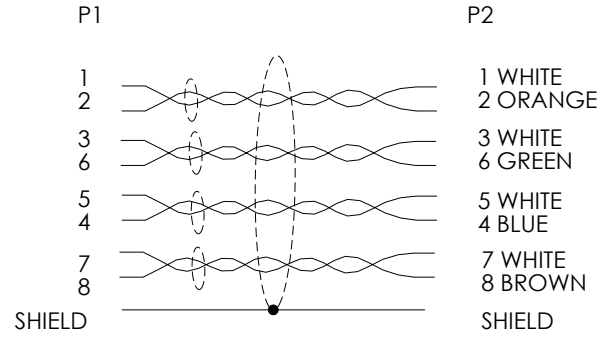

Cat 6a. FOUR TWISTED PAIR, STRANDED BARE COPPER
 S/FTP ALUM/POLY SHIELDED PAIRS AND OVERALL BRAID.
 CONDUCTOR TYPE - 26AWG(7/0.16±0.008MM), STRANDED BC
 INSULATION - FOPE
 CABLE JACKET: ANTIBACTERIAL LSZH
 TEMPERATURE RATING -20°C TO +75°C.
 VOLTAGE RATING - 30V.
 WIRING SCHEME -TIA568B.

PART NUMBER	LENGTH FEET [METERS]
TRM695ASFZ-WHT-05F	0.5 [0.15]
TRM695ASFZ-WHT-1F	1.0 [0.30]
TRM695ASFZ-WHT-2F	2.0 [0.60]
TRM695ASFZ-WHT-3F	3.0 [0.91]
TRM695ASFZ-WHT-5F	5.0 [1.52]
TRM695ASFZ-WHT-7F	7.0 [2.13]
TRM695ASFZ-WHT-10F	10.0 [3.04]
TRM695ASFZ-WHT-15F	15.0 [4.57]
TRM695ASFZ-WHT-20F	20.0 [6.09]
TRM695ASFZ-WHT-25F	25.0 [7.62]
TRM695ASFZ-WHT-50F	50.0 [15.24]
TRM695ASFZ-WHT-60F	60.0 [18.28]
TRM695ASFZ-WHT-70F	70.0 [21.33]
TRM695ASFZ-WHT-80F	80.0 [24.38]
TRM695ASFZ-WHT-100F	100.0 [30.48]

NOTES:

ANTIBACTERIAL TEST METHOD:
 ISO 22196:2011 MEASUREMENT OF ANTIBACTERIAL ACTIVITY
 ON PLASTICS AND OTHER NON-POROUS SURFACES.

TEST ORGANISM:
 ESCHERICHIA COLI ATCC 8738
 STAPHYLOCOCCUS AUREUS ATCC 6538P

ANTIBACTERIAL ACTIVITY RATE:
 ESCHERICHIA COLI > 99.9%
 STAPHYLOCOCCUS AUREUS > 99.9%

MISCELLANEOUS:
 CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN
 ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	 an INFINITI® brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936		
	OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	DRAWN BY MVEERAPPAN 18-03-2021		CHECKED BY 18-03-2021	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVED BY GUTTADAURO 18-03-2021	CATEGORY TELECOM/MODULAR	PRODUCT DESCRIPTION Cat6A Antibacterial S/FTP RJ45 26STR CMLSZH WHT		
	THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	CAGE CODE 43321
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: TRM695ASFZ-WHT.SLDDRW	SHEET 1 OF 1	