


Snap Rivet - TRSR

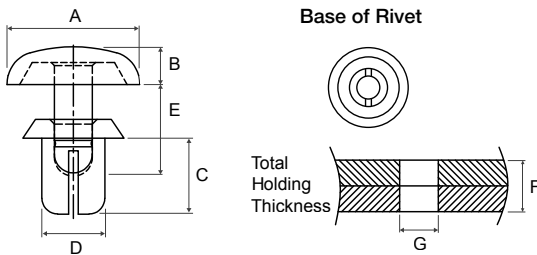

Type: Snap Rivet TRSR
 Material: Nylon 6 UL94V2 / TMS 052
 Nylon 46 (Heat Stabilised)
 Colour: Black/White
 Unit: mm
 Standard Pack: 1,000 per bag

Please add B for black, W for white colour.
 Flame retardant - please add V0 at the end of the part number.

Heat resistant - add HR to part number, heat resistant to 150°C


Part Number	Insertion Force		≤ 2.5 kgf		Extraction Force			≤ 3.0 kgf
	Colour	G	F	A	B	C	D	E
TRSR2024	B W	2.1	0.6 ~ 1.2	4.2	1.2	2.4	2.0	2.8
TRSR2032	B W		1.3 ~ 2.0			3.2		3.8
TRSR2040	B W		2.1 ~ 2.8			4.0		5.5
TRSR2048	B W		2.9 ~ 3.6			4.8		7.2
TRSR2056	B W		3.7 ~ 4.4			5.6		
TRSR2064	B W		4.5 ~ 5.2			6.4		

Part Number	Insertion Force		≤ 3.0 kgf		Extraction Force			≤ 3.0 kgf
	Colour	G	F	A	B	C	D	E
TRSR2632	B W	2.7	1.0 ~ 2.0	5.0	1.4	3.2	2.6	4.6
TRSR2642	B W		2.1 ~ 3.0			4.2		6.2
TRSR2648	B W		2.7 ~ 3.6			4.8		7.8
TRSR2655	B W		3.4 ~ 4.3			5.5		
TRSR2664	B W		4.3 ~ 5.2			6.4		
TRSR2672	B W		5.1 ~ 6.0			7.2		

Part Number	Insertion Force		≤ 2.5 kgf		Extraction Force			≤ 3.0 kgf
	Colour	G	F	A	B	C	D	E
TRSR3035	B W	3.1	1.0 ~ 2.0	6.4	1.6	3.5	3.0	5.1
TRSR3045	B W		2.0 ~ 3.0			4.5		6.1
TRSR3050	B W		2.5 ~ 3.5			5.0		
TRSR3055	B W		3.0 ~ 4.0			5.5		
TRSR3065	B W		4.0 ~ 5.0			6.5		
TRSR3075	B W		5.0 ~ 6.0			7.5		9.0
TRSR3080	B W		5.5 ~ 6.5			8.0		
TRSR3090	B W		6.5 ~ 7.5			9.0		
TRSR3100	B W		7.5 ~ 8.5			10.0		
TRSR3145	B W		11.5 ~ 13.0			14.5		15.5
TRSR3230	B W		20.5 ~ 21.5			23.0		

Part number example - TRSR3230B
 No installation tool required

Snap Rivet - TRSR Cross

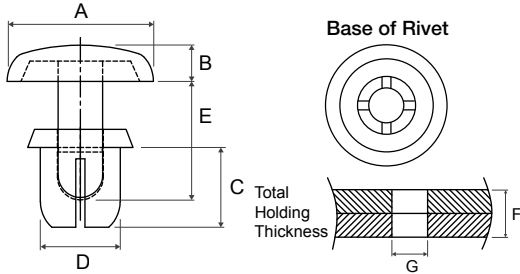

Type Snap Rivet TRSR Cross
 Material Nylon 6 UL94V/2 / TMS 052
 Nylon 46 (Heat Stabilised)
 Colour Black/White
 Unit mm
 Standard Pack 1,000 per bag

Please add B for black, W for white colour.
 Flame retardant - please add V0 at the end of the part number.

Heat resistant - add HR to part number, heat resistant to 150°C
 Part number example - TRSR6080B

Part Number	Insertion Force		≤ 4.0 kgf		Extraction Force			≤ 12.0 kgf	
	Colour	G	F	A	B	C	D	E	
TRSR3535	B	W	3.6 ~ 3.7	1.1 ~ 2.1	6.4	1.6	3.5	2.8	
TRSR3545	B	W		2.2 ~ 3.1					6.1
TRSR3550	B	W		2.7 ~ 3.6					
TRSR3555	B	W		3.2 ~ 4.1					
TRSR3560	B	W		3.7 ~ 4.6					
TRSR3570	B	W		4.7 ~ 5.6					
TRSR3580	B	W		5.7 ~ 6.6					

Part Number	Insertion Force		≤ 4.0 kgf		Extraction Force			≤ 20.0 kgf
	Colour	G	F	A	B	C	D	E
TRSR4040	B	W	4.1 ~ 4.2	1.7 ~ 2.5	8.0	1.8	4.0	5.1
TRSR4050	B	W		2.5 ~ 3.5				
TRSR4055	B	W		3.0 ~ 4.0				7.1
TRSR4060	B	W		3.5 ~ 4.5				
TRSR4070	B	W		4.5 ~ 5.5				
TRSR4080	B	W		5.5 ~ 6.5				
TRSR4090	B	W		6.5 ~ 7.5				
TRSR4100	B	W		7.5 ~ 8.5				
TRSR4120	B	W		9.0 ~ 10.5				14.0
TRSR4155	B	W		12.5 ~ 14.0				

Part Number	Insertion Force		≤ 5.0 kgf		Extraction Force			≤ 25.0 kgf
	Colour	G	F	A	B	C	D	E
TRSR5045	B	W	5.1 ~ 5.2	1.5 ~ 2.5	9.0	2.2	5.0	6.5
TRSR5055	B	W		2.5 ~ 3.5				
TRSR5065	B	W		3.5 ~ 4.5				
TRSR5075	B	W		4.5 ~ 5.5				
TRSR5085	B	W		5.5 ~ 6.5				
TRSR5095	B	W		6.5 ~ 7.5				
TRSR5105	B	W		7.5 ~ 8.5				10.5

Part Number	Insertion Force		≤ 6.0 kgf		Extraction Force			≤ 25.0 kgf	
	Colour	G	F	A	B	C	D	E	
TRSR5865	B	W	5.9 ~ 6.0	1.0 ~ 2.0	12.0	2.7	6.5	5.8	9.0

Part Number	Insertion Force		≤ 6.0 kgf		Extraction Force			≤ 30.0 kgf	
	Colour	G	F	A	B	C	D	E	
TRSR6060	B	W	6.0	2.5 ~ 4.0	12.0	2.5	6.0	30.0	9.0
TRSR6080	B	W		4.0 ~ 5.5		3.0	8.0		10.0