


|          |        |           |
|----------|--------|-----------|
| DASH NO. | M CODE | MADE FROM |
|----------|--------|-----------|

# GSD

UG-201A/U

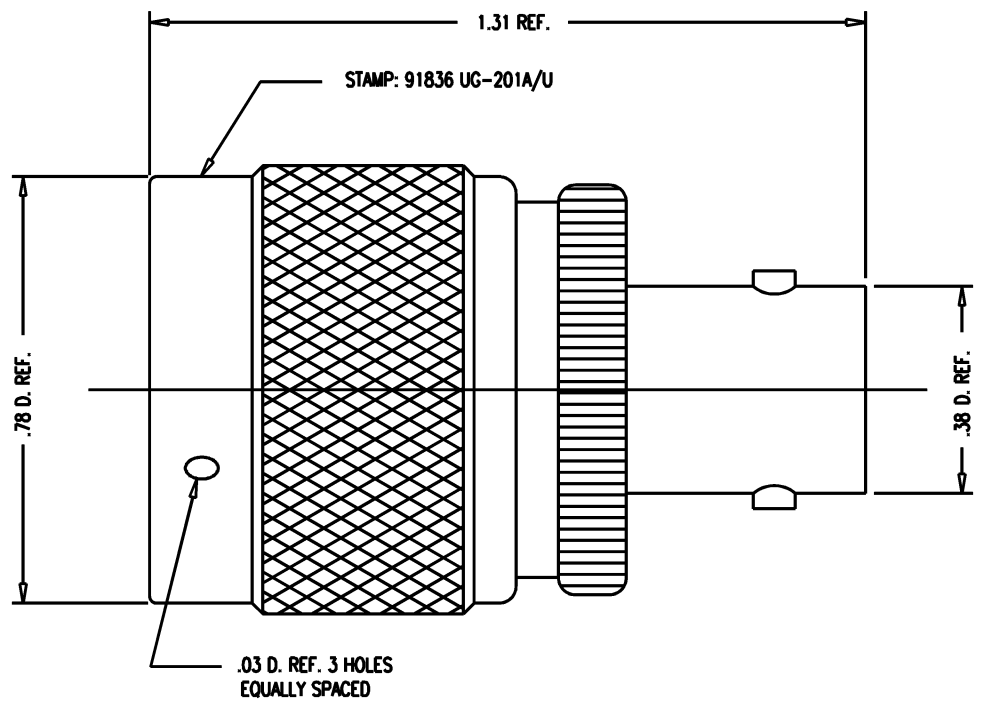

- NOTES:**
- INTERFACE PER MIL-STD-348, FIG. 304-1 (N) AND 301-2 (BNC).
  - MATERIALS:
    - INSULATOR: TEFLON, ASTM-D-4894
    - GASKET: SILICONE RUBBER, ZZ-R-765
    - C-RING } PHOSPHOR BRONZE, ASTM-B-103
    - OUTER CONTACT }
    - CENTER CONTACT: BER. COPPER, ASTM-B-196
    - ALL OTHER METAL PARTS: BRASS, ASTM-B16
  - FINISHES:
    - ALL METAL PARTS: SILVER PLATE PER QQ-S-365
  - ELECTRIAL CHARACTERISTICS:
    - NOMINAL IMPEDANCE: 50 ~W
    - FREQUENCY RANGE: DC TO 11 GHz
    - WORKING VOLTAGE: 500 VOLTS RMS

| REVISIONS |                                      |
|-----------|--------------------------------------|
| ISSUE     | CHANGES                              |
| 8         | CN 36539 C<br>REDRAWN<br>ME 09/01/95 |

QGS0801

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

ADAPTER N(M) TO BNC(F)

|       |    |          |
|-------|----|----------|
| DRAWN | ME | 09/01/95 |
|-------|----|----------|

|        |    |          |
|--------|----|----------|
| DESIGN | AR | 09/01/95 |
|--------|----|----------|

|       |  |      |
|-------|--|------|
| APPR. |  | DATE |
|-------|--|------|

**KINGS**  
ELECTRONICS CO., INC.  
TUCKAHOE, NEW YORK 10707

UG-201A/U

# GSD