

# VC1508

## 5.08mm SPACING, VERTICAL HEADER FOR EB1508

### TECHNICAL DATA

#### MECHANICAL

##### Operating Temperature:

-40°C to +105°C

-40°F to +221°F

##### Soldering Temperature:

260°C, 500°F for 5 seconds max

#### MATERIAL

##### Contact:

Brass, Tin Plated

##### Insulator Body:

Polyamide, UL 94V-0, Green

#### ELECTRICAL




##### Voltage Rating:

300VAC

##### Current Rating:

10 Amps

### DIMENSIONAL REFERENCE

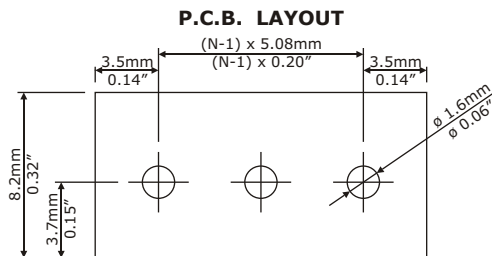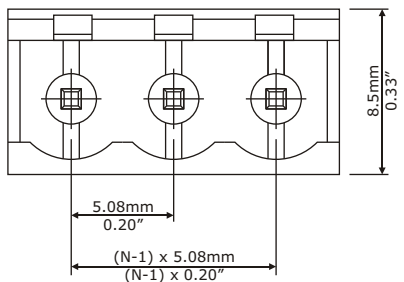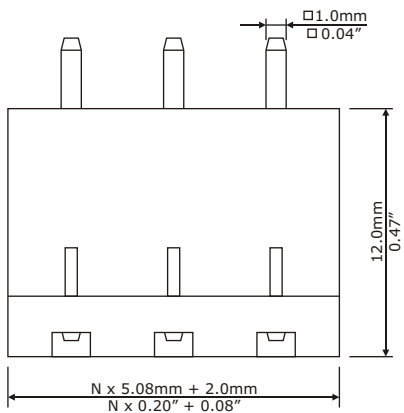

N = Number of contacts



Safety Approval:



### PART NUMBERING

**VC1508-XX**

NUMBER OF  
POSITIONS  
24 Maximum