


SERIES: VFK400W-DIN | DESCRIPTION: DC-DC CONVERTER
FEATURES

- up to 400 W isolated output
- rugged metal enclosure with integrated heat sink
- 4:1 input range (10~36 Vdc, 18~75 Vdc)
- single output from 12~48 Vdc
- 1,500 Vdc isolation
- over current, over temperature, over voltage, and short circuit protection
- remote on/off
- efficiency up to 87%
- comes with DIN-rail mount



| MODEL | input voltage range (Vdc) | output voltage (Vdc) | output current max (A) | output power max (W) | ripple and noise ¹ max (mVp-p) | efficiency max (%) |
|----------------------------------|---------------------------|----------------------|------------------------|----------------------|---|--------------------|
| VFK400W-Q24-S12-DIN | 10~36 | 12 | 33.3 | 400 | 200 | 87 |
| VFK400W-Q24-S24-DIN | 10~36 | 24 | 16.7 | 400 | 240 | 86 |
| VFK400W-Q24-S48-DIN | 10~36 | 48 | 8.3 | 398 | 480 | 86 |
| VFK400W-Q48-S12-DIN ² | 20~75 | 12 | 33.3 | 400 | 200 | 87 |
| VFK400W-Q48-S24-DIN | 18~75 | 24 | 16.7 | 400 | 240 | 86 |
| VFK400W-Q48-S48-DIN | 18~75 | 48 | 8.3 | 398 | 480 | 86.5 |

Note: 1. Ripple and noise are measured at full load, 20 MHz BW with 10 μ F tantalum capacitor and 1 μ F ceramic capacitor across the output. The 48 Vdc output models require a 22 μ F aluminum capacitor and a 1 μ F ceramic capacitor across the output.
 2. An external input capacitor of 470 μ F is recommended to reduce input ripple voltage.

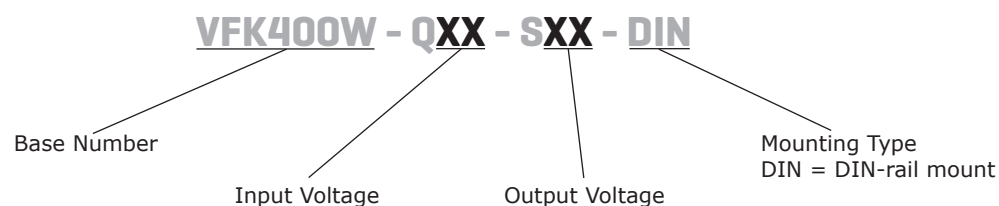PART NUMBER KEY


INPUT

| parameter | conditions/description | min | typ | max | units |
|-------------------------|------------------------|--|----------|--------------|------------|
| operating input voltage | 24 Vdc input | 10 | 24 | 36 | Vdc |
| | 48 Vdc input | 12 Vdc output model 24/48 Vdc output models | 20 18 | 48 48 | 75 75 |
| under voltage shutdown | 24 Vdc input | power up power down | | 9.5 8.5 | Vdc Vdc |
| | 48 Vdc input | power up power down | | 17.8 15.5 | Vdc Vdc |
| CTRL ¹ | positive logic | models ON (open circuit) | | | |
| | | models OFF (0~1.2 Vdc) | | | |
| filter | pi filter | | | | |

Note: 1. Do not drive high, may damage device.

OUTPUT

| parameter | conditions/description | min | typ | max | units |
|----------------------------|--------------------------------------|-----|-------|-------|-------|
| maximum output capacitance | for all models | | | 2,200 | μF |
| line regulation | measured from high line to low line | | | ±1 | % |
| load regulation | measured from full load to zero load | | | ±1 | % |
| voltage accuracy | | | | ±1.5 | % |
| adjustability | | 90 | | 105 | % |
| switching frequency | | | 250 | | kHz |
| transient response | 25% step load change | | | 500 | μs |
| temperature coefficient | | | ±0.03 | | %/°C |

PROTECTIONS

| parameter | conditions/description | min | typ | max | units |
|-----------------------------|--------------------------|-----|-----|-----|-------|
| short circuit protection | continuous | | | | |
| over current protection | % nominal output current | 110 | | 150 | % |
| over voltage protection | | 115 | | 140 | % |
| over temperature protection | shutdown | | 110 | | °C |

SAFETY AND COMPLIANCE

| parameter | conditions/description | min | typ | max | units |
|----------------------|---|-------|-----|-----|-------|
| isolation voltage | for 1 minute: input to output; input to case; output to case | 1,500 | | | Vdc |
| isolation resistance | | 10 | | | MΩ |
| RoHS | 2011/65/EU (CE) | | | | |

ENVIRONMENTAL

| parameter | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature | see derating curves | -40 | | 85 | °C |
| storage temperature | | -55 | | 105 | °C |

MECHANICAL

| parameter | conditions/description | min | typ | max | units |
|---------------|--|-----|------|-----|-------|
| dimensions | 7.83 x 5.00 x 2.11 (199.0 x 127.0 x 53.6 mm) | | | | inch |
| case material | steel and aluminum extrusion | | | | |
| weight | | | 1.53 | | kg |

MECHANICAL DRAWING

units: inch[mm]


tolerance: X.XX = ±0.02[±0.5]
 X.XXX = ±0.010[±0.25]

wire range: 22~12 AWG


screw size: #6-32

mounts to TS35 rails


| PIN CONNECTIONS | |
|-----------------|----------|
| PIN | FUNCTION |
| 1, 2 | +Vin |
| 3, 4 | -Vin |
| 5 | REM |
| 6 | CASE |
| 7, 8 | +Vout |
| 9 | +S |
| 10 | TRIM |
| 11 | -S |
| 12, 13 | -Vout |

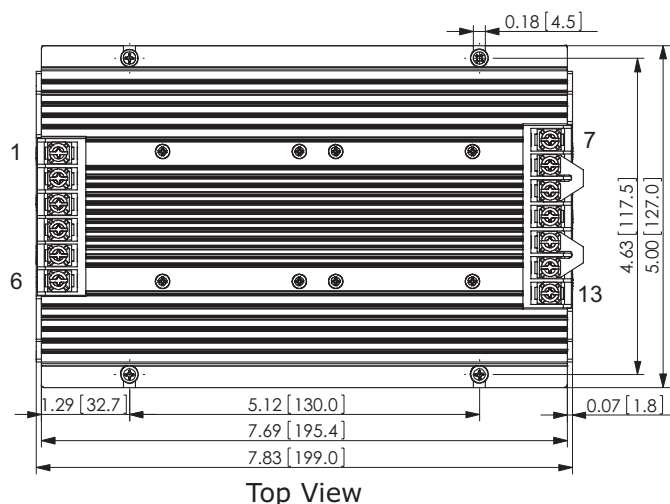


Top View

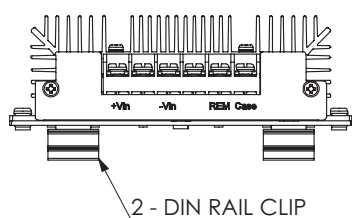


Front View

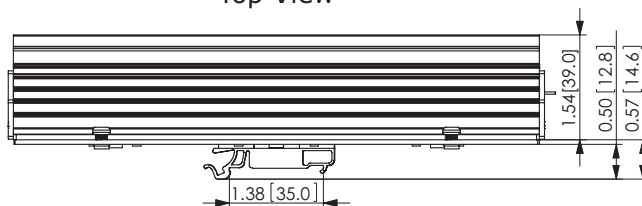

Side View


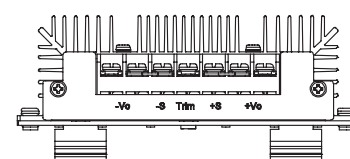


Back View

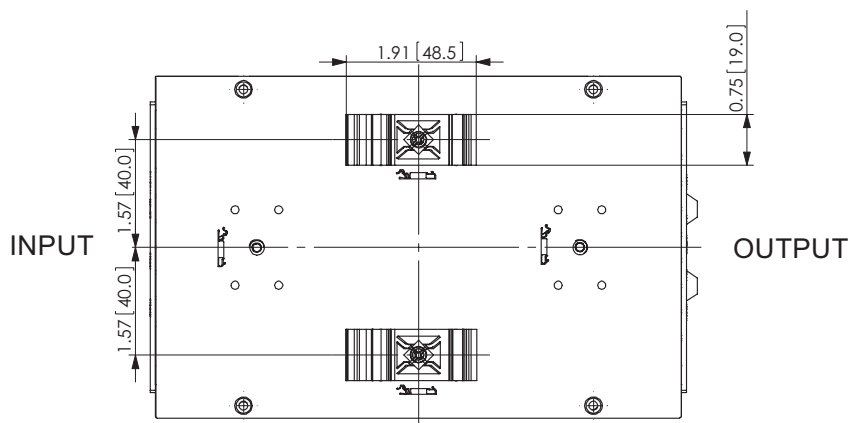

Bottom View

DERATING CURVES

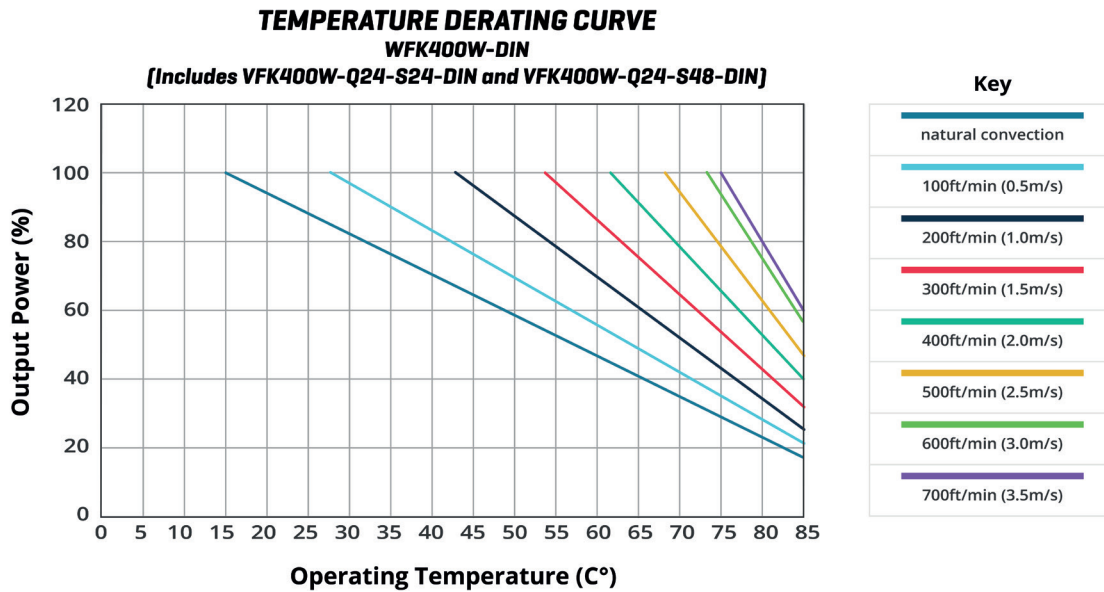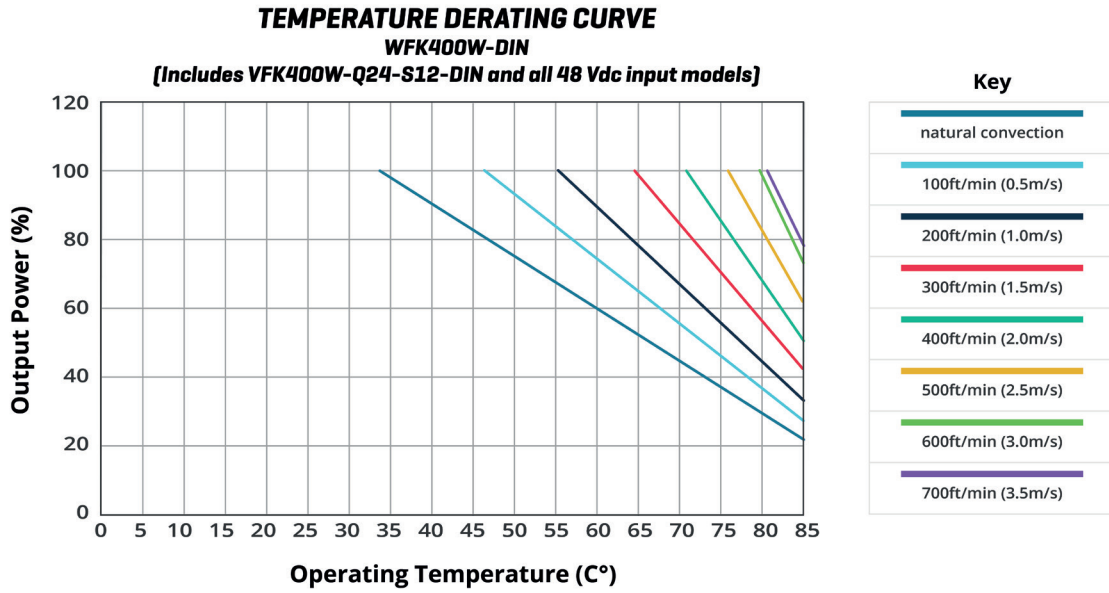

APPLICATION NOTES

1. Output Voltage Trimming

Leave open if not used.

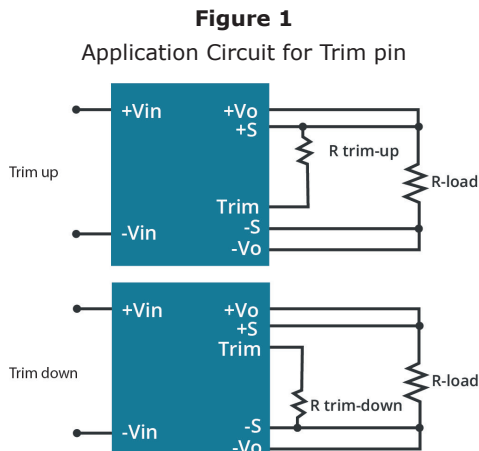


Table 1
Trim Up Resistor Values (MΩ)¹

| Desired Vout (%Vout) Nom. Vout (Vdc) | 101% | 102% | 103% | 104% | 105% |
|---|------|------|------|------|------|
| 12 | 2.2 | 1.6 | 1.2 | 0.82 | 0.68 |
| 24 | 4.3 | 3.3 | 2.2 | 1.6 | 1.5 |
| 48 | 10 | 6.8 | 4.8 | 3.9 | 3.5 |

Table 2
Trim Down Resistor Values (KΩ)

| Desired Vout (%Vout) Nom. Vout (Vdc) | 90% | 92% | 94% | 96% | 98% |
|---|-----|-----|-----|-----|-----|
| 12 | 9 | 12 | 22 | 51 | 100 |
| 24 | 12 | 22 | 51 | 100 | 300 |
| 48 | 22 | 32 | 49 | 100 | 300 |

Note: 1. VFK400W-Q48-S12-DIN model requires minimum input voltage of 21.6 Vdc in order to trim between 100~105%.

Note: All specifications measured at 25°C, nominal input voltage, and full load unless otherwise noted.

REVISION HISTORY

| rev. | description | date |
|------|--|------------|
| 1.0 | initial release | 01/03/2014 |
| 1.01 | changed DIN-rail mount | 06/16/2014 |
| 1.02 | CTRL line updated | 11/13/2020 |
| 1.03 | derating curve and trim circuit figure updated | 09/13/2021 |

The revision history provided is for informational purposes only and is believed to be accurate.



CUI INC
a bel group

Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.