

Interface module - VIP-2/SC/HD15SUB/F - 2322401

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and high density D-Subminiature female connector, for mounting on NS 35, no. of pos.: 15, width: 44.9 mm

The figure shows a 44-pos. version, with pin strip

Why buy this product

- Screw connection
- 1:1 connection



Key Commercial Data

Packing unit	1 STK
Weight per Piece (excluding packing)	120.000 g
Custom tariff number	85369010
Country of origin	United States

Technical data

Dimensions

Width	44.9 mm
Height	65.5 mm
Depth	45.1 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	125 V AC/DC
Max. perm. current (per branch)	1 A

Interface module - VIP-2/SC/HD15SUB/F - 2322401

Technical data

General

Number of positions	15
Status display	No
Mounting position	any

Connection data for connection 1

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12
Number of positions	15

Connection data for connection 2


Connection name	Controller level
Connection method	High-density D-SUB socket strip
Number of connections	1
Number of positions	15

Standards and Regulations


Connection in acc. with standard	CUL
Standards/regulations	EN 50178

Drawings

Dimensional drawing

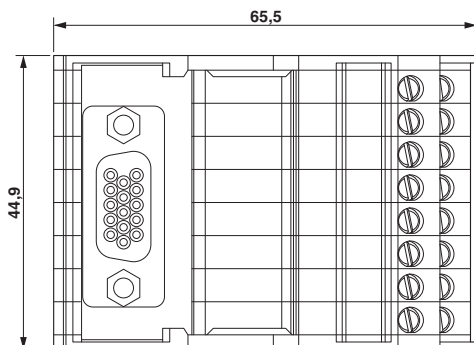

Circuit diagram

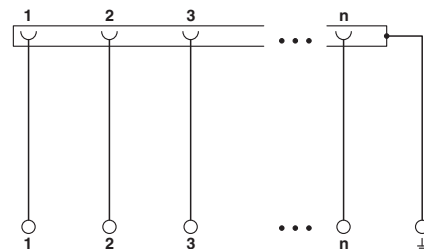

Universal circuit diagram

Interface module - VIP-2/SC/HD15SUB/F - 2322401

Approvals


Approvals


Approvals

UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

Ex Approvals


Approval details

UL Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 238705	
mm ² /AWG/kcmil	30-12
Nominal current I _N	1 A
Nominal voltage U _N	125 V

cUL Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 238705	
mm ² /AWG/kcmil	30-12
Nominal current I _N	1 A
Nominal voltage U _N	125 V

EAC 7500651.22.01.00246

EAC RU C-DE.A*30.B.01742

cULus Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm
--