

## Interface module - VIP-3/SC/HD26SUB/M - 2322375

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and high density D-SUB miniature pin strip, for mounting on NS 35 rails, no. of pos.: 26, width: 79 mm

The illustration shows a 44-position version

### Why buy this product

- Screw connection
- 1:1 connection



### Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 451673

### Technical data

#### Dimensions

Width	52.3 mm
Height	69 mm
Depth	62 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

Max. perm. operating voltage	125 V AC/DC
Max. perm. current (per branch)	1 A
Number of positions	26
Status display	No
Mounting position	any
Standards/regulations	EN 50178

# Interface module - VIP-3/SC/HD26SUB/M - 2322375

## Technical data

### Connection data for connection 1

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12
Number of positions	26

### Connection data for connection 2

Connection name	Controller level
Connection method	High density D-SUB pin strip
Number of connections	1
Number of positions	26

### Standards and Regulations

Connection in acc. with standard	CUL
Standards/regulations	EN 50178

## Classifications

### eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

### ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

### UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421

# Interface module - VIP-3/SC/HD26SUB/M - 2322375

## Classifications

### UNSPSC

UNSPSC 13.2	39121421
-------------	----------

## Approvals

### Approvals

### Approvals

cUL Recognized / UL Recognized / EAC / EAC / cULus Recognized

### Ex Approvals

### Approvals submitted

## Approval details

cUL Recognized	
mm <sup>2</sup> /AWG/kcmil	30-12
Nominal current I <sub>N</sub>	1 A
Nominal voltage U <sub>N</sub>	125 V

UL Recognized	
mm <sup>2</sup> /AWG/kcmil	30-12
Nominal current I <sub>N</sub>	1 A
Nominal voltage U <sub>N</sub>	125 V



EAC
-----

EAC
-----

cULus Recognized
------------------

## Interface module - VIP-3/SC/HD26SUB/M - 2322375

### Drawings

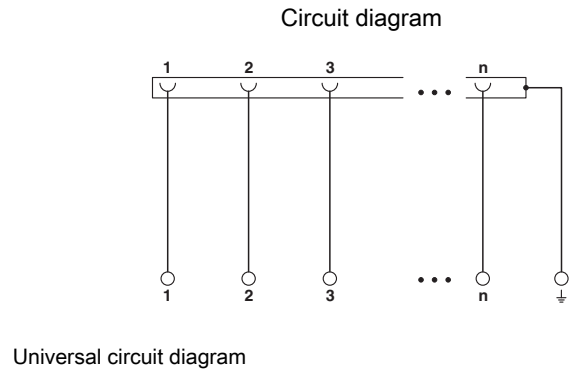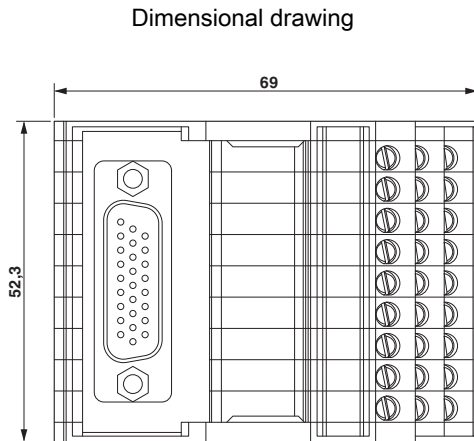

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>