

Interface module - VIP-3/SC/RJ45 - 2900701

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module with screw connection and RJ45 connector

Why buy this product

- Connector housing led to separate connection terminal blocks
- RJ45 connector, 8-pos.
- Screw or spring-cage connection (direct plug-in technology)
- 1:1 connection



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 547802

Technical data

Dimensions

Width	26.9 mm
Height	69 mm
Depth	62 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	48 V AC/DC
Max. perm. current (per branch)	1 A
Max. permissible current (all branches)	4 A
Number of positions	8
Status display	No

Interface module - VIP-3/SC/RJ45 - 2900701

Technical data

General

Mounting position	any
Standards/regulations	DIN EN 50178

Connection data for connection 1

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M 3
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Connection data for connection 2

Connection name	Controller level
Connection method	RJ45 socket
Number of connections	1
Number of positions	8

Standards and Regulations

Standards/regulations	DIN EN 50178
-----------------------	--------------

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421

Interface module - VIP-3/SC/RJ45 - 2900701

Classifications

UNSPSC

UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Approvals

Approvals


Approvals

CSA / EAC / EAC / UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals


Approvals submitted

Approval details

CSA 	
mm ² /AWG/kcmil	28-12
Nominal current IN	1 A
Nominal voltage UN	48 V

EAC

EAC

UL Recognized 	
mm ² /AWG/kcmil	30-12
Nominal current IN	1 A
Nominal voltage UN	48 V

Interface module - VIP-3/SC/RJ45 - 2900701

Approvals


cUL Recognized	
mm ² /AWG/kcmil	30-12
Nominal current I _N	1 A
Nominal voltage U _N	48 V

EAC

cULus Recognized

Drawings

Circuit diagram

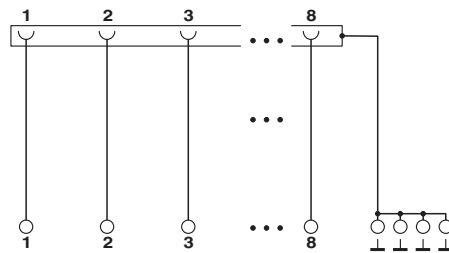

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>