




HEAT SHRINK TUBING

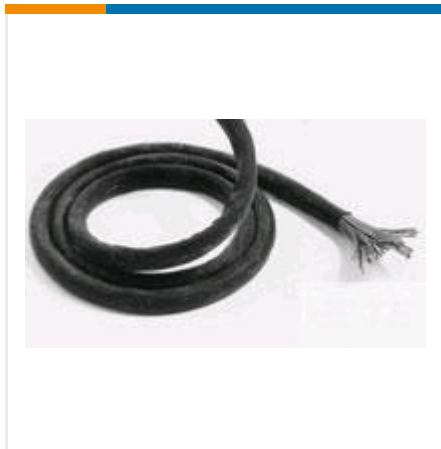

✓ Active

TE CONNECTIVITY (TE)

VPB-3-0-SP

Raychem | SP

VPB-3-0-SP

TE Internal Number: 5580644001

Alias ID: 4-1194406-9

EU RoHS Compliant

EU ELV Compliant

Wall Type Single

Resistant To Abrasion, Fluids, Wrinkling

Low Outgassing No

Product Source UK, US

Packaging Method Piece

DOCUMENTATION

Product Specifications

Product Specification

THERMOFIT VITON POLYMER BLEND TUBING Fluoroelastomer, Flexible, Abrasion Resistant, Heat-Shrinkable

PDF

English

FEATURES

Please review product documents or [contact us](#) for the latest agency approval information.

Product Type Features

Wall Type Single

Body Features

Material Systems Code 30

Shrink Ratio 2:1

Color Black

Flexibility Flexible

Material Polymer Blend Fluoroelastomer

Fluid Type Aviation Fuel, Chemicals/Solvents, De-Icing Fluid, Diesel Fuel, Lubricating Oil, Unleaded Gasoline

Dimensions

Expanded Inside Diameter (Min) 76.2 mm [3 in]

Recovered Wall Thickness (Nominal) 1.63 mm [.065 in]

Usage Conditions

Shrink Temperature (Min) (°C) 175

Resistant To Abrasion, Fluids, Wrinkling

Recovery Temperature (°C) 175

Operating Temperature Range (°C) -55 – 150

Flammability Flame-Retardant

Fluid Resistance Splash Protection

Packaging Features

Packaging Method Piece

Other

Low Outgassing No

Product Source UK, US

PRODUCT COMPLIANCE



Statement of Compliance

Statement of Compliance

PDF
