




## HEAT SHRINK TUBING

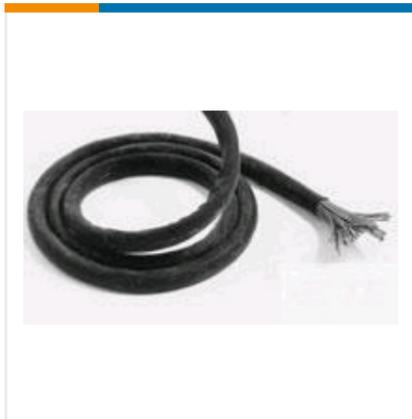

✓ Active

TE CONNECTIVITY (TE)

### VPB-5/8-0-SP

Raychem | SP

VPB-5/8-0-SP

TE Internal Number: 5580654002

Alias ID: 5-1194406-6

EU RoHS Compliant

EU ELV Compliant

Wall Type Single

Resistant To Abrasion, Fluids, Wrinkling

Low Outgassing No

Product Source UK, US

Packaging Method Piece

## DOCUMENTATION

Product Specifications

Product Specification

**THERMOFIT VITON POLYMER BLEND TUBING Fluoroelastomer, Flexible, Abrasion Resistant, Heat-Shrinkable**

PDF

English

**Thermofit Viton Polymer Blend Molded Components Flame Resistant, Flexible, Heat-Shrinkable**

PDF

English

## FEATURES

Please review product documents or [contact us](#) for the latest agency approval information.

## Product Type Features

**Wall Type** Single

---

## Body Features

**Material Systems Code** 30

**Shrink Ratio** 2:1

**Color** Black

**Flexibility** Flexible

**Material** Polymer Blend Fluoroelastomer

**Fluid Type** Aviation Fuel, Chemicals/Solvents, De-Icing Fluid, Diesel Fuel, Lubricating Oil, Unleaded Gasoline

---

## Dimensions

**Expanded Inside Diameter (Min)** 15.87 mm [ .625 in ]

**Recovered Wall Thickness (Nominal)** 1.06 mm [ .042 in ]

---

## Usage Conditions

**Shrink Temperature (Min) (°C)** 175

**Resistant To** Abrasion, Fluids, Wrinkling

**Recovery Temperature (°C)** 175

**Operating Temperature Range (°C)** -55 – 150

**Flammability** Flame-Retardant

**Fluid Resistance** Splash Protection

---

## Packaging Features

**Packaging Method** Piece

---

## Other

**Low Outgassing** No

**Product Source** UK, US

---

## PRODUCT COMPLIANCE



### Statement of Compliance

#### **Statement of Compliance**

PDF

---