

Network cable - VS-M12FSBP-IP20-93E-LI/0,3 - 1403157

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled Ethernet cable, CAT5e, shielded, 2-pair, 26 AWG stranded (7-wire), RAL 5021 (water blue), M12 flush-type socket, rear/screw mounting with SPEEDCON to RJ45 plug/IP20, line, length: 0.3 m



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
Weight per Piece (excluding packing)	40.0 g
Custom tariff number	85444290
Country of origin	Poland

Technical data

Mechanical characteristics

Number of positions	4
Shielded	yes
Insertion/withdrawal cycles	≥ 100
Cable diameter	6.70 mm
Cable exit	straight
Cable structure	2x2xAWG26/7; SF/UTP
Length of cable	0.3 m

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C (cable, fixed installation)
	-5 °C ... 60 °C (cable, flexible installation)

Material data

Outer sheath, material	PUR
External sheath, color	water blue RAL 5021

Network cable - VS-M12FSBP-IP20-93E-LI/0,3 - 1403157

Technical data

Electrical characteristics

Transmission characteristics (category)	CAT5 (IEC 11801:2002)
---	-----------------------

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27060307
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	27060308
eCl@ss 9.0	27060308

ETIM

ETIM 3.0	EC000830
ETIM 4.0	EC002061
ETIM 5.0	EC002599

UNSPSC

UNSPSC 6.01	26121616
UNSPSC 7.0901	26121616
UNSPSC 11	26121604
UNSPSC 12.01	31261501
UNSPSC 13.2	26121616

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted

Network cable - VS-M12FSBP-IP20-93E-LI/0,3 - 1403157


Approvals

Approval details


EAC

Drawings

Dimensional drawing




Cable cross section




Housing cutout for M16 fastening thread, mounting panel with feed-through Ethernet [93E] hole (alternatively with surface as protection against rotation)

Dimensional drawing



Dimensional drawing

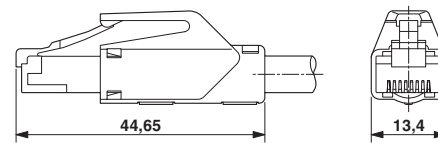

M12 flush-type connector