

RJ11 socket insert - VS-RJ11-BU-MOD/BU - 1656356


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Socket insert RJ11, modular system (Keystone), 6-pos., unshielded



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 029803
GTIN	4046356029803
Weight per Piece (excluding packing)	8.500 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Dimensions

Type	Socket
------	--------

Ambient conditions

Ambient temperature (operation)	-20 °C ... 70 °C
---------------------------------	------------------

General data

Number of positions	6
Alternative short product description	RJ11 socket insert
Rated voltage (III/3)	60 V
Connection method	Female
Contact material	Copper alloy
Contact carrier material	Thermoplastic

RJ11 socket insert - VS-RJ11-BU-MOD/BU - 1656356

Technical data

General data

Contact surface material	Gold over nickel
--------------------------	------------------

Standards and Regulations

Flammability rating according to UL 94	V0
--	----


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

RJ11 socket insert - VS-RJ11-BU-MOD/BU - 1656356

Dimensional drawing

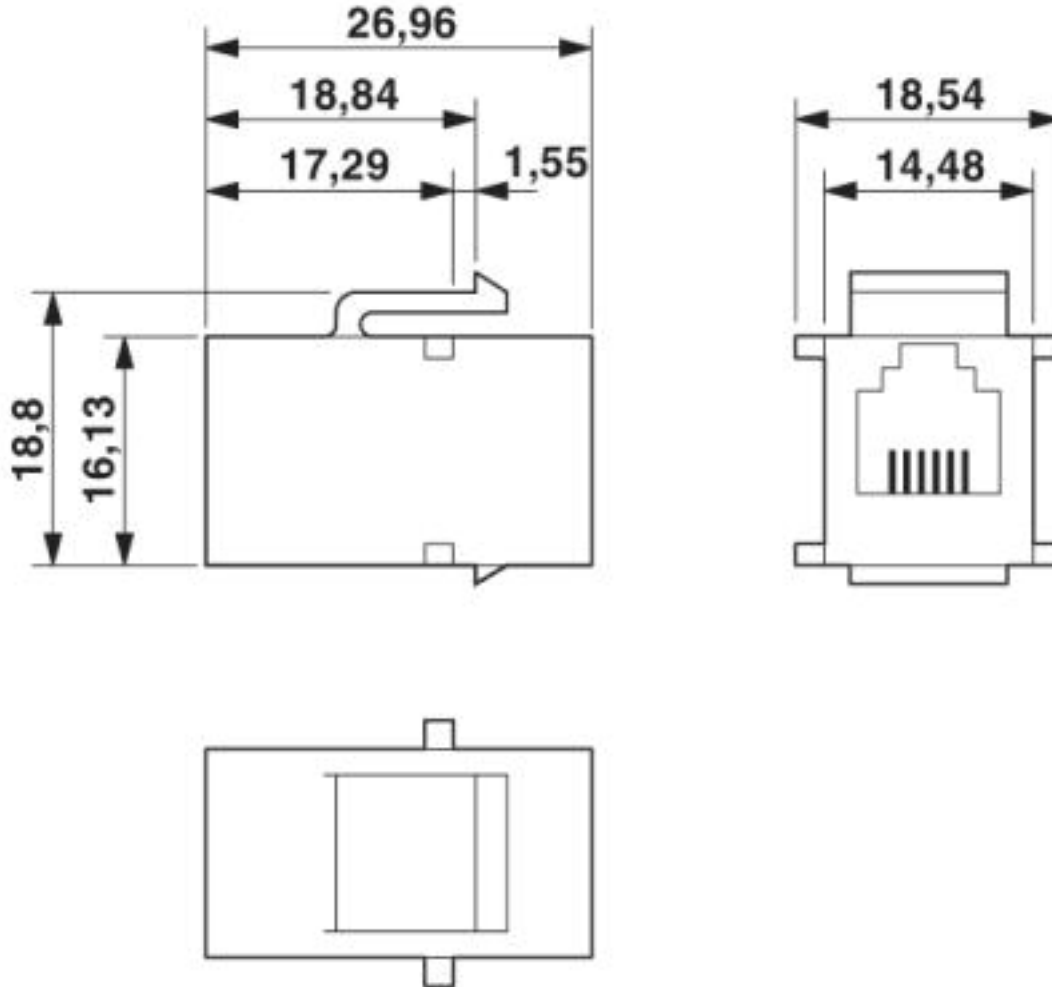

RJ11 female insert

Classifications

eCl@ss

eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27260700
eCl@ss 6.0	27260700
eCl@ss 7.0	27440312
eCl@ss 8.0	27440312

RJ11 socket insert - VS-RJ11-BU-MOD/BU - 1656356

Classifications

eCl@ss

eCl@ss 9.0	27440205
------------	----------

ETIM

ETIM 2.0	EC000438
ETIM 3.0	EC000438
ETIM 4.0	EC000438
ETIM 5.0	EC001121
ETIM 6.0	EC000438
ETIM 7.0	EC000438

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	39121522

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.01742
-----	---	---------