

PANEL MOUNT INDICATOR, NON-RELAMPABLE

NEON TECHNOLOGY

MOUNTING HOLE, Ø 0.500"

| PART NO. | LENS COLOR | VOLTAGE | CURRENT [mA] | RATED LIFE HOURS |
|---------------------------|------------|------------|--------------|------------------|
| NEON 115VAC SERIES | | | | |
| WL-1060C1 | RED | 105-125VAC | 1.5mA | 25,000 |
| WL-1060C3 | AMBER | 105-125VAC | 1.5mA | 25,000 |
| WL-1060C4 | WHITE | 105-125VAC | 1.5mA | 25,000 |
| WL-1060C5 | GREEN | 105-125VAC | 1.5mA | 25,000 |
| NEON 230VAC SERIES | | | | |
| WL-1061C1 | RED | 208-250VAC | 1.5mA | 25,000 |
| WL-1061C3 | AMBER | 208-250VAC | 1.5mA | 25,000 |
| WL-1061C4 | WHITE | 208-250VAC | 1.5mA | 25,000 |
| WL-1061C5 | GREEN | 208-250VAC | 1.5mA | 25,000 |
| NEON 480VAC SERIES | | | | |
| WL-1062C1 | RED | 432-528VAC | 1.5mA | 25,000 |
| WL-1062C3 | AMBER | 432-528VAC | 1.5mA | 25,000 |
| WL-1062C4 | WHITE | 432-528VAC | 1.5mA | 25,000 |
| WL-1062C5 | GREEN | 432-528VAC | 1.5mA | 25,000 |
| NEON 600VAC SERIES | | | | |
| WL-1063C1 | RED | 540-660VAC | 1.5mA | 25,000 |
| WL-1063C3 | AMBER | 540-660VAC | 1.5mA | 25,000 |
| WL-1063C4 | WHITE | 540-660VAC | 1.5mA | 25,000 |
| WL-1063C5 | GREEN | 540-660VAC | 1.5mA | 25,000 |

NOTES


1. Recommended panel thickness
0.030" to 0.090"
2. 6" leads with 1/2" strip are standard
3. Storage temperature
 T_{STG} : -25°C - +80°C
4. Ambient temperature
 T_A : -20°C - +60°C
5. Voltage tolerance
 V_{OP} : ±10%
6. Body material
Polycarbonate, white
7. Lens material
Polycarbonate
8. Bezel material
Stainless steel
9. Wire gauge
20 AWG
10. Wire strip
1/2"

CERTIFICATIONS

UL (E340667), RoHS



DIMENSIONAL CHARACTERISTICS

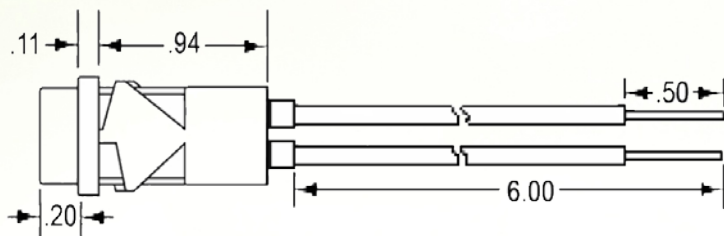

unless otherwise specified, all dimensions are in inches



OPTIONS

Additional options and lens styles available. Please contact Wamco for more information.

