


Gel: UL 94-HB


**Operating temperature:**  
-60°C / +200°C  
**Installation temperature:**  
-40°C / +110°C  
**Dielectric strength:**  
> 23 kV/mm  
**Degree of protection:**  
IP68 (in proper casings)



# Wonder Fluid

Single component insulation fluid gel cartridge

- Ready-to-use fluid gel
- Created for filling new Raytech joint shells with no-return valves
- Suitable for filling trays
- Does not solidify when opened
- No waste
- No shelf life

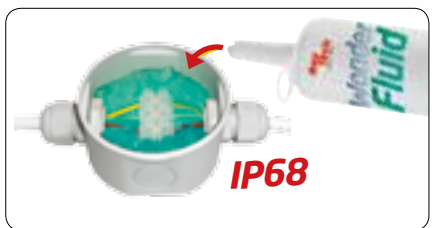

## Wonder Fluid

Product	Colour	Package type	Total quantity
Wonder Fluid 210	●	Cartridge with measuring nozzle	210 ml
Wonder Fluid 280	●	Cartridge with measuring nozzle	280 ml