

1.1x3.4mm RECTANGULAR SOLID LAMP

Part Number: WP1004GD

Green


Features

- LOW POWER CONSUMPTION.
- RELIABLE AND RUGGED.
- EXCELLENT UNIFORMITY OF LIGHT OUTPUT.
- SUITABLE FOR LEVEL INDICATOR.
- LONG LIFE-SOLID STATE RELIABILITY.
- RoHS COMPLIANT.

Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Package Dimensions

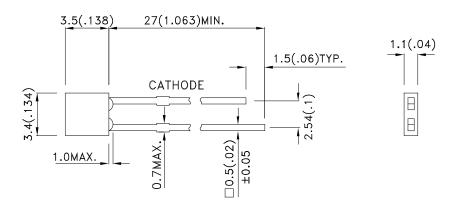

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.
- Lead spacing is measured where the leads emerge from the package.
 Specifications are subject to change without notice.





SPEC NO: DSAH7509 **REV NO: V.1 DATE: SEP/10/2007** PAGE: 1 OF 4 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: R.Chen ERP: 1101000300

Kingbright

Selection Guide

Part No.	Dice	Lens Type	lv (mcd) [2] @ 10mA		Viewing Angle [1]
			Min.	Тур.	201/2
WP1004GD	Green (GaP)	GREEN DIFFUSED	3	8	100°

- 1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value. 2. Luminous intensity/ luminous Flux: +/-15%.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD [1]	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Green	2.2	2.5	V	IF=20mA
lR	Reverse Current	Green		10	uA	V _R = 5V

- 1.Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V.


Absolute Maximum Ratings at TA=25°C

Parameter	Green	Units		
Power dissipation	62.5	mW		
DC Forward Current	25	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating/Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2]	260°C For 3 Seconds			
Lead Solder Temperature [3]	260°C For 5 Seconds			

- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2. 2mm below package base.
- 3. 5mm below package base.


SPEC NO: DSAH7509 **REV NO: V.1 DATE: SEP/10/2007** PAGE: 2 OF 4 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: R.Chen ERP: 1101000300


Kingbright

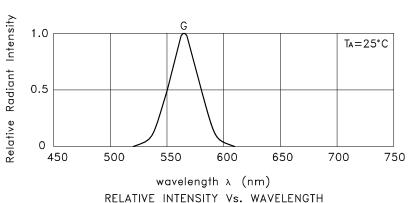



RELATIVE INTERSTIT VS. WAVELEROTT


Green WP1004GD












 SPEC NO: DSAH7509
 REV NO: V.1
 DATE: SEP/10/2007
 PAGE: 3 OF 4

 APPROVED: WYNEC
 CHECKED: Allen Liu
 DRAWN: R.Chen
 ERP: 1101000300

Kingbright

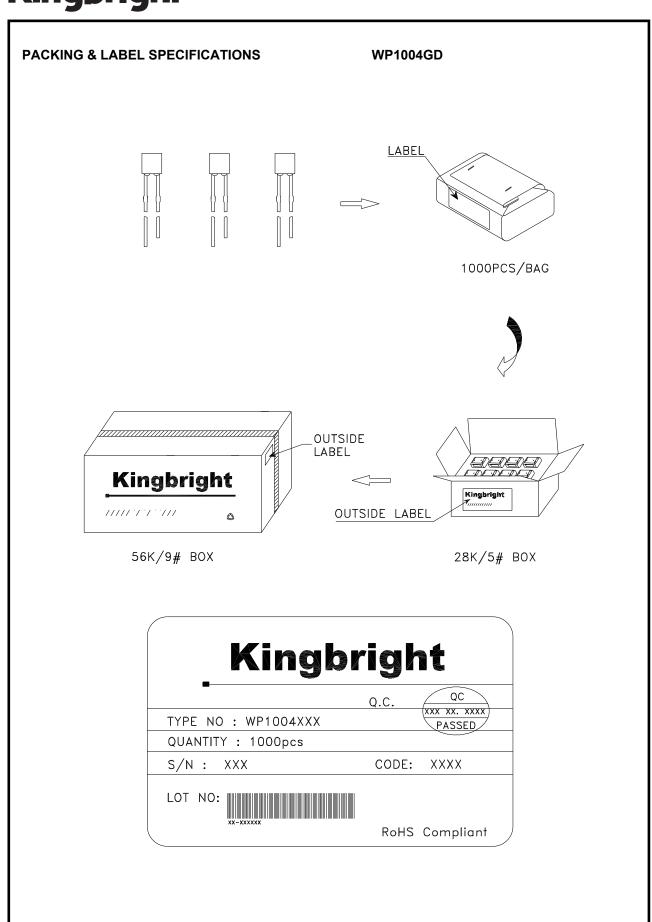

SPEC NO: DSAH7509 APPROVED: WYNEC REV NO: V.1 CHECKED: Allen Liu DATE: SEP/10/2007 DRAWN: R.Chen PAGE: 4 OF 4 ERP: 1101000300