

T-1 (3mm) SOLID STATE LAMP

Part Number: WP1154GT

GREEN


Features

- •LOW POWER CONSUMPTION.
- ●POPULAR T-1 DIAMETER PACKAGE.
- •GENERAL PURPOSE LEADS.
- •RELIABLE AND RUGGED.
- •LONG LIFE SOLID STATE RELIABILITY.
- •AVAILABLE ON TAPE AND REEL.
- •RoHS COMPLIANT.

Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Package Dimensions

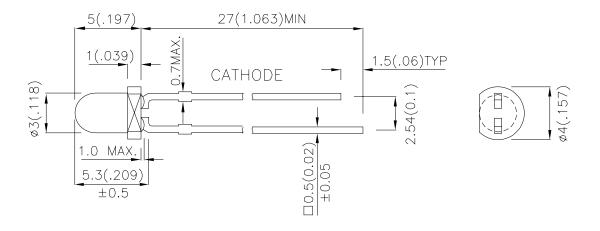

Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.
- 3. Lead spacing is measured where the leads emerge from the package.
- 4. Specifications are subject to change without notice.

 SPEC NO: DSAF2119
 REV NO: V.2
 DATE: SEP/01/2006
 PAGE: 1 OF 4

 APPROVED: J. Lu
 CHECKED: Allen Liu
 DRAWN: S.J.LIU
 ERP:1101000666

Kingbright

Selection Guide

Part No.	Dice	Lens Type	lv (mcd) [2] @ 10mA		Viewing Angle [1]
			Min.	Тур.	201/2
WP1154GT	GREEN (GaP)	GREEN TRANSPARENT	18	40	50°

Notes

- 1. θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
- 2. Luminous intensity / luminous flux: +/-15%.

Electrical / Optical Characteristics at Ta=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD [1]	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Green	2.2	2.5	V	IF=20mA
IR	Reverse Current	Green		10	uA	VR = 5V

Notes:

- 1.Wavelength: +/-1nm.
- 2. Forward Voltage: +/-0.1V.

Absolute Maximum Ratings at Ta=25°C


Parameter	Green	Units		
Power dissipation	105	mW		
DC Forward Current	25	mA		
Peak Forward Current [1]	ent [1] 140			
Reverse Voltage	5	V		
Operating/Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2]	260°C For 3 Seconds			
Lead Solder Temperature [3]	260°C For 5 Seconds			

Notes:

- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2. 2mm below package base.
- 3. 5mm below package base.


SPEC NO: DSAF2119 REV NO: V.2 DATE: SEP/01/2006 PAGE: 2 OF 4
APPROVED: J. Lu CHECKED: Allen Liu DRAWN: S.J.LIU ERP:1101000666

Kingbright

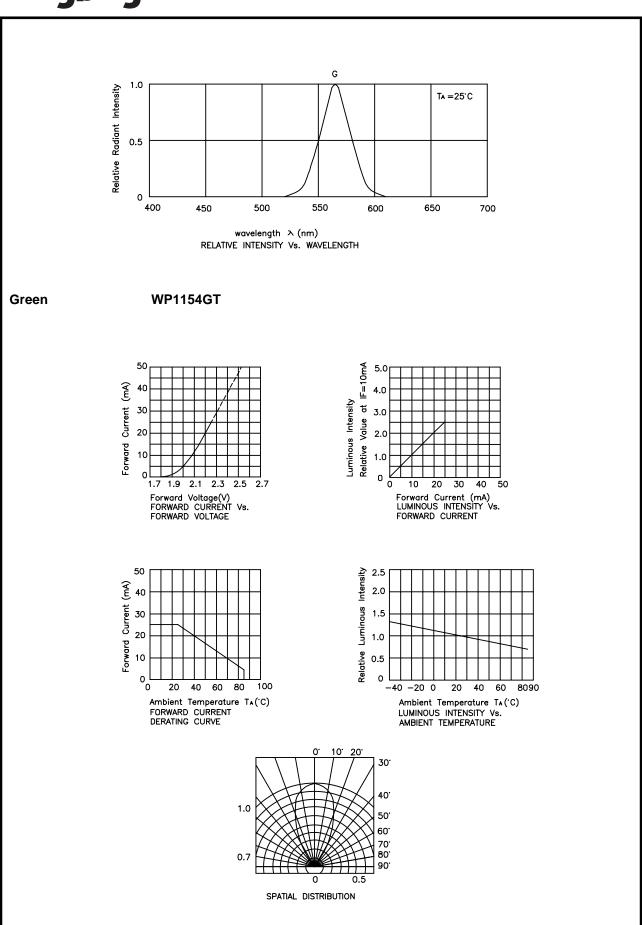

SPEC NO: DSAF2119 REV NO: V.2 DATE: SEP/01/2006 PAGE: 3 OF 4
APPROVED: J. Lu CHECKED: Allen Liu DRAWN: S.J.LIU ERP:1101000666

Kingbright

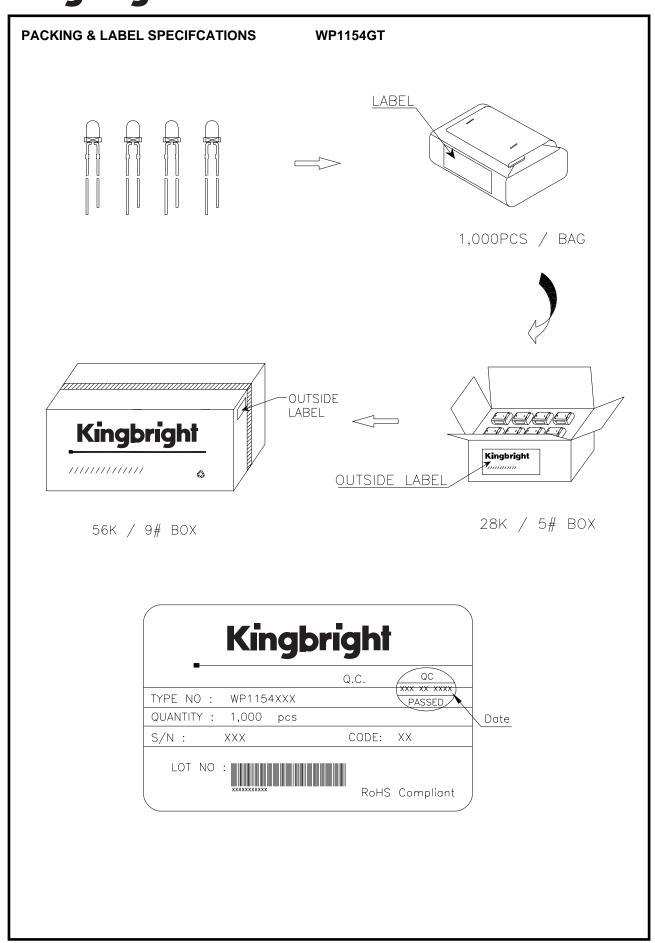

SPEC NO: DSAF2119 APPROVED: J. Lu REV NO: V.2 CHECKED: Allen Liu DATE: SEP/01/2006 DRAWN: S.J.LIU PAGE: 4 OF 4 ERP:1101000666