

## T-1 (3mm) SOLID STATE LAMP

Part Number: WP1154YT

YELLOW


### **Features**

- •LOW POWER CONSUMPTION.
- •POPULAR T-1 DIAMETER PACKAGE.
- •GENERAL PURPOSE LEADS.
- •RELIABLE AND RUGGED.
- •LONG LIFE SOLID STATE RELIABILITY.
- •AVAILABLE ON TAPE AND REEL.
- •RoHS COMPLIANT.

## **Description**

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

## **Package Dimensions**

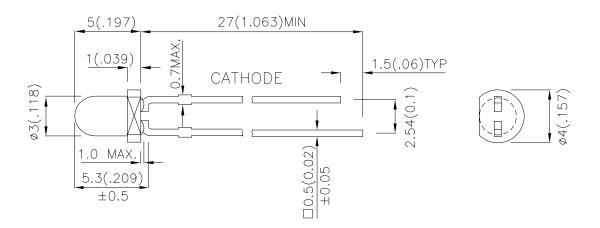

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ±0.25(0.01") unless otherwise noted.

  3. Lead spacing is measured where the leads emerge from the package.

  4. Specifications are subject to change without notice.

SPEC NO: DSAF2126 **REV NO: V.2** DATE: SEP/01/2006 PAGE: 1 OF 4 APPROVED: J. Lu **CHECKED: Allen Liu DRAWN: S.J.LIU** ERP:1101000767

## **Kingbright**

## **Selection Guide**

Part No.	Dice	Lens Type	lv (mcd) [2] @ 10mA		Viewing Angle [1]
			Min.	Тур.	201/2
WP1154YT	YELLOW (GaAsP/GaP)	YELLOW TRANSPARENT	8	20	50°

### Notes

- 1.  $\theta$ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
- 2. Luminous intensity / luminous flux: +/-15%.

## Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Yellow	590		nm	IF=20mA
λD [1]	Dominant Wavelength	Yellow	588		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Yellow	35		nm	IF=20mA
С	Capacitance	Yellow	20		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Yellow	2.1	2.5	V	IF=20mA
IR	Reverse Current	Yellow		10	uA	VR = 5V

## Notes:

- 1.Wavelength: +/-1nm.
- 2. Forward Voltage: +/-0.1V.

## Absolute Maximum Ratings at TA=25°C

Parameter	Yellow	Units			
Power dissipation	105	mW			
DC Forward Current	30	mA			
Peak Forward Current [1]	140	mA			
Reverse Voltage	5	V			
Operating / Storage Temperature	-40°C To +85°C				
Lead Solder Temperature [2]	260°C For 3 Seconds				
Lead Solder Temperature [3]	260°C For 5 Seconds				


### Notes

- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2. 2mm below package base.
- 3. 5mm below package base.

 SPEC NO: DSAF2126
 REV NO: V.2
 DATE: SEP/01/2006
 PAGE: 2 OF 4

 APPROVED: J. Lu
 CHECKED: Allen Liu
 DRAWN: S.J.LIU
 ERP:1101000767


# Kingbright

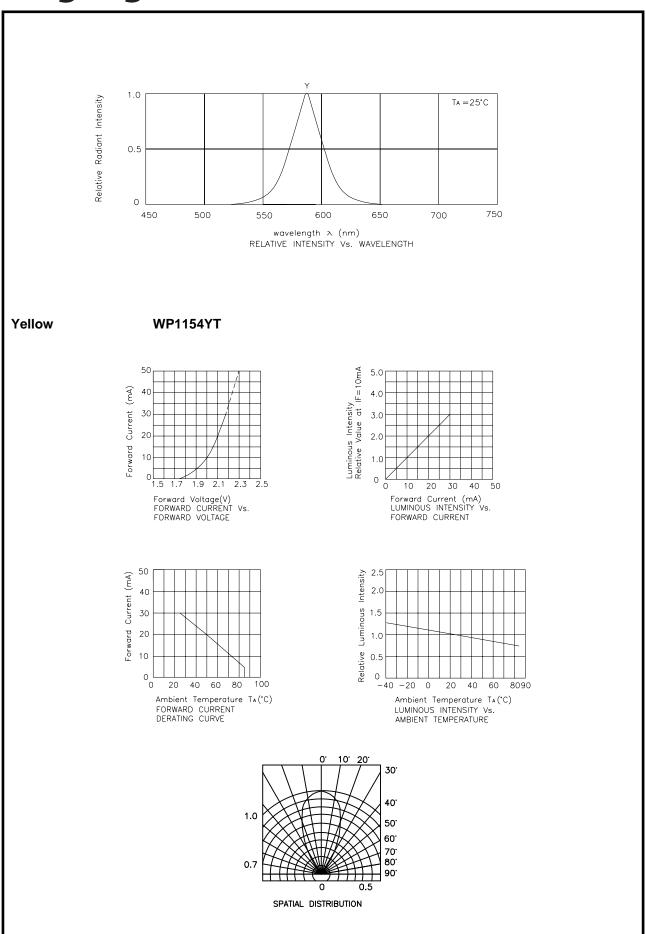

 SPEC NO: DSAF2126
 REV NO: V.2
 DATE: SEP/01/2006
 PAGE: 3 OF 4

 APPROVED: J. Lu
 CHECKED: Allen Liu
 DRAWN: S.J.LIU
 ERP:1101000767

## Kingbright

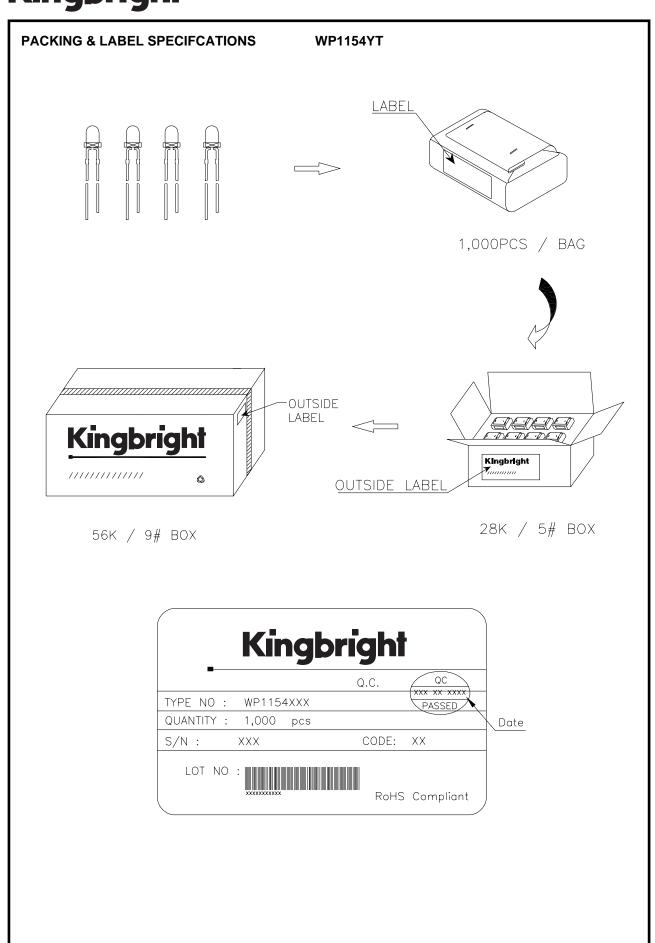

SPEC NO: DSAF2126 APPROVED: J. Lu REV NO: V.2 CHECKED: Allen Liu DATE: SEP/01/2006 DRAWN: S.J.LIU PAGE: 4 OF 4 ERP:1101000767