
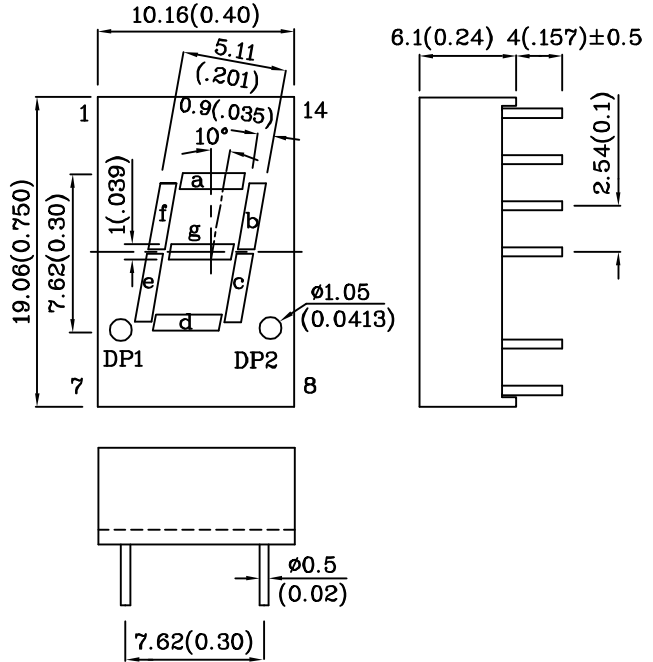


Features

- 0.3 INCH DIGIT HEIGHT.
- EXCELLENT CHARACTER APPEARANCE.
- EASY MOUNTING ON P.C. BOARDS OR SOCKETS.
- I.C. COMPATIBLE.
- MECHANICALLY RUGGED.
- STANDARD: GRAY FACE, WHITE SEGMENT.
- RoHS COMPLIANT.

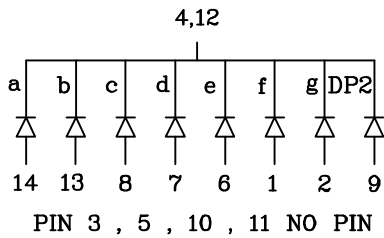


Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25(0.01") unless otherwise noted.





| Absolute Maximum Ratings (TA=25°C) | | MR (GaAlAs) | Unit |
|---|---------------------|----------------|------|
| Reverse voltage | VR | 5 | V |
| Forward current | IF | 30 | mA |
| Forward current (peak) 1/10Duty cycle 0.1ms pulse width | iFS | 155 | mA |
| Power dissipation | PT | 100 | mW |
| Operating temperature | TA | -40 ~ +85 | °C |
| Storage temperature | Tstg | -40 ~ +85 | |
| Lead solder temperature [2mm below package base] | 260°C For 5 Seconds | | |

| Operating Characteristics (TA=25°C) | | MR (GaAlAs) | Unit |
|--|--------|----------------|------|
| Forward Voltage (Typ.) (IF=10mA) | VF | 1.8 | V |
| Forward Voltage (Max.) (IF=10mA) | VF | 2.5 | V |
| Reverse Current (VR=5V) | IR | 10 | uA |
| Wavelength of Peak Emission (IF=10mA) | λ peak | 660 | nm |
| Wavelength of Dominant Emission (IF=10mA) | λ D | 640 | nm |
| Spectral Line Full Width At Half-Maximum (IF=10mA) | Δλ | 20 | nm |
| Capacitance (VF=0V, f=1MHz) | C | 45 | pF |


| Part Number | Emitting Color | Emitting Material | Luminous Intensity (IF=10mA) ucd | | Wavelength nm λ P | Description |
|-------------|----------------|-------------------|--|-------|-------------------------|----------------------------------|
| | | | min. | typ. | | |
| XDMR07C | Red | GaAlAs | 8000 | 25990 | 660 | Common Cathode, Rt. Hand Decimal |

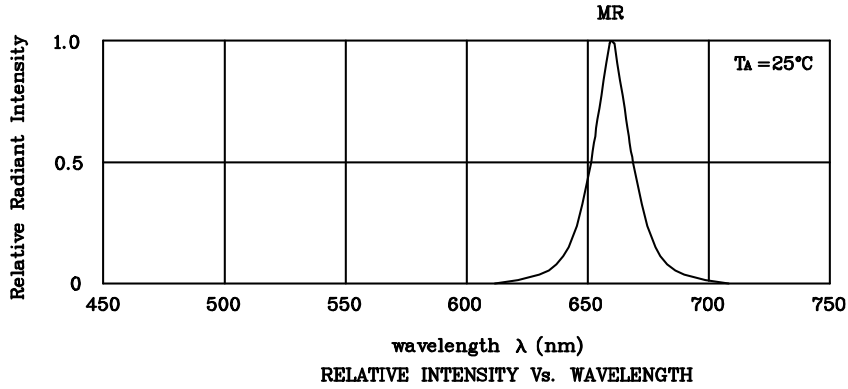

❖ MR

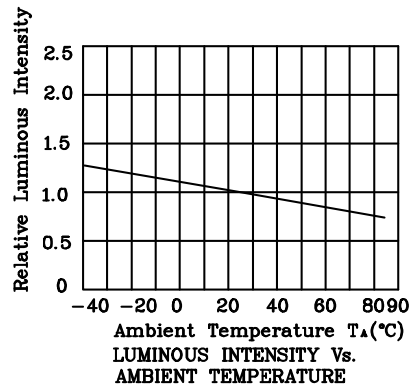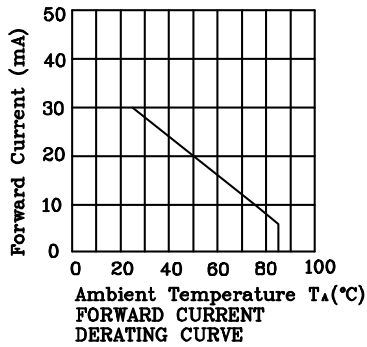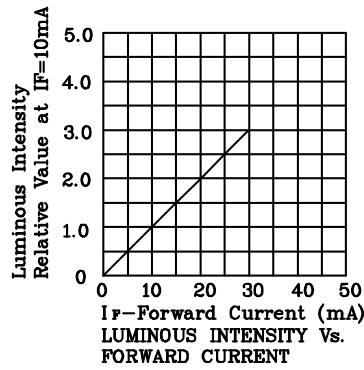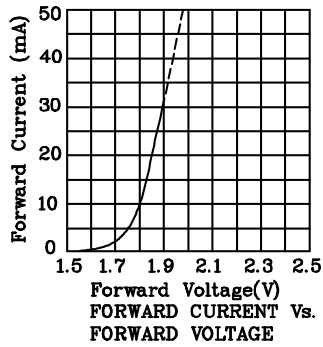

XDMR07C

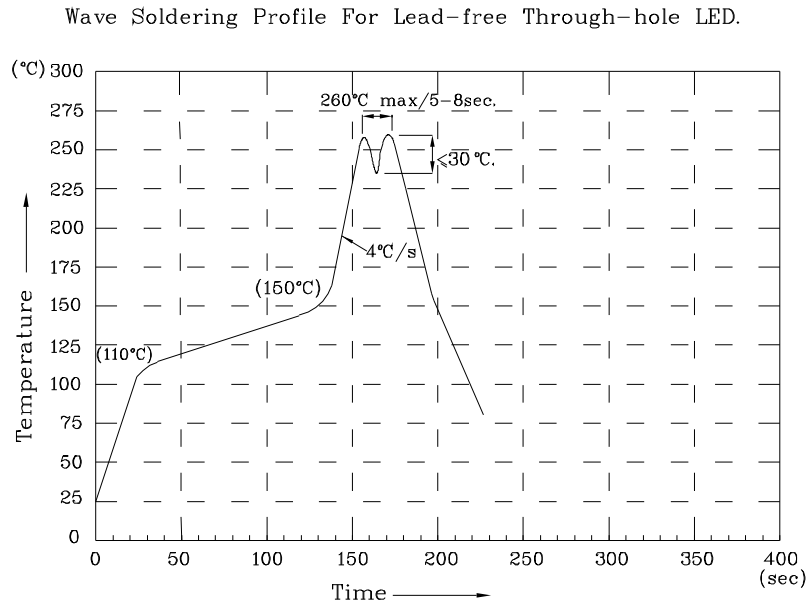

NOTES:

- 1.Recommend the wave temperature 245°C~260°C.The maximum soldering temperature should be less than 260°C.
- 2.Do not apply stress on epoxy resins when temperature is over 85 degree°C.
- 3.The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
- 4.No more than once.

Remarks:

If special sorting is required (e.g. binning based on forward voltage, luminous intensity, or wavelength), the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm
2. Luminous Intensity: +/-15%
3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.