



Features

- 5.0 INCH DIGIT HEIGHT.
- LOW CURRENT OPERATION.
- EXCELLENT CHARACTER APPEARANCE.
- EASY MOUNTING ON P.C. BOARDS OR SOCKETS.
- I.C. COMPATIBLE.
- CATEGORIZED FOR LUMINOUS INTENSITY.
- MECHANICALLY RUGGED.
- STANDARD : GRAY FACE,WHITE SEGMENT.
- RoHS COMPLIANT.

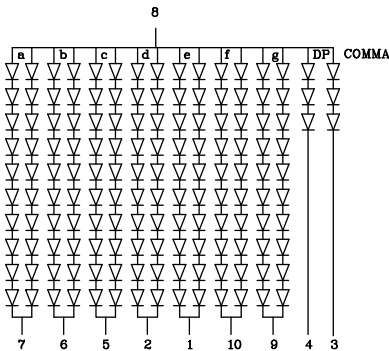

Notes:


1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.

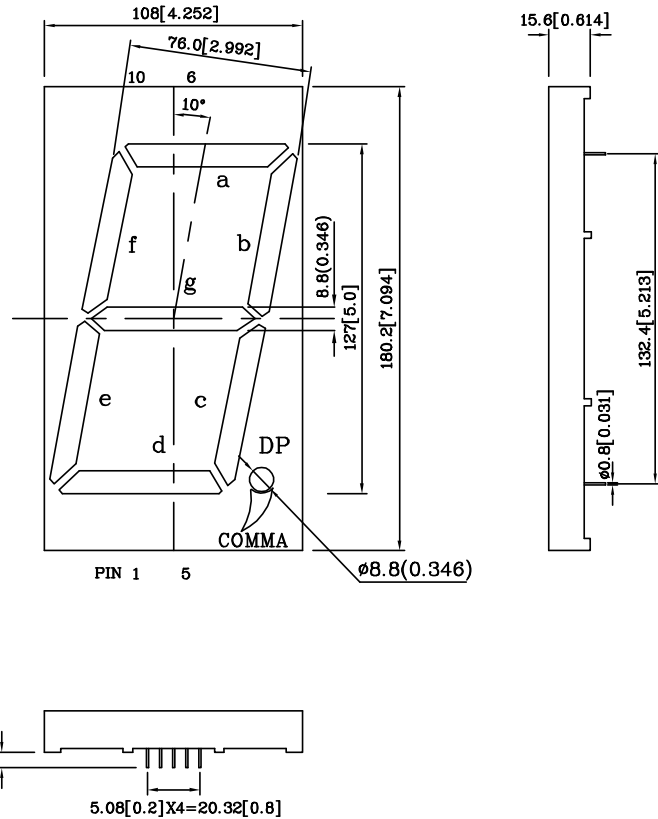





Absolute maximum ratings (TA=25°C)		UY (GaAsP/ GaP)	Unit
Reverse Voltage Per Segment or (Dp and Comma)	VR	50 (15)	V
DC Forward Current Per Segment or (Dp and Comma)	IF	60 (30)	mA
Forward Current (Peak) Per Segment or (Dp and Comma) 1/10 Duty Cycle 0.1ms Pulse Width	iFS	280 (140)	mA
Power Dissipation Per Segment or (Dp and Comma)	PT	1500 (225)	mW
Operating Temperature	TA	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +85	
Lead Solder Temperature [2mm Below Package Base]	260°C For 5 Seconds		

Operating Characteristics (TA=25°C)		UY (GaAsP/ GaP)	Unit
Forward Voltage (Typ.) (IF=10mA) Per Segment or (Dp and Comma)	VF	19.5 (5.85)	V
Forward Voltage (Max.) (IF=10mA) Per Segment or (Dp and Comma)	VF	25.0 (7.5)	V
Reverse Current (VR=50V(15V)) Per Segment or (Dp and Comma)	IR	20 (10)	uA
Wavelength of Peak Emission (IF=10mA)	λp	590	nm
Wavelength of Dominant Emission (IF=10mA)	λD	588	nm
Spectral Line Full Width At Half- Maximum (IF=10mA)	$\Delta\lambda$	35	nm
Capacitance (Per Segment) (VF=0V, f=1MHz)	C	20	pF


Part Number	Emitting Color	Emitting Material	Luminous Intensity (IF=10mA) ucd		Wavelength nm λP	Description
			min.	typ.		
XDUY127A-A	Yellow	GaAsP/GaP	12000	31890	590	Common Anode, Rt. Hand Decimal
Published Date : JUN 01,2005						
Drawing No : XDSA0157						
V5						
Checked : Shin Chi						
P.1/3						

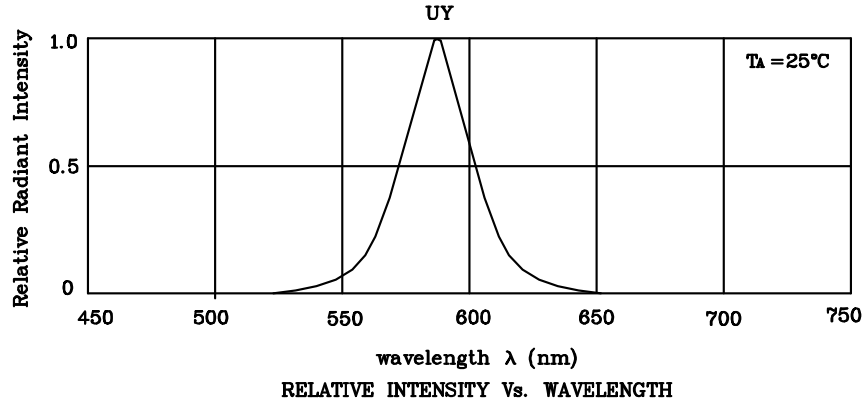

◆ UY

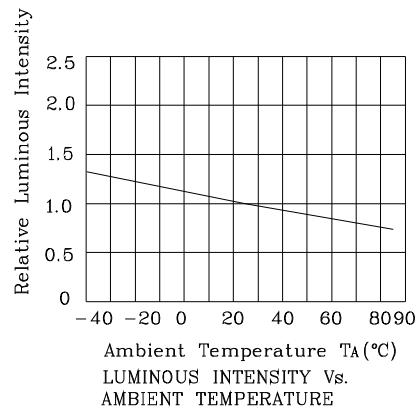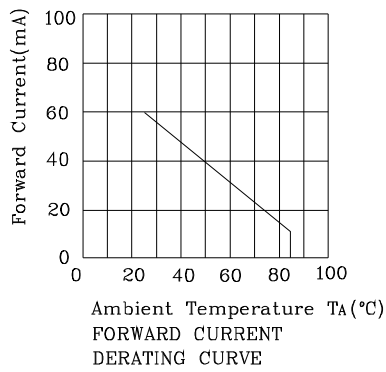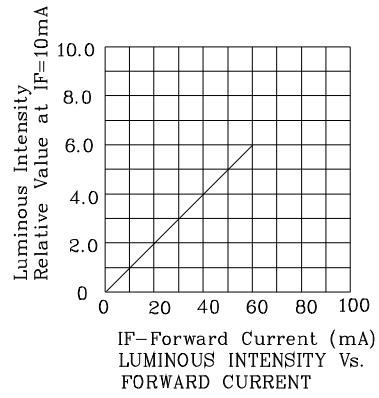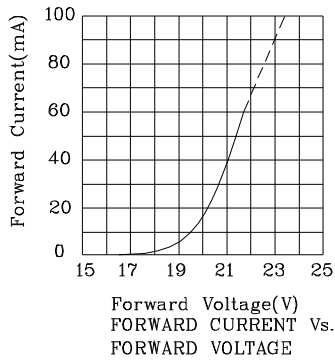

Wave Soldering Profile For Lead-free Through-hole LED.

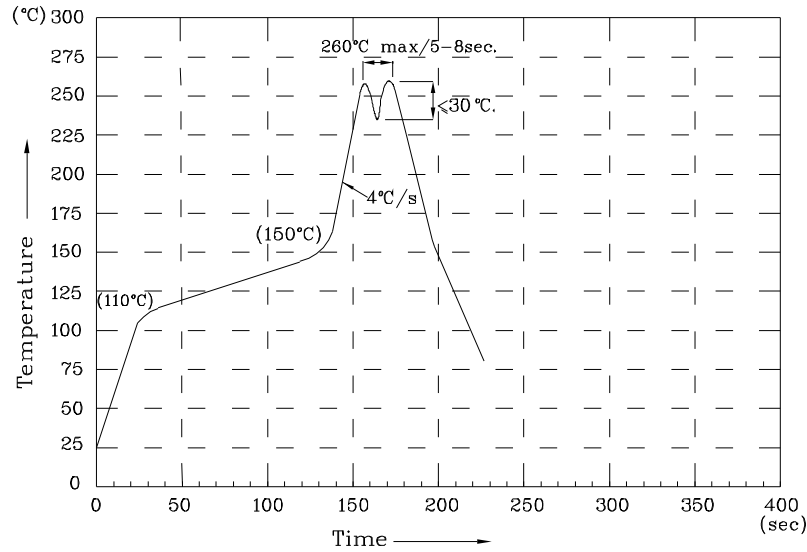

NOTES:

- 1.Recommend the wave temperature 245°C~260°C.The maximum soldering temperature should be less than 260°C.
- 2.Do not apply stress on epoxy resins when temperature is over 85 degree°C.
- 3.The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
- 4.No more than once.

Remarks:

If special sorting is required (e.g. binning based on forward voltage, luminous intensity, or wavelength), the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm
2. Luminous Intensity: +/-15%
3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.