


***Features**

- High sensing accuracy.
- High current transfer ratio.
- Both-sides mounting type.
- RoHS Compliant.

***Applications**

- OA equipment, such as floppy disk drives, printers, facsimiles, etc
- VCRs

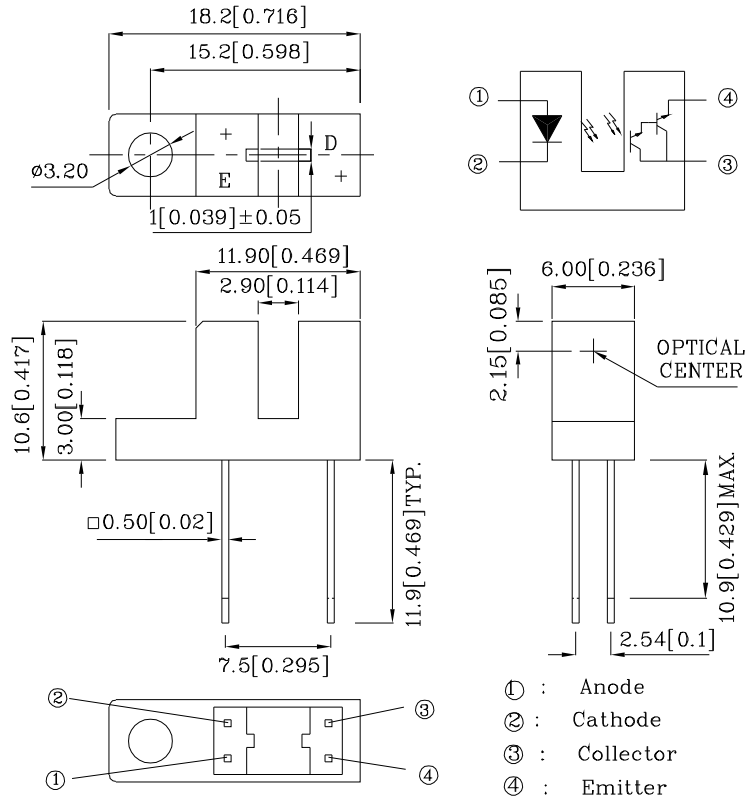

UNIT : MM[INCH]
TOLERANCE : $\pm 0.25[\pm 0.01]$ UNLESS OTHERWISE NOTED.

Absolute Maximum Ratings (T_A=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	Reverse voltage	V _R	6	V
	Power dissipation	P _d	75	mW
	Peak Forward Current (Pulse Width ≤ 100uS, Duty Cycle =1%)	I _{FP}	1	A
Output	Collector-emitter voltage	V _{CEO}	35	V
	Emitter-collector voltage	V _{ECO}	6	V
	Collector current	I _C	40	mA
	Collector power dissipation	P _C	75	mW
Operating temperature		T _{opr}	-25~+85	°C
Storage temperature		T _{stg}	-40~+100	°C
Soldering temperature (1/16 inch from body for 5 seconds)		T _{sol}	260	°C

Electrical-optical Characteristics at $T_A=25^\circ\text{C}$

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit	
Input	Forward voltage	V_F	$I_F=20\text{mA}$	1.0	1.2	1.5	V	
	Peak forward voltage	V_{FM}	$I_{FM}=0.5\text{A}$	-	2	3	V	
	Reverse current	I_R	$V_R=6\text{V}$	-	-	10	μA	
	Peak Wavelength	λ_P	$I_F=20\text{mA}$	-	940	-	nm	
Output	Collector dark current	I_{CEO}	$V_{CE}=10\text{V}, I_F=0\text{mA}$	-	-	10^{-6}	A	
Transfer Characteristics	Current transfer ratio	CTR	$V_{CE}=2\text{V}, I_F=1\text{mA}$	-	650	-	%	
	Collector-emitter saturation voltage	$V_{CE(SAT)}$	$I_F=2\text{mA}, I_C=1\text{mA}$	-	-	1.0	V	
	Response time	Rise time	t_r	$V_{CE}=2\text{V}, I_C=10\text{mA}$ $R_L=100\ \Omega$	-	90	400	μSec
		Fall time	t_f		-	80	300	μSec

Fig.1 FORWARD CURRENT Vs. FORWARD VOLTAGE

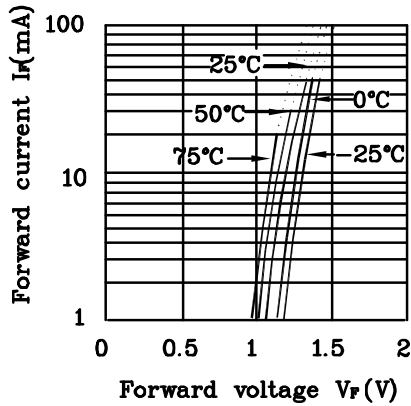


Fig.2 COLLECTOR CURRENT Vs. FORWARD CURRENT

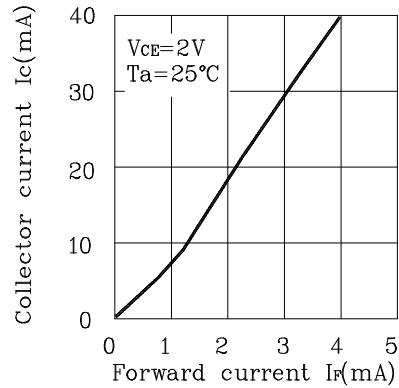


Fig.3 COLLECTOR CURRENT Vs. COLLECTOR-EMITTER VOLTAGE

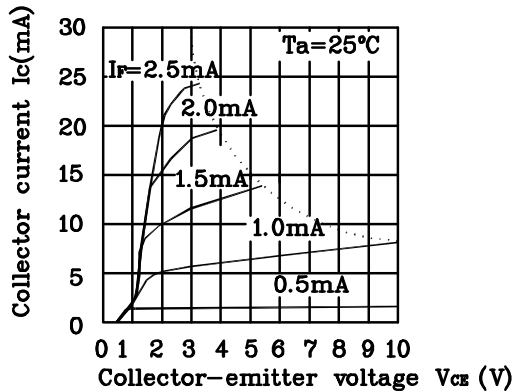


Fig.4 Collector Current vs. Ambient Temperature

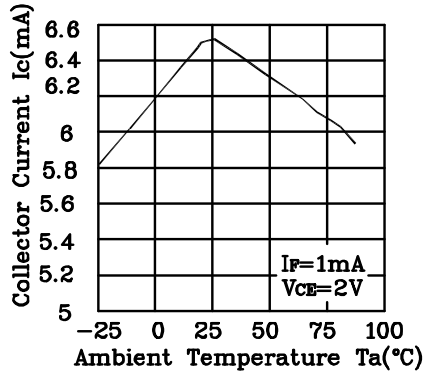


Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature

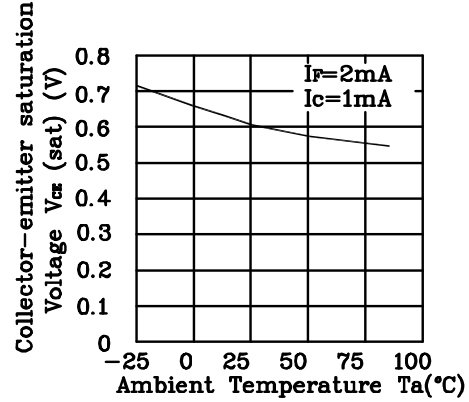


Fig.6 Relative Collector Current vs. Shield Distance(1)

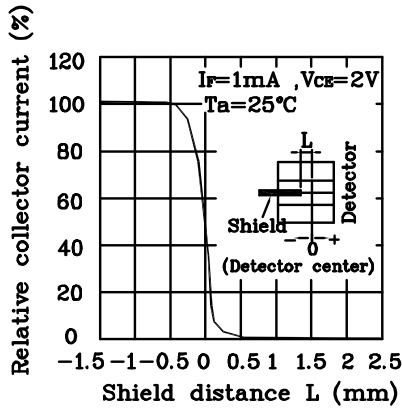


Fig.7 Relative Collector Current vs. Shield Distance(2)



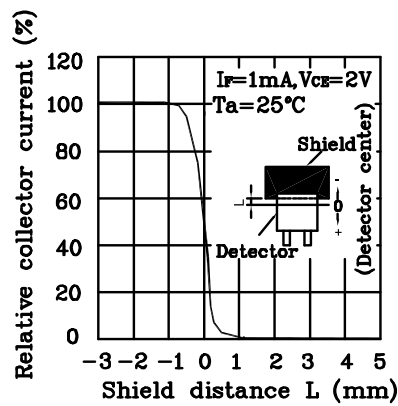



Fig.8 Response Time vs. Load Resistance

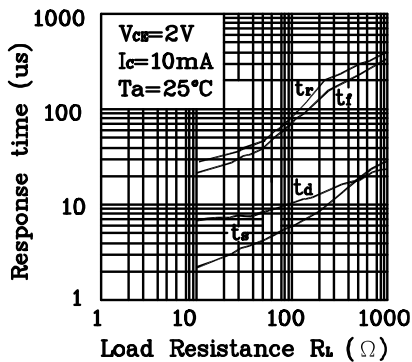


Test Circuit for Response Time

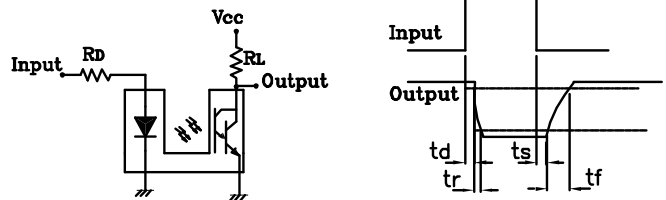

XPI-A12

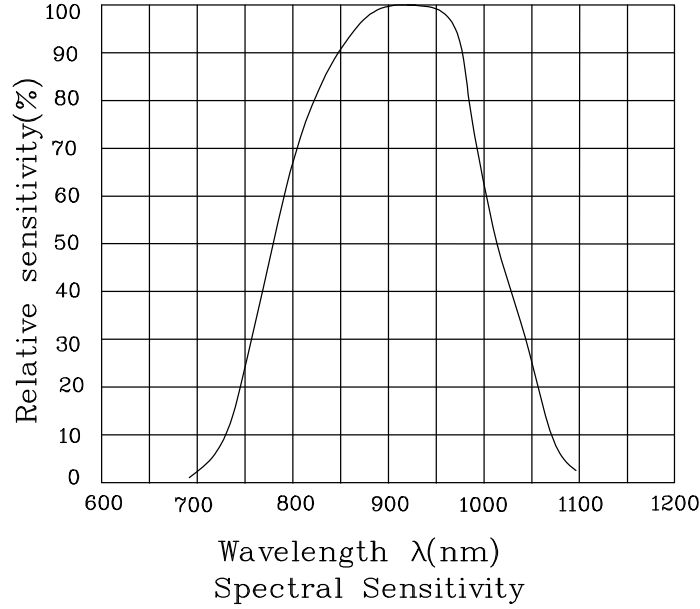

Wave Soldering Profile For Lead-free Through-hole LED.

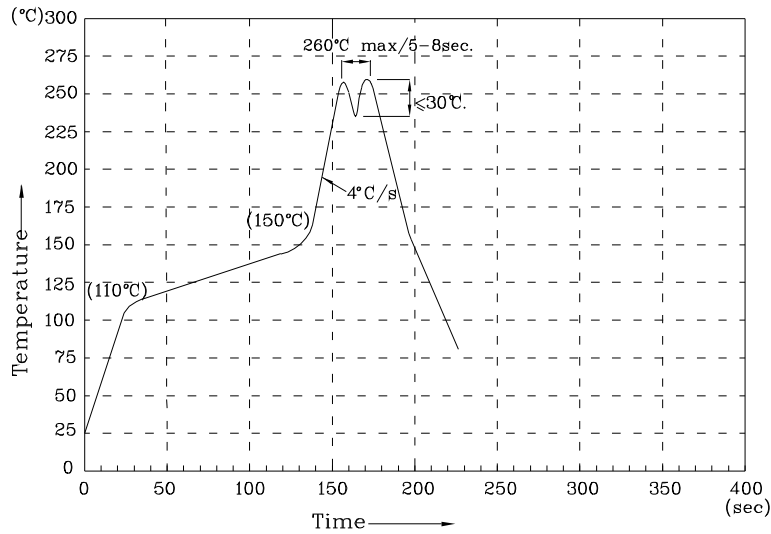

NOTE:

- 1.Recommend the wave temperature 245°C~260°C.The maximum soldering temperature should be less than 260°C.
- 2.Do not apply stress on epoxy resins when temperature is over 85 degree°C.
- 3.The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
- 4.No more than once.