


Features

- OUTSTANDING MATERIAL EFFICIENCY.
- RELIABLE AND RUGGED.
- WATER CLEAR LENS.
- LOW POWER CONSUMPTION.
- ONE BLUE, ONE ORANGE AND ONE GREEN CHIPS IN ONE PACKAGE.
- CAN PRODUCE ANY COLOR IN VISIBLE SPECTRUM, INCLUDING WHITE LIGHT.
- RoHS COMPLIANT.



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES

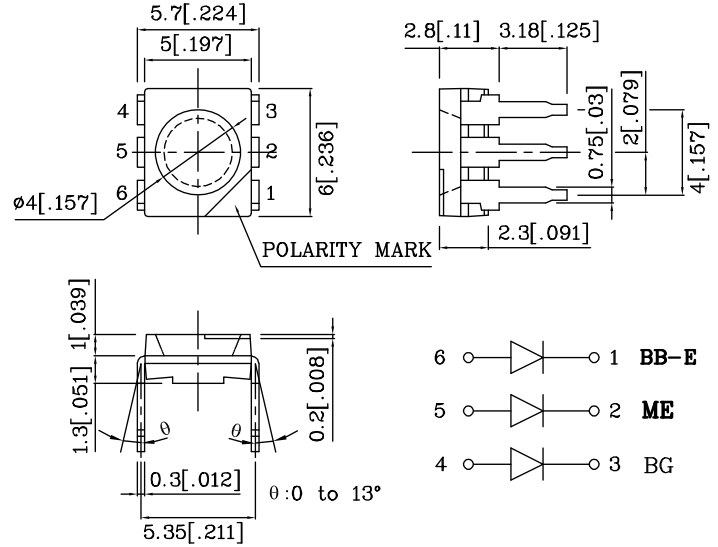


Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.

Absolute maximum ratings (TA=25°C)		BB-E (InGaN)	ME (InGaAlP)	BG (InGaN)	Unit
Reverse Voltage	VR	5	5	5	V
Forward Current	IF	30	50	30	mA
Forward Current (peak) 1/10Duty Cycle 0.1ms Pulse Width	iFS	160	195	150	mA
Total Power Dissipation Within 350mW At All Chips Are Lightened	PT	350			mW
Operating Temperature	TA	-40 ~ +85			°C
Storage Temperature	Tstg	-40 ~ +85			
Lead Solder Temperature [2mm Below Package Base]	260°C For 3 Seconds				
Lead Solder Temperature [5mm Below Package Base]	260°C For 5 Seconds				






Operating Characteristics (TA=25°C)		BB-E (InGaN)	ME (InGaAlP)	BG (InGaN)	Unit
Forward Voltage (typ.) (IF=20mA)	VF	3.7	2.0	3.5	V
Forward Voltage (max.) (IF=20mA)	VF	4.3	2.5	4.5	V
Reverse Current (VR=5V)	IR	10	10	10	uA
Wavelength of Peak Emission (IF=20mA)	λP	465	630	520	nm
Wavelength of Dominant Emission (IF=20mA)	λD	470	621	525	nm
Spectral Line Full Width At Half-Maximum (IF=20mA)	$\Delta\lambda$	25	20	38	nm
Capacitance (VF=0V, f=1MHz)	C	110	25	45	pF

Part Number	Emitting Color	Emitting Material	Lens-color	Luminous Intensity (IF=30mA *50mA) mcd		Wavelength nm λP	Viewing Angle 2 θ 1/2
				min.	typ.		
XSBBEMEBG99W	Blue	InGaN	Water Clear	110	248	465	100°
	Orange	InGaAlP		*650	*995	630	
	Green	InGaN		180	347	520	





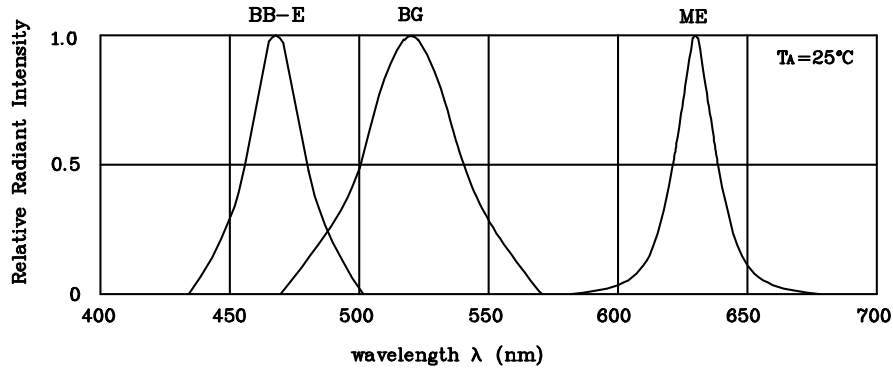


RELATIVE INTENSITY Vs. WAVELENGTH






❖ BB-E

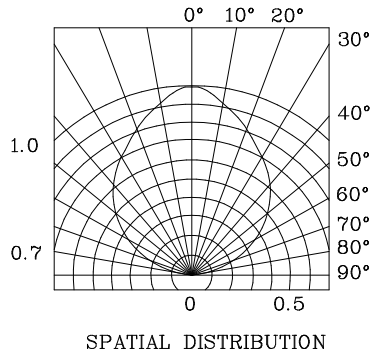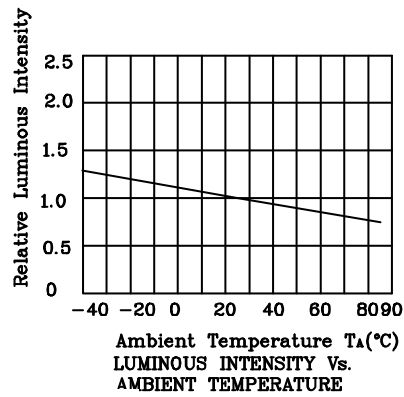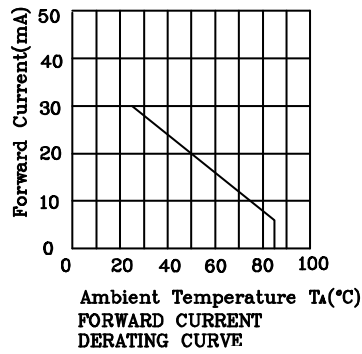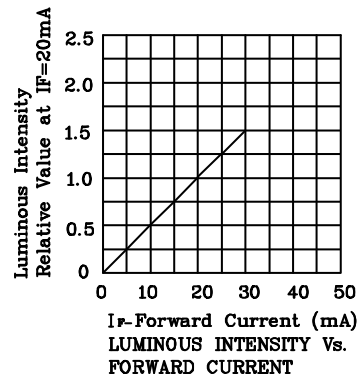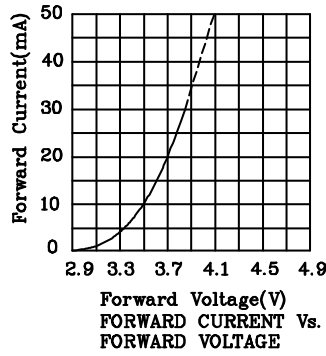

❖ ME

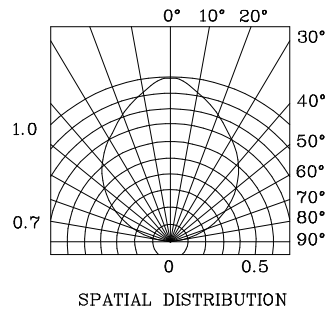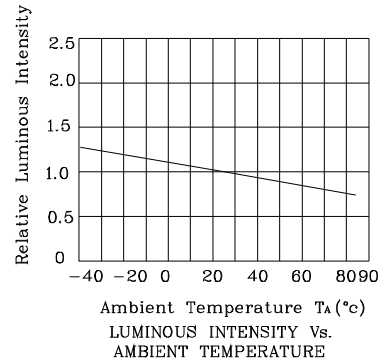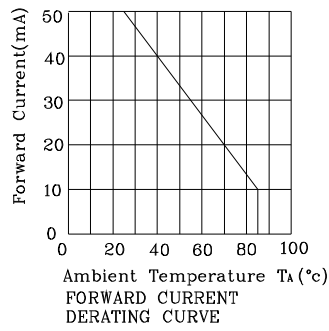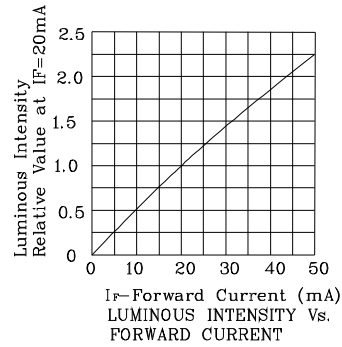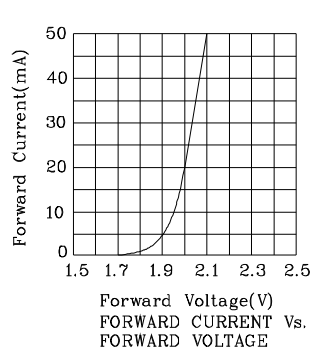

❖ BG

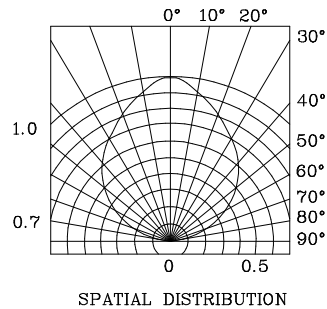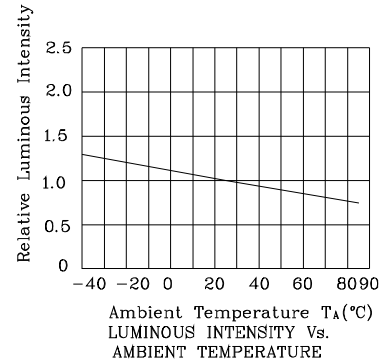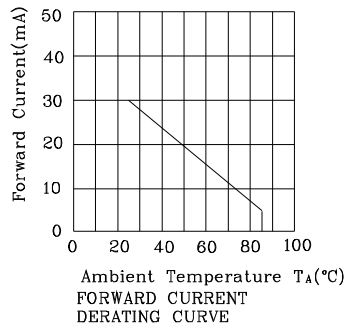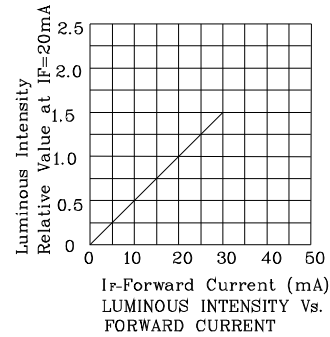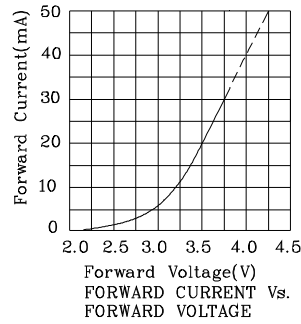

Remarks:

If special sorting is required (e.g. binning based on forward voltage, luminous intensity, or wavelength), the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm
2. Luminous Intensity: +/-15%
3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.