



Main

| | |
|---------------------------|--------------------------------------|
| Range of product | Harmony XVB Universal |
| Product or component type | Base unit |
| Component name | XVBC |
| Indicator bank base type | Standard |
| Material | Glass reinforced polyamide base unit |

Complementary

| | |
|-------------------------------|--|
| Fixing mode | Direct or tube fixing |
| Mounting diameter | 70 mm |
| Product destination | Banks without flash discharge tube unit |
| Cable entry | Bottom or side entry |
| Assembly style | Customer assembly, up to 5 units |
| Terminals description ISO n°1 | (COM-5)PW (COM-2)PW (COM-1)PW (COM-3)PW (GND)GROUND (COM-4)PW |
| Product weight | 0.16 kg |

Environment

| | |
|-------------------------------------|--|
| Product certifications | GOST CSA C22-2 No 14 CCC UL 508 |
| Standards | EN/IEC 60947-5-1 |
| Protective treatment | TC |
| Ambient air temperature for storage | -40...70 °C |
| NEMA degree of protection | NEMA 4X indoor UL 508 |


Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Indicator Bank with “Flash” Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

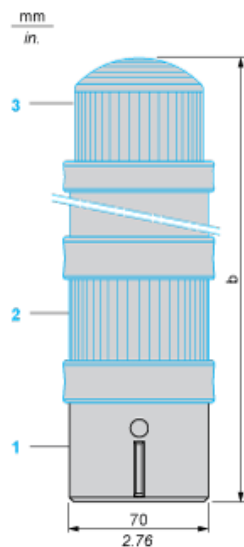


- (1) Base unit
- (2) Illuminated or audible signalling unit XVBC•••, to be ordered separately
- (3) “Flash” unit XVBC•••, to be ordered separately

| Number of illuminated or audible signalling units other than “flash” tube | b in mm | b in in. |
|---|---------|----------|
| 1 | 295 | 11.61 |
| 2 | 358 | 14.09 |
| 3 | 421 | 16.57 |
| 4 | 484 | 19.06 |

Base Unit for Indicator Banks

Panel Cut-out for Direct Fixing



Illuminated Beacon

Wiring Diagram

