

(2.00 mm) .0787"

YTS, YMQ SERIES

HIGH-DENSITY SOCKET STRIP

SPECIFICATIONS

For complete specifications see www.samtec.com?YTS or www.samtec.com?YMQ

Insulator Material:
Black Liquid Crystal Polymer

Contact Material:
Phosphor Bronze

Operating Temp Range:
-55 °C to +125 °C

Plating:
Sn or Au over
50 μm (1.27 μm) Ni

Insertion Depth:
(2.62 mm) .103" to
(5.03 mm) .198"

Max Cycles:
100 with 10 μm (0.25 μm) Au

RoHS Compliant:
Yes

Mates with:
YTT, YTW, YTE, TMMS



Choice of four,
five or six row

(2.00 mm)
.0787" pitch

(6.35 mm)
.250"


(2.00 mm)
.0787" TYP

PROCESSING

YTS Lead-Free Solderable:
Wave Only
YMQ Lead-Free Solderable:
Wave or reflow with
Matte Sn plating

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality

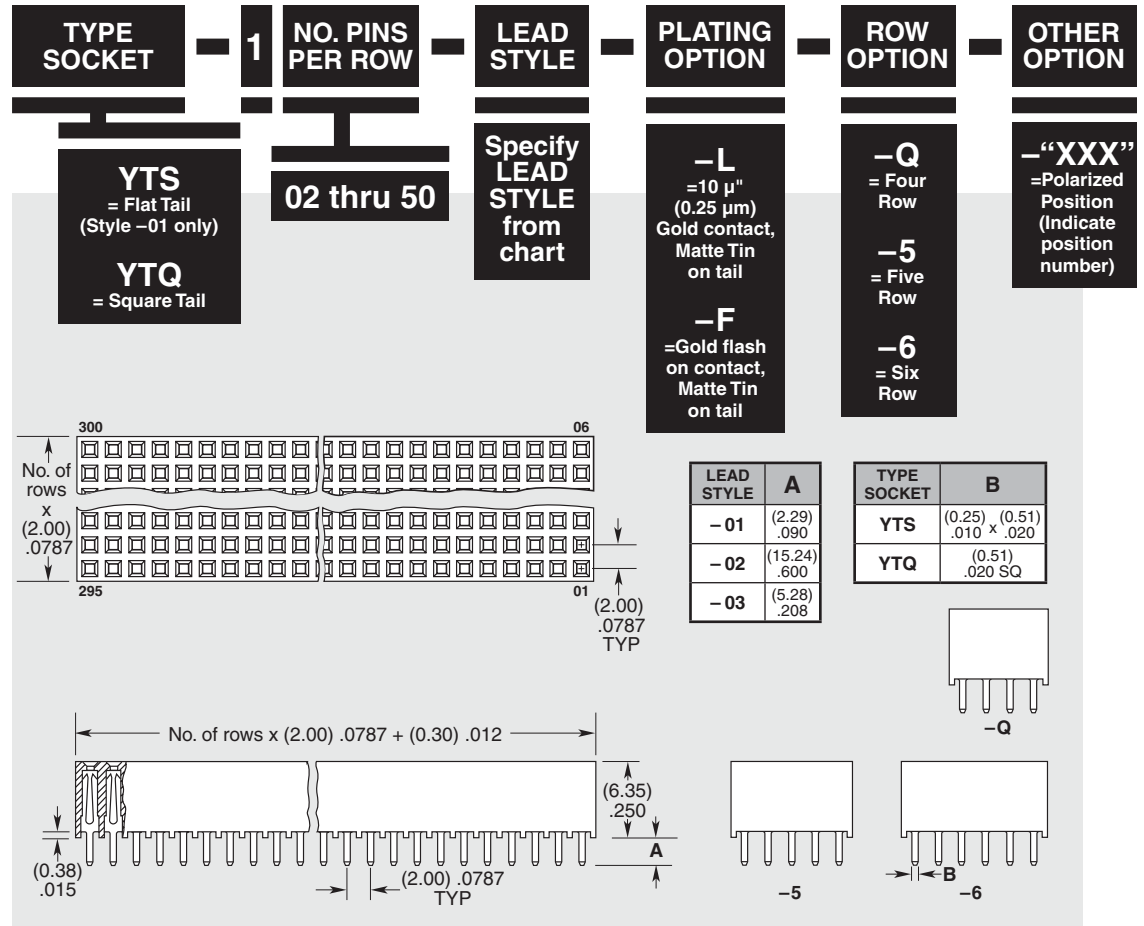

Note:
Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.
Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.