ZRB15XR61A475ME01#

"#" indicates a package specification code.













 0.65 ± 0.15 mm


0.1 to 0.4mm

0.3mm min.

0402 (1005)

< List of part numbers with package codes > $ZRB15XR61A475ME01D \ , \ ZRB15XR61A475ME01J$

Shape

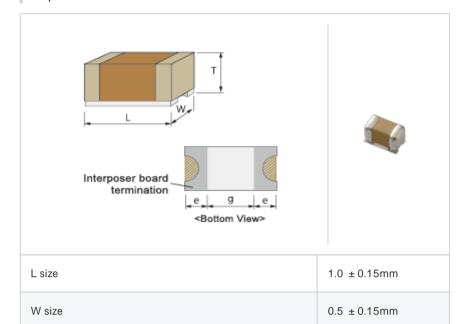

N	ot	e	S
1 4	υı	C	J

Volt. & temp. derating recommended product

References

Packaging	Specifications	Minimum quantity	
D	180mm Paper taping	8000	
J	330mm Paper taping	30000	

Mass (typ.)				
1 piece	1.9mg			

Specifications

External terminal width e

Size code in inch(mm)

Distance between external terminals g

T size

Capacitance	4.7µF ± 20%
Rated voltage	10Vdc
Temperature characteristics (complied standard)	X5R(EIA)
Capacitance change rate	± 15.0%
Temperature range of temperature characteristics	-55 to 85
Operating temperature range	-55 to 85

1 of 1

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Murata Manufacturing Co., Ltd.

URL: http://www.murata.co.jp/

Last updated: 2015/02/07