

4mm Male Banana Plug to 4mm Female Banana Plug Lead



**RoHS
Compliant**




Applications

To extend to 4mm banana jacks, sockets and binding posts. Very low voltage general purpose electric testing, controlling and measuring.

Characteristics

Electrical Safety	: Very low voltages only: 33V AC / 70V DC, Up to 36A (at +40°C)
Operating Temperature	: -20°C to +80°C
Materials	: Conductors: Nickel-coated brass and red annealed copper. Wire jackets: PVC. Insulators and lantern contact spring
Colour	: Black and Red
Length	: 25cm (0.25 meters), 50cm (0.5 meters) & 100cm (1 meters).

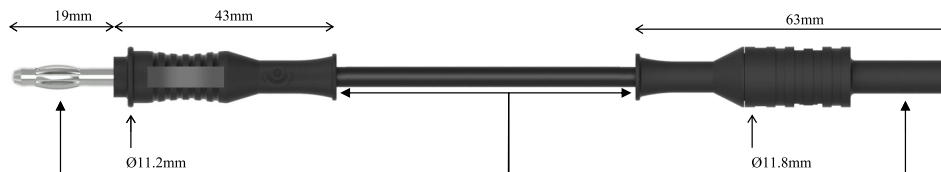

The 4 mm banana male connection complies with the 4 mm banana sockets, meet the requirements of interchangeability dimensions of the standard NF C 93-440:1986.

The design and the material of the lantern contact springs meet the need of low resistance and reliability.

The wire attachments comply with heavy duty. Double jacket wire to offer a wire wear indicator. Cross section area 0.75 mm². Lengths 25 cm, 50 cm, and 100 cm (visible length of the wire, not the overall length of the lead).

The 4 mm banana female connection complies with the 4 mm banana plugs, meet the requirements of interchangeability dimensions of the standard NF C 93-440:1986.

Part Number Table

Description	Colour	Length	Part Number
Straight 4mm Male Banana Plug to Straight 4mm Female Banana Plug Lead	Black	0.25m	76-098
	Red		76-099
	Black	0.5m	76-100
	Red		76-101
	Black	1m	76-116
	Red		76-118

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Tenma is the registered trademark of the Group. © Premier Farnell Limited 2016.

