Description

Magnecraft[™] General Purpose Relays

783 Series 3PDT 15 A



UL listed when used with proper Magnecraft[™] sockets





783 Clear Cover


783 Full-Feature Cover


Description

The 783 Series plug-in relays offer clear or full-feature covers with multiple mounting options and accessories.

Feature	Benefit
15 A max. switching current	Ideal for automation panels & controls
Clear or full-feature cover options	Full-feature covers include LED indicator & locking test button
3PDT contact configuration	Simultaneously control up to 3 separate circuits
Socket mount option	Simplifies installation & maintenance while also allowing the use of protection modules, hold-down clips & other accessories
Gold-flashed contacts	Reduces contact oxidation & increases shelf life
Mechanical flag indicator	Standard feature displays relay status during testing or operation

Contact Rating	Contact Configuration	Nominal Voltage	Coil Resistance (Ω)	Standard Part Number: Clear Cover	Standard Part Number: Full-Feature
15 A	3PDT	24 Vac 50/60 Hz	103	783XCXC-24A	783XCXM4L-24A
		120 Vac 50/60 Hz	2770	-	783XCXM4L-120A
		12 Vdc	100	783XCXC-12D	783XCXM4L-12D
		24 Vdc	400	783XCXC-24D	783XCXM4L-24D
		110/125 Vdc	8600	783XCXC-110D	-



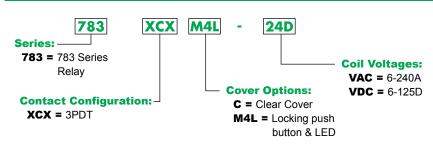

*Please note that LED-only versions are also available. Please contact Customer Service for more information (847-441-2540).



Magnecraft[™] General Purpose Relays

783 Series 3PDT 15 A

Specifications (UL 508)

Part Number	783XCX		
Contact Characteristics			
Terminal Style Blade			
Contact Configuration	3PDT		
Maximum Current	15 A		
Contact Materials	Silver Alloy		
Maximum Switching Voltage	300 V		
Rated Switching Current at Voltage	Resistive: 12 A at 277 Vac 50/60 Hz; 15 A at 120 Vac 50/60 Hz; 12 A at 28 Vd Motor: 1/2 hp at 120 Vac 50/60 Hz; 3/4 hp at 250 Vac 50/60 Hz Pilot Duty: B300		
Minimum Switching Requirement	100 mA at 5 Vdc (0.5 W)		
Coil Characteristics			
Maximum Operating Voltage	110% (AC / DC)		
Maximum Pickup Voltage	85% (AC); 80% (DC)		
Drop-out Voltage Threshold	15% (AC); 10% (DC)		
Average Consumption	1.5 VA (AC); 1.4 W (DC)		
General Characteristics			
Electrical Life at Rated Load	200,000 operations		
Mechanical Life (Unpowered)	10,000,000 operations		
Operating Time (Response Time)	20 ms		
Dielectric Strength - Between Coil and Contact (AC)	2500 V(rms)		
Dielectric Strength - Between Poles (AC)	2500 V(rms)		
Ambient Air Temperature around the Device - Storage	-40 - +85 °C (-40 - +185 °F)		
Ambient Air Temperature around the Device - Operation	-40 - +55 °C (-40 - +131 °F)		
Vibration Resistance - Operational	3 g-n at 10-55 Hz		
Shock Resistance	10 g-n		
Degree of Protection	IP 40		
Weight	60 g (2.12 oz)		
Agency Approvals	UL with socket, UR (E43641), CE, CSA (LR40787), RoHS		


Note: Actual product performance may vary depending on application and environmental conditions.

Magnecraft[™] General Purpose Relays


783 Series 3PDT 15 A


Dimensions — inches (millimeters)

Clear Cover Dimensions

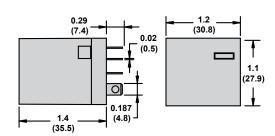


Full-Feature Cover Dimensions

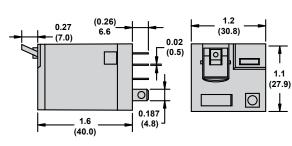



Wiring Diagram

3PDT



Description, Specifications

Magnecraft[™] General Purpose Relays

783 Series Accessories



Description

Optional sockets offer customizable, finger-safe™ solutions including protection modules, hold-down clips, and ID tags. Sockets are DIN rail and panel mount compatible.

Relay Accessories

Description	Function	For Use With Relays	Pkg. Min.	Standard Part Number
Socket 1	Finger-safe, DIN/Panel mount with screw terminals and clamping plates		10	70-783D11-1A
Adapter 2	Mount directly to DIN rail	783	10	16-783C
Adapter 3	Mount directly to panel		10	16-783C1





Socket Accessories

Description	Function	For Use With Sockets	Coil Voltage	Pkg. Min.	Standard Part Number
Metal Spring Clip	Secures relay in socket		-	10	16-783SC
Plastic ID Hold-Down Clip @	Secures relay in socket and provides labeling	70-783D11-1A	-	10	16-783IDC
Extruded Aluminum DIN Rail, 39.37'' (1000 mm) 3	Quick installation and removal of sockets		-	10	16-700DIN
DIN Rail End Clip 🕄	Holds sockets firmly in place on DIN rail	-	-	10	16-DCLIP-1
Large Socket Module	MOV Suppressor (Protects from damaging electrical spikes)		24 Vac/Vdc	10	70-ASMM-24
Large Socket Module	Protection Diode (Protects external drive circuitry from inductive voltages)	70-783D11-1A	120 Vac/Vdc	10	70-ASMD-250
Large Socket Module	LED Indicator (<i>Provides coil status at a glance</i>)		110/240 Vac/Vdc	10	70-ASMLG-110/240
Large Socket Module	RC Suppressor (Snubs back EMF of relay coil)		110/240 Vac/Vdc	10	70-ASMR-110/240

Note: Use of LED or RC socket module may increase coil power draw by up to 10%.