

## 6 Mounting Hardware for SEMIPACK® Modules

For SEMIPACK 1,2,3,4 there are complete kits available:

Hardware needed for one SEMIPACK®	SEMIPACK®1 a) SKKD/E 26...100 b) SKKT/H/L 20...106	SEMIPACK®2 SKKT/H 122...162 SKKD/E 162, SKKD 212	SEMIPACK®3 SKKT/H/L 213...330 SKKD/E 260,380	SEMIPACK®4 SKET 330, 400 SKKE 400
Gate female plug Insulating sleeve Double plug caps Baseplate screws Terminal screws Washers Spring washers	b: 2 pcs. 2,8 × 0,8 mm <sup>1)</sup> b: 4 pcs. 2 pcs. M5 × 18 socket head 3 pcs. M5 × 10 pozidrive head captive captive	4 pcs. 2,8 × 0,8 mm <sup>1)</sup> - 2 pcs. (right+left) 2 pcs. M5 × 18 socket head 3 pcs. M6 × 12 pozidrive head (3 pcs. 6,4 mm $\varnothing$ ) (3 pcs. 6,4 mm $\varnothing$ )	4 4 pcs. 2,8 × 0,8 mm <sup>1)</sup> - 2 pcs. (right+left) 4 pcs. M5 × 18 <sup>2)</sup> socket head 3 pcs. M8 × 16, hexagon head captive captive	2 pcs. 2,8 × 0,8 mm <sup>1)</sup> - 1 pcs. (right) 4 pcs. M5 × 18 <sup>2)</sup> socket head 2 pcs. M10 × 50 <sup>1)</sup> 2 pcs. 10,5 mm $\varnothing$
Part No. of the complete kit	for 12 SEMIPACKs a: 33704200 b: 33403900	for 8 SEMIPACKs 33404000	for 3 SEMIPACKs 33404100	for 3 SEMIPACKs 33404500

Fig.6-1 Mounting hardware for SEMIPACK modules

<sup>1)</sup> Spindle No. 30143660 with 2 nuts M 10

<sup>2)</sup> For SEMIPACK 3 with 10 mm thick base plates and SEMIPACK 4 on heat sink P3, use M5×20(No. 30145490), available on request

All accessories can also be ordered separately,

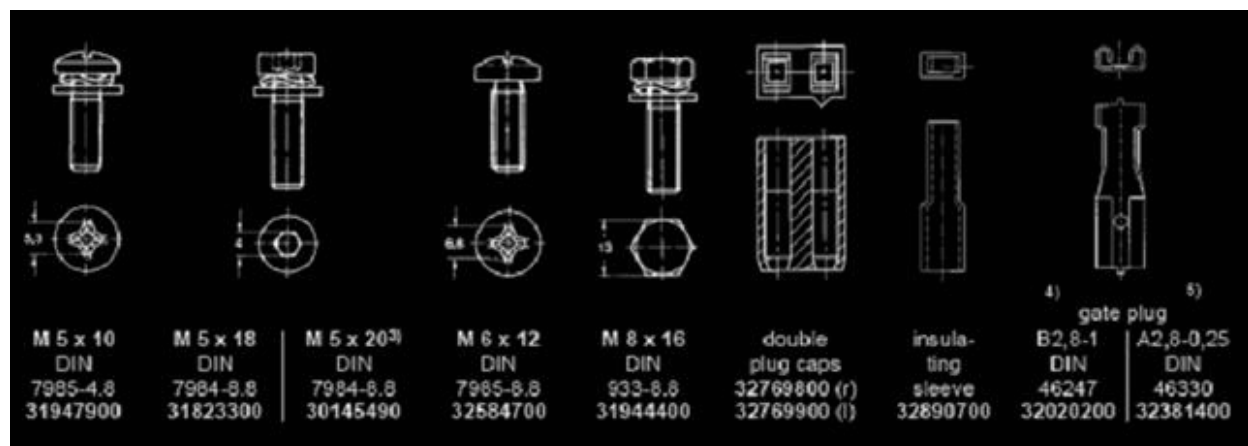


Fig.6-2 Mounting screws for SEMIPACK Modules

Two different double plug caps are available, 32769800(r) has a right nose and 32769900(l) has a left nose. 32769800(r) is used for terminals 4 and 5 of SEMIPACK 2,3,4,5; 32769900(l) is used for terminals 6 and 7 of SEMIPACK 2,3,5 and SEMIPACK 6.