



- HVDC 600A at 800VDC.
- Max. Switching current = 3300A.
- AgSnO₂ contacts sealed in inert gas.
- Magnet arc blowout.
- Coil economizer as standard.
- Auxiliary contact option.
- Male or Female power terminals.



Contacts

Contact arrangement	SPST-NO-DM	
Contact material	AgSnO ₂	
Max switching voltage	AC/DC	900VDC
Rated load (resistive, cos φ=1)	DC1	600A 800VDC
Max continuous thermal current	600 secs	700A
	60 secs	1000A
	20 secs	1500A
Max switching current	1 time only	3300A 320VDC
Initial contact resistance	max	0.2mΩ
Auxiliary Contact (when fitted)	Arrangement	SPST-NO (1 Form A)
	Max. Current	2A @ 30VDC / 3A @ 125VAC
	Min. Current	100mA @ 8V

Coil

Rated Voltage (see page 2)	DC	12 ...36VDC (with Coil Economizer)
Rated power consumption	hold	1.7W @ 12VDC

Insulation

Insulation resistance	Initial	100MΩ (Min.)
	Life End	50MΩ (Min.)
Dielectric strength	coil to contact	2500Vrms / 1mA / 1 min (at sea level)
	contact to contact	2500Vrms / 1mA / 1 min (at sea level)

General Data

Operate / bounce time at 20°C	max	40ms / 5ms
Release time	max	20ms
Electrical life	Voltage and Current Dependent - See Fig. 1	
Mechanical life	Refer to Fig. 1	
Ambient temperature	operating	-40 to +85°C
Relative humidity	5 to 85%RH	
Shock resistance	20G peak, 11ms 1/2 sine	
Vibration resistance	20G sine peak (80 to 2000Hz)	
Dimensions	L x W x H	78 x 67 x 104.5mm (approx.)
Weight	approx.	800g

Ordering Code

DEVR60 - 50 61 - S8 - 1236 - R 1

Series

Contact Material

50: AgSnO₂

Contact Arrangement

61: SPST-NO

71: SPST-NO + Auxiliary

Mounting & Connections

Bottom flange mounting base

S8: M10 male stud power terminals

S9: M8 female power terminals

Coil & auxiliary contacts by flying leads

Coil Code

See coil codes - Table 1

Coil Wire Length

R: 14.96" (380mm)

T: 5.9" (150mm)

Coil Wire & Auxiliary Contact Termination

1: None

2: Yazaki 7282-5558-10 Male

3: Molex Mini-Fit Female

Other terminations to special order

DEVR60 series

HVDC contactor 600A / 800VDC



Coil Data


Table 1

Coil code	Nominal voltage (VDC)	Must operate voltage Max. (VDC)	Maximum allowable voltage (VDC)	Must release voltage min. (VDC)	Inrush Current Max. (A)	Hold Voltage Min. (VDC)	Holding Current (Average)
1236	12 - 36	9	36	6	2.32	7.5	100mA@12VDC 50mA @ 24VDC

Other coils available upon special request.


Electrical Performance

Fig 1.

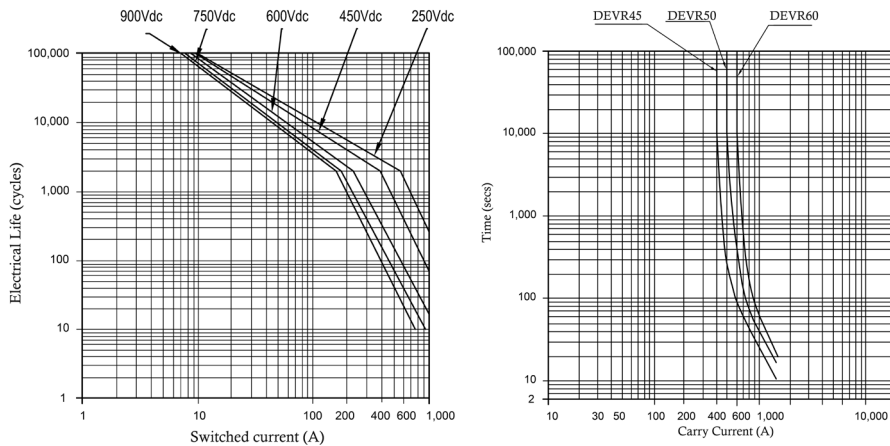

Circuit Diagram


Fig 2.

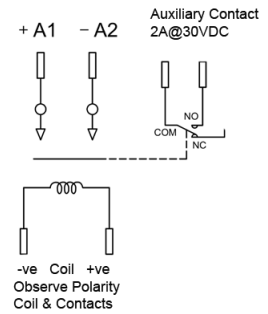

Shown with optional auxiliary contact

Dimensions (mm)

Fig 3.

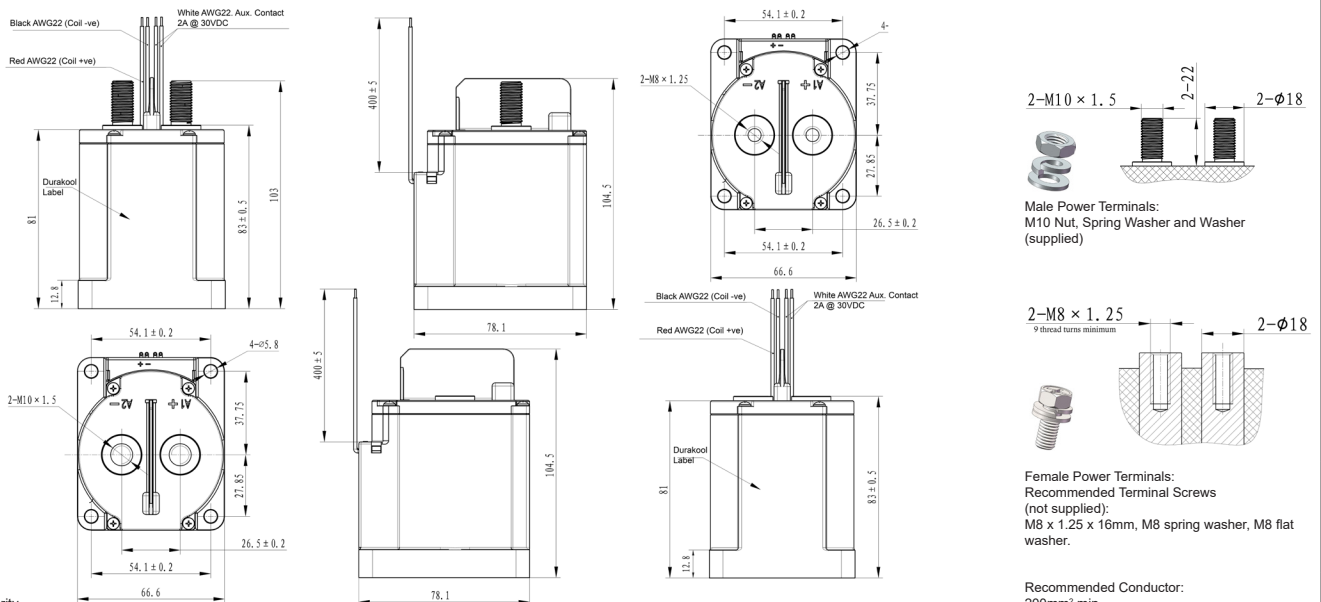

Male Power Terminals:
M10 Nut, Spring Washer and Washer (supplied)

Female Power Terminals:
Recommended Terminal Screws (not supplied):
M8 x 1.25 x 16mm, M8 spring washer, M8 flat washer.

Recommended Conductor:
200mm² min.
Torque settings:
Terminals: 9.0-12.0Nm
Base Mounting: 1.8 to 3.8Nm

- Notes:
- Note coil polarity
 - Polarity sensitive type: Observe contact polarity as indicated. Contactor life will be severely reduced if incorrectly connected.
 - Nominal dimensions in mm.
 - Tolerances (nominal), <10mm: ± 0.3mm, 10 ~ 50mm: ± 0.6mm, >50mm: ± 1.0mm.
 - Coil wire length and terminations can be customized upon request.



Specifications are liable to change without notice. E&OE.