

Type FXG Subminiature Fast Acting Fuse



www.optifuse.com (619) 593-5050

Agency Standards and Listings:



Time Characteristics:

100%	4h	Min.
200%	20s	Max.

Interrupt Rating:

375mA~3A	50A at 250VAC
100mA~350mA	30A at 250VAC
3.15A~10A	30A at 250VAC
12A-15A	30A at 72VAC
20A	50A at 60VAC


Packaging in Bulk:

No suffix - ammo pack - 4000 pcs
TR suffix - Tape & Reel - 4000 pcs, EIA-296

Part number:

FXG-XX – Ammo pack
FXG-XX-TR – Tape and Reel

Mechanical Dimensions: Inches[mm]

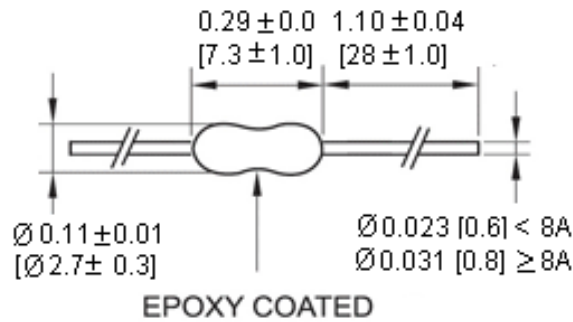

Part Number	Amperage	Agency Approval			I ² T Reference A ² Sec.	Rated Voltage (VAC)
		UL(CUL)	UR(CUR)	CSA		
FXG-100mA	100mA					250V
FXG-125mA	125mA		•	•	0.000949	
FXG-160mA	160mA		•	•	0.002313	
FXG-200mA	200mA		•	•	0.002719	
FXG-250mA	250mA		•	•	0.005643	
FXG-300mA	300mA		•	•	0.008507	
FXG-315mA	315mA		•	•	0.009699	
FXG-375mA	375mA	•		•	0.01937	
FXG-400mA	400mA	•		•	0.01841	
FXG-500mA	500mA	•		•	0.03792	
FXG-600mA	600mA	•		•	0.03965	
FXG-630mA	630mA	•		•	0.04021	
FXG-700mA	700mA	•		•	0.07328	
FXG-750mA	750mA	•		•	0.08122	
FXG-800mA	800mA	•		•	0.1002	
FXG-1A	1A	•		•	0.4457	
FXG-1.2A	1.2A	•		•	0.2627	
FXG-1.25A	1.25A	•		•	0.3341	
FXG-1.5A	1.5A	•		•	0.5409	
FXG-1.6A	1.6A	•		•	0.5568	
FXG-2A	2A	•		•	1.038	
FXG-2.25A	2.25A	•		•	1.076	
FXG-2.5A	2.5A	•		•	1.899	
FXG-3A	3A	•		•	2.851	
FXG-3.15A	3.15A		•	•	2.049	
FXG-3.5A	3.5A		•	•	2.704	
FXG-4A	4A		•	•	3.666	
FXG-5A	5A		•	•	6.102	
FXG-6A	6A		•	•	6.802	
FXG-6.3A	6.3A		•	•	8.075	
FXG-7A	7A		•	•	10.18	
FXG-8A	8A		•	•	16.21	
FXG-9A	9A		•	•	18.77	
FXG-10A	10A		•	•	25.54	
FXG-12A	12A		•	•	50.89	
FXG-15A	15A		•	•	68.28	
FXG-20A	20A		•		147.1	
						72V
						60V

• for Approved

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of Fuse device with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev E 08/2015 - Page: 1/2
Code: H01-01H


Type FXG Subminiature Fast Acting Fuse



www.optifuse.com

(619) 593-5050

Time Current Curve Graph

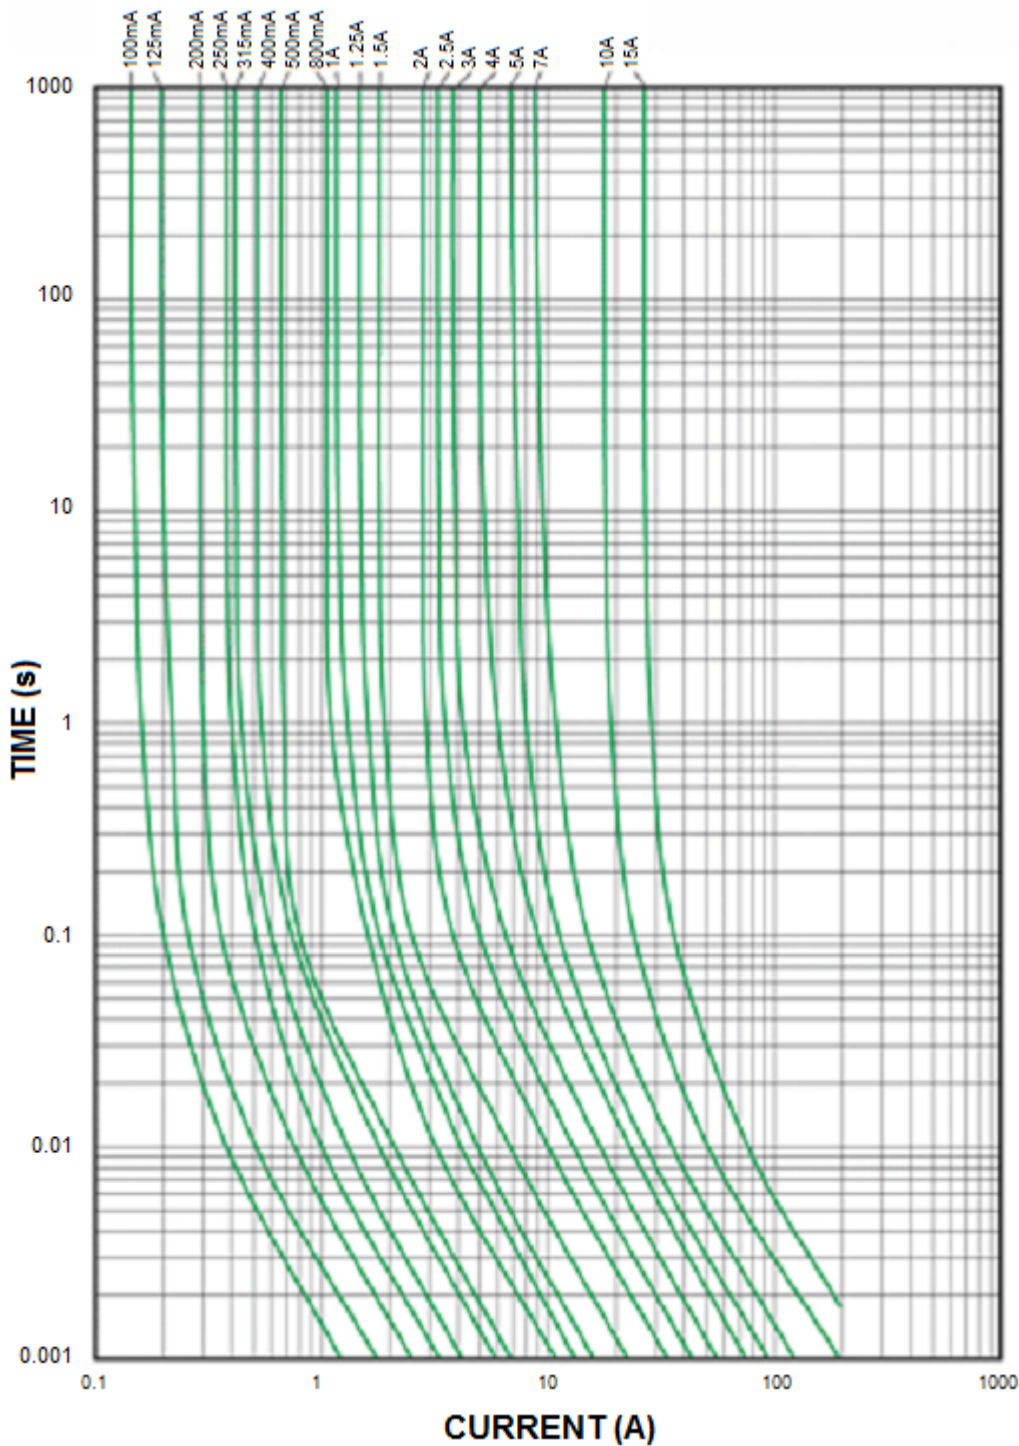

Note: All specifications subject to change without notice.

Rev E 08/2015 - Page: 2/2
Code: H01-01H