



#### ■ Features :

- \* Charger for lead-acid batteries (flooded, Gel and AGM) and Li-ion batteries (lithium iron and lithium manganese) (Note.1)
- 2 stage charging characteristic
- Universal AC input / Full range
- \* Built-in active PFC function, PF>0.97
- No load power consumption<0.5W
- \* 3 pole AC inlet IEC320-C14
- Class I power ( with earth pin)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- \* Cooling by free air convection
- Fully enclosed plastic case
- \* 2 color LED indicator for charging status
- \* Approvals: TUV / UL / PSE / CB / FCC / CE
- 2 years warranty












ORDER NO.	OUTPUT CONNECTOR	SAFETY
GC120Axx-R7B (standard model)	4pin power din	TUV / CB / FCC / CE
GC120Axx-AD1 (optional model)	Anderson connector	UL/TUV/CB/FCC/CE
GC120Axx-□ xx=12,24,48; □=R7B,AD1		

### **SPECIFICATION**

ORDER NO.		GC120A12-	GC120A24-	GC120A48-		
	SAFETY MODEL NO.	GC120A12	GC120A24	GC120A48		
OUTPUT	DC VOLTAGE (Typ.)	13.6V	27.2V	54.4V		
	RECOMMENDED BATTERY CAPACITY Note.3	40 ~ 100Ah	20 ~ 65Ah	10 ~ 35Ah		
	CONTINUOS OUTPUT CURRENT (Typ.)	7.5A	4.42A	2.21A		
	RATED POWER	102W	120.2W	120.2W		
	LED INDICATOR	Charging(CC): RED Floating charging(CV): GREEN				
	VOLTAGE RANGE Note.4	85 ~ 264VAC 120 ~ 370VDC				
	FREQUENCY RANGE	47 ~ 63Hz				
	POWER FACTOR (Typ.)	PF>0.97 / 230VAC PF>0.99 / 115VAC at full load				
INPUT	EFFICIENCY (Typ.)	86.5%	90%	91%		
	AC CURRENT	1.4A / 115VAC 0.7A / 230VAC				
	INRUSH CURRENT (max.)	70A / 230VAC				
	LEAKAGE CURRENT(max.)	0.75mA / 240VAC				
OVERL	OVERLOAD Note.5	90 ~ 110% rated output power  Protection type: Constant current limiting recovers automatically after fault condition is removed				
	SHORT CIRCUIT	Protection type: Hiccup mode, recovers automatically after fault condition is removed				
PROTECTION	OVER VOLTAGE	14 ~ 16.5V	29 ~ 33V	59 ~ 69V		
		Protection type: Shut down o/p voltage, re-power on to recover				
	OVER TEMPERATURE	100 °C ± 10 °C (RTH2) detect on inside ambient temperature				
OVERT	OVER TEMPERATURE	Protection type: Shut down o/p voltage, r	ower on to recover			
	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")				
	WORKING HUMIDITY	20% ~ 90% RH non-condensing				
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH				
	TEMP. COEFFICIENT	±0.03% / °C (0~50°C)				
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes				
SAFETY & WITHST	SAFETY STANDARDS	UL1012 (FOR GC120AXX-AD1 Only, TUV EN60950-1, PSE J60950-1 approved				
	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC				
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH				
(Note. 6)	EMC EMISSION	Compliance to EN55032 class B, FCC PART 15 class B / CISPR32 class B, EN61000-3-2,3				
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, light industry level, criteria A				
OTHERS	MTBF	400.7Khrs min. MIL-HDBK-217F(25°C)				
	DIMENSION	167*67*35mm (L*W*H)				
	PACKING	0.62Kg; 20pcs/13.4Kg/0.9CUFT				
CONNECTOR	PLUG	See page 2; Other type available by customer requested				
CONNECTOR	CABLE	See page 2; Other type available by customer requested				
NOTE	All parameters NOT specia     This is MeanWell's suggest     Derating may be needed up	ecification may be required for different battery specification. Please contact battery vendor and MEAN WELL for details. ally mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. Ited range, please consult your battery manufacturer for their suggestions about maximum charging current limitation. Inder low input voltage. Please check the derating curve for more details.  region is within 50~100% rated output voltage.				


- 6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.



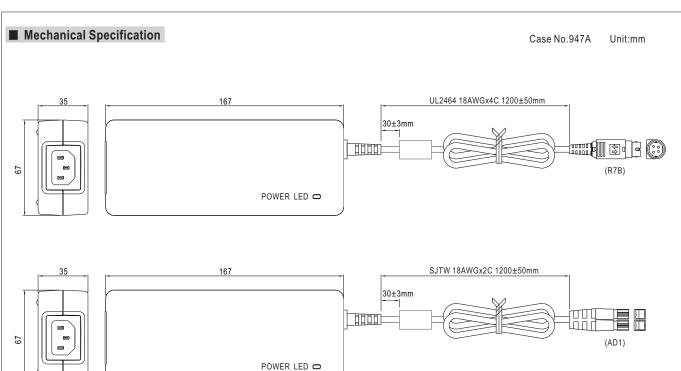

# ■ Plug Assignment

### DC output connector (standard)




-V connected to AC FG

#### DC output connector (optional)

	\ I	,
	AD1	
[ housing: Anderson 1327FP(red), 1327G6FP(black)		
contacts: Ande	rson 261G2 (4	I5A) or equivalent]
Re	ed(+V)	Black(-V)

## ■ Charging Curve

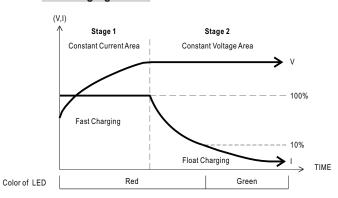

Model	Suggested Battery capacity	
GC120A12	40-100Ah	
GC120A24	20-65Ah	
GC120A48	10-35Ah	

Suitable for lead-acid batteries (flooded,Gel and AGM) and Li-ion batteries (lithium iron and lithium manganese)



