### 1.6X0.8mm SMD CHIP LED LAMP

Part Number: KPT-1608SYCK

Super Bright Yellow


#### Features

- 1.6mmX0.8mm SMT LED, 0.75mm thickness.
- Low power consumption.
- Wide viewing angle.
- Ideal for backlight and indicator.
- Various colors and lens types available.
- Package: 2000pcs / reel .
- Moisture sensitivity level : level 3.
- RoHS compliant.

#### Description

The Super Bright Yellow device is made with AlGaInP (on GaAs substrate) light emitting diode chip.

#### **Package Dimensions**

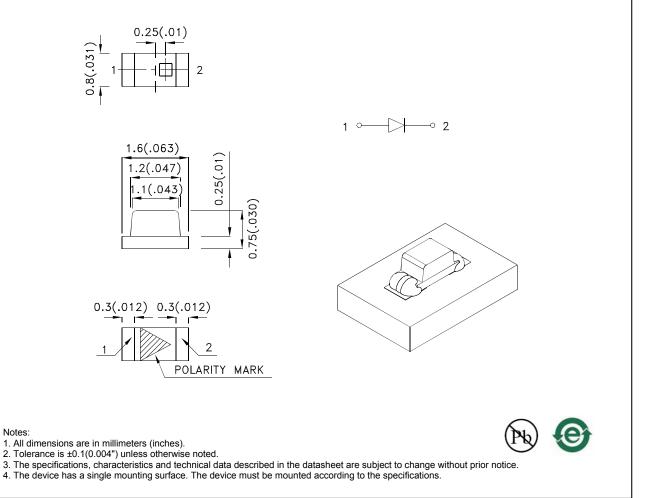

REV NO: V.18B CHECKED: Allen Liu DATE: DEC/22/2011 DRAWN: D.M.Su PAGE: 1 OF 5 ERP: 1203001771

#### Selection Guide

Part No.	Dice	Lens Type	lv (mcd) [2] @ 20mA		Viewing Angle [1]
			Min.	Тур.	201/2
KPT-1608SYCK	Super Bright Yellow (AlGaInP)	Water Clear	80	150	120°

Notes:

θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
Luminous intensity/ luminous Flux: +/-15%.
Luminous intensity value is traceable to the CIE127-2007 compliant national standards.

#### Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Super Bright Yellow	590		nm	I⊧=20mA
λD [1]	Dominant Wavelength	Super Bright Yellow	590		nm	I⊧=20mA
Δλ1/2	Spectral Line Half-width	Super Bright Yellow	20		nm	I⊧=20mA
С	Capacitance	Super Bright Yellow	20		pF	VF=0V;f=1MHz
Vf [2]	Forward Voltage	Super Bright Yellow	2	2.5	V	l⊧=20mA
IR	Reverse Current	Super Bright Yellow		10	uA	VR=5V


Notes: 1.Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V. 3. Wavelength value is traceable to the CIE127-2007 compliant national standards.

#### Absolute Maximum Ratings at TA=25°C

Parameter	Super Bright Yellow		
Power dissipation	75	mW	
DC Forward Current	30	mA	
Peak Forward Current [1]	175	mA	
Reverse Voltage	5	V	
Operating Temperature	-40°C To +85°C		
Storage Temperature	-40°C To +85°C		

Note:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

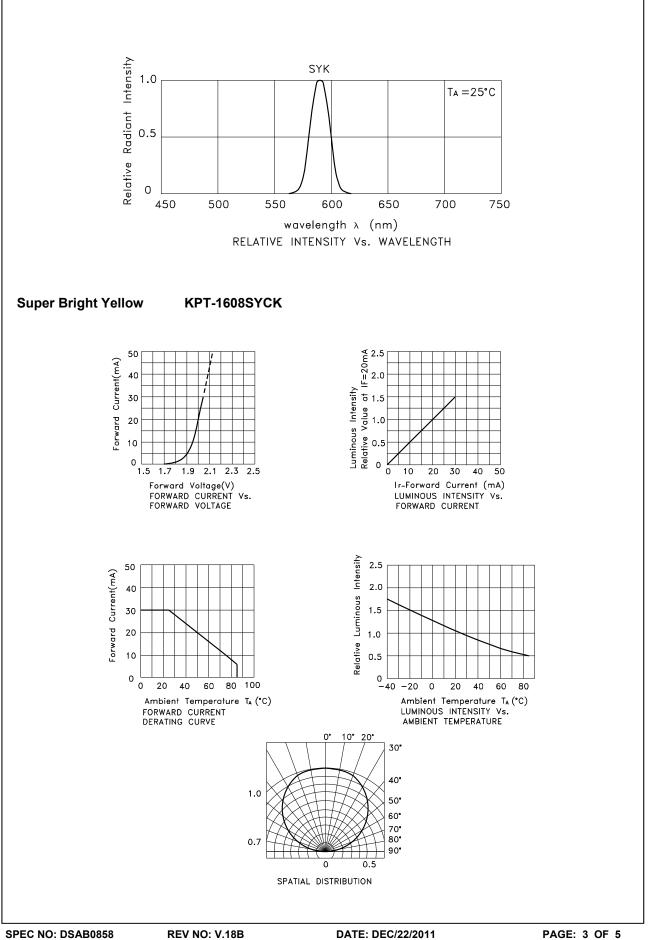

### KPT-1608SYCK

Reflow soldering is recommended and the soldering profile is shown below. Other soldering methods are not recommended as they might cause damage to the product.

