



# M20 Connectors

## Female Crimp Housing and Contacts


- ❖ Suitable for use with male connectors shown on pages 127 to 134.
- ❖ Twin-leaf phosphor bronze contacts supplied loose or on reels, rear insertable into housing.
- ❖ For Polarising Key use **order code M20-003**.
- ❖ Suitable for wire sizes 22 to 30 AWG.

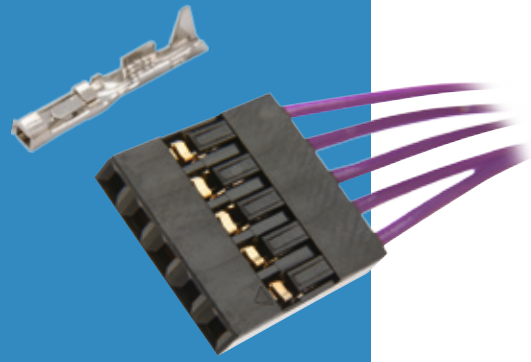

### SINGLE ROW

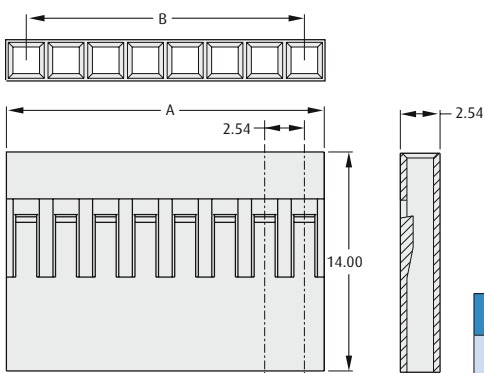


### DOUBLE ROW

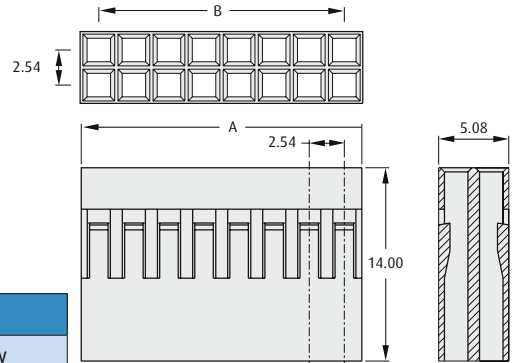

#### CALCULATION


<b>A</b>	2.54 x No. of contacts per row
<b>B</b>	2.54 x (No. of contacts per row - 1)

### CONTACTS



- ❖ Order codes for reeled contacts refer to one reel of 10,000 contacts.
- ❖ Order codes for loose contacts refer to one pack of 100 contacts.

#### WIRE STRIPPING DETAILS



### HAND CRIMP TOOL



#### ORDER CODE

Z20-320

- ❖ Instruction sheets available at [www.harwin.com/downloads/instructions](http://www.harwin.com/downloads/instructions)

### HOW TO ORDER

**M20 - 1 XX XX XX**

#### SERIES CODE

TYPE	
<b>06</b>	Single Row Housing
<b>07</b>	Double Row Housing
<b>16</b>	Reeled Contacts
<b>18</b>	Loose Contacts

#### NO. OF CONTACTS PER ROW

<b>00</b>	Contacts
<b>02 to 12</b>	Housings

#### FINISH

<b>00</b>	Housings	
<b>42</b>	Gold + Tin (Contacts)	
<b>46</b>	Tin (Contacts)	

All dimensions in mm.