

# Engineering Bulletin No RW25 Rotary Wafer Switches - Model MU-MA

General Information	on	2 versions, 3 and 60° inde	6° indexing - havin exing are variations	g 18 clip posit of the latter.C	tions a Option	ameter moulded wat and 30° indexing - ha al features include c mentary contact mod	aving 22 such positi oncentric shafts, pa	ons. 15°, 45°	
Characteristics.	Conta Curre Proof	ctrical, Maximum working voltage, ntact rating, Current carrying rent breaking with a resistive/non-reactive load. of Voltage. Ilation resistance.				300Vdc/ac (rms). 2amp continuous. 150mA at 250Vac (rms) 1000Vrms at sea level. Not less than 500 megohms at 500Vdc.			
	Mech	(between any 2 parts requirct resistance (initial).10 milliohms maximum at 1anical. $0,8 \pm 0,1$ Nm (114oz.in.)					at 100mV (rms). 100		
	Lind	stop strongen	Tempera	ature range.	0,0 _	o,11(m(11(02)m))	-40°C. to +10	)0°С.	
Maximum Switch	ing	No. of Poles.	36° MU-MA (b)	30° MU-MA	(a)	45° MU-MA (c)	60° MU-MA (d)	15° MU-MG	
Per Wafer	ľ		10 Positions.		- ()	12 Posi		2 wafers	
	Ī	1 Pole.	2 to 10 ways	2 to 12 wa	iys	2 to 8 ways	2 to 6 ways	providing 1 pole	
	ľ	2 Pole.	2 to 5 ways	2 to 7 way		(fixed stop at	2 to 6 ways	24 way	
		3 Pole.	2 to 4 ways	2 to 5 way	ys	positions 3, 5,	2 or 3 ways	switching.	
		4 Pole.	2 or 3 ways	2 to 4 way	ys	and 7 ways)	2 or 3 ways		
		5 Pole.	-	2 to 3 way	ys		2 ways only		
		6 Pole.	-	2 ways on	ly		on-off		
		7 Pole.	-	2 ways on	ly		-		
<ul> <li>The Type MU mechanism provides indexing angles of 30°, 36°, 45° and 60°, (see Bulletin RW36 for full technical details). The low friction moulded cam followers in the assembly ensures a smooth indexing action. Balance pressure springs provide consistent and readily reproducible total switch torque values within the following ranges.</li> <li>Light 7 to 18 x 10-<sup>2</sup> Nm(10 to 26 oz, ins,) Medium 14 to 32 x 10-<sup>2</sup> Nm (20 to 46 oz, ins,) High 28 to 56 x 10-<sup>2</sup> Nm (40 to 80 oz, ins,) Type A indexing mechanism may also be used as an alternative where a simpler, space saving mechanism is required. The switch then becomes model A-MA. 30° indexing only.</li> </ul>									
Contacts & Termination's.		Standard.Silver plated brass.Alternatives Hard gold plated or silver contacts are available at extra cost as are contacts with gold flash.Termination's Forward, standard: Straight, alternative.							
Rotor Blades.		Standard Shorting. (make before break. MBB.)Alternative Non-shorting. (break before make. BBM.)							
Insulation.		StatorMoulded glass fibre loaded diallylphthalate (DAP)RotorPolycarbonate.							
Finish.		Index Springs, Stainless steel: other metal parts, passivated zinc plated. Finishes to order.							
Mounting Details.		Imperial (standard). Bush 3/8" x 32TPI (Whit.) Shaft 0.25" dia. Nut 0.525" A/F.			Metric (alternative) M10 x 0.75. 6mm, dia. 14mm A/F.				




. Biased indexing is available giving momentary contact on positions 8 to 7, 5 to 4, 4 to 3, 3 to 2 and 2 to 1 as well as 3 position biased to centre.

- Concentric shafts dual concentric shafts and mechanisms for dual switching applications. (Not available for 36° indexing).
- 3. Insulated shafts.
- 4. Electrostatic shields.
- 5. Printed circuit termination's 2 types are available giving a variation in mounting height of the wafer above the P.C.board.
- 6. Adjustable stops 2 types are available.

Front - can be set without dismantling the switch and are available on models MU-MA (a),(d) and A-MA with imperial bush.

Rear - for use with all other indexing variations both Imperial and Metric versions.

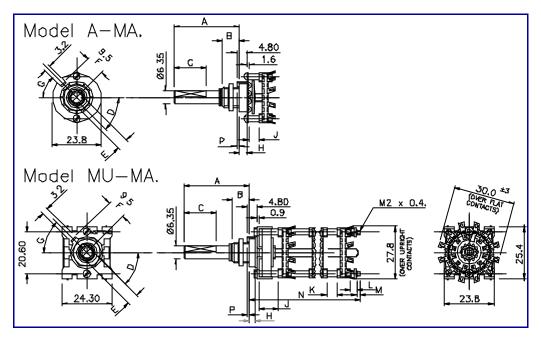

#### **Dimensions Are In Millimetres**

#### Key To Details

- A. Shaft length: optional  $\pm 0.40 (0.016")$
- B. Bushing thread length: preferred standard 9.5 (0.375"); 6.35 (0.250") available as an alternative. Special lengths if necessary
- C. Flat length: length to specification. Tolerance  $\pm 0.40$  (0.016"). Special shaft termination's may be provided to special requirements.
- D. Angle of flat: to specification  $\pm 2^{\circ}$ ; specify position of flat, with switch shaft in **fully anti-clockwise** position when viewed from front or knob end.
- E. Flat thickness: standard  $5.55 \pm 0.15$  for grub screws;  $4.95 \pm 0.05$  for push-on knobs.
- F. Distance of locating lug from shaft, centre line to centre line.
- G. Angle of locating lug: type MU mechanism; 45°,135°,225° and 315° from horizontal centre line; the alternative "A" type mechanism also includes 0° and 180° as viewed.

- H. Bushing shoulder; standard 3,2 (0.125")
- J. Front spacer, minimum dimension: MU-MA 9,5 (0.375"), A-MA 5
- K.
   Other spacers: minimum dimensions.

   Clips facing same direction
   NIL.

   Clips facing away or flat clips
   NIL.

   Clips facing each other
   3
- L. If no spacer 2,4. Any length spacer desired may be inserted at this point.
- M Thread extension: typically 3 x M2 x 0,4 any length. desired.
- P. Standard locating lug lengths: unsealed, projects 1.6 beyond mounting face; sealed, 0,05 / 0,15 below mounting face;

☎+44(0) 1535 661144



General Information	These slim indexing mechanisms provide a reduced dimension behind the panel compared with the standard mechanisms.				
Features,	Lower noise from the indexing with energy absorbing moulded components.				
	Exceptional electrical insulation.				
	Low capacitance.				
	Quiet operation with low friction factor.				
	Hygienic and corrosion resistance.				
	High strength moulded bush.				
	No additional lubrication from enclosed indexing mechanism.				

### New feature,

A recent improvement to the action on the 30° mechanism has improved the **positive action** or feel of the switch providing a more precise indexing which is almost impossible to tease indexed positions. To order this option please specify positive action version.


## Specification. Materials :-

Shaft and index wheel, Adjustable stop plate and Index housing :- Glass Filled Nylon.				
Plunger :-	Polyacetal.			
Index springs :-	Spring Music Wire			
Torque :-	Standard, 13 oz.ins.			
Life :-	20,000 cycles.			
Stops :-	One fixed stop in the housing with a rear adjustable stop plate.			
Struts :-	Standard 2mm. dia. maximum length 54mm.			
Shaft :-	Round, standard :- flats, to order.			
Maximum number of wafer	s per switch :- 3 (depending on total number of poles perswitch).			
Maximum number of poles	per switch :- 8			
Special switching requirements will be considered on request.				
Sealing :-	Not available.			

## Maximum Switching.

No. of Poles.	30° Index.MA	30° Index.PCA	30° Index. A	36° Index.MA
	12 Positions.	12 Positions.	12 Positions.	10 Positions.
1 Pole.	2 to 12 ways	2 to 12 ways	2 to 12 ways	2 to 10 ways
2 Pole.	2 to 7 ways	2 to 6 ways	2 to 6 ways	2 to 5 ways
3 Pole.	2 to 5 ways	2 to 3 ways	2 to 5 ways	2 to 4 ways
4 Pole.	2 to 4 ways	2 ways only	2 to 4 ways	2 or 3 ways
5 Pole.	2 to 3 ways	-	2 ways only	-
6 Pole.	2 ways only	-	2 ways only	-
7 Pole.	2 ways only	-	-	-

## **RW44**

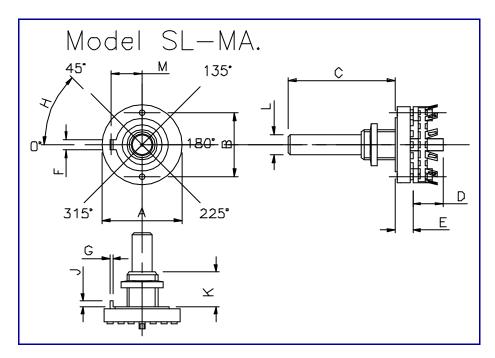

**Dimensions Are In Millimetres** 

#### Key To Details

- A. Diameter of mechanism ;- 25,4mm
- B. Strut centres ;- 20,6mm
- C. Front shaft ;- 48,6mm maximum
- D. Rear shaft ;-28,9mm
- E. Mounting face to first wafer ;-MA model 6,3mm PCA model and A models 9,5mm
- F. Locating lug width ;- 3,2mm
- G. Location lug thickness ;- 1,5mm
- H. Angle of locating lug :- standard, 0 and 180 degrees ; to order,  $45^{\circ}$ ,  $135^{\circ}$ ,  $225^{\circ}$  and  $315^{\circ}$
- J. Locating lug depth ; 2,4mm. Protrudes 1,7mm from mounting face.
- K. Bushing thread length ; 10mm thread M10 x 0,75.
- L. Shaft diameter ; 6mm
- M. Distance of locating lug from centre line through shaft ; 9,5mm.