

RF / Coaxial Cable Assembly

IP67 N Bulkhead Jack-to-MCX Right Angle Plug, 200mm

multicomp PRO


RoHS Compliant




Electrical Performance:

| | |
|---------------------------------|----------------|
| Impedance | : 50Ω |
| Frequency Range | : DC ~ 6.0 Ghz |
| Working Voltage | : 170Vrms Max. |
| Dielectric Withstanding Voltage | : 750Vrms Max. |
| Insulator Resistance | : 1000MΩ Min. |

Diagram

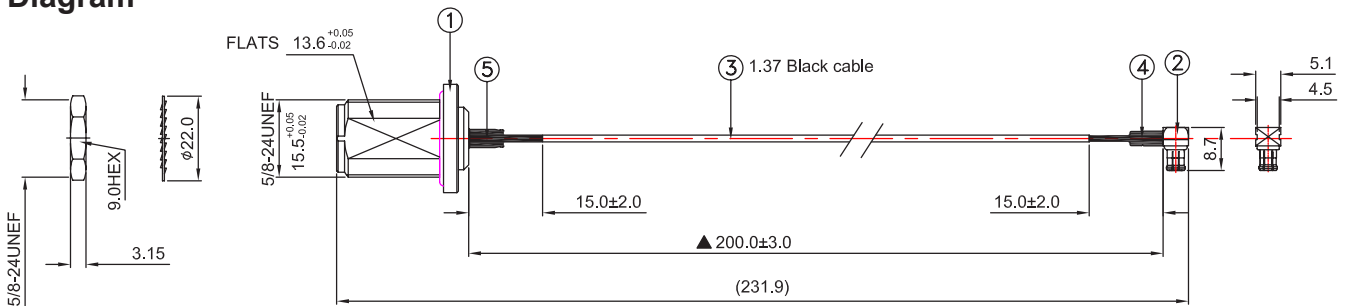


| | |
|----------------------|---------------------|
| Specification | DC ~ 6.0 GHz |
| VSWR | 1.65 : 1 Max. |
| Insertion Loss | -1.5 dB Max. |

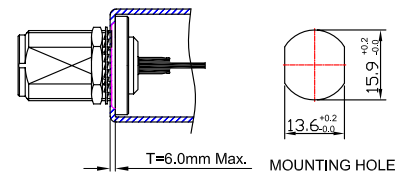


Dimensions : Millimetres

| Sl. | Description | Qty |
|-----|--|-----|
| 1 | N Bulkhead Jack Crimp for 1.37mm Cable | 1 |
| 2 | MCX R/A Plug Crimp for OD 1.37mm Cable | |
| 3 | 1.37mm Black Cable | |
| 4 | Heat Shrink Tube F32 Ø2.5mm L=15mm Colour: Black | |
| 5 | Heat Shrink Tube F32 Ø3mm L=15mm Colour: Black | |


1 PCS/1PE BAG SIZE:4.5"x3.5"

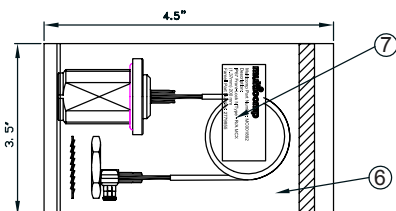

⑦ 3.5"x4.5" PE BAG LABLE SIZE:60x40mm

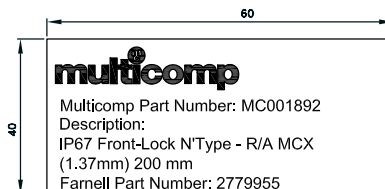



9 11"x13" PE BAG LABLE SIZE:40x15mm



Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro

multicomp PRO

RF / Coaxial Cable Assembly
IP67 N Bulkhead Jack-to-MCX Right Angle Plug, 200mm

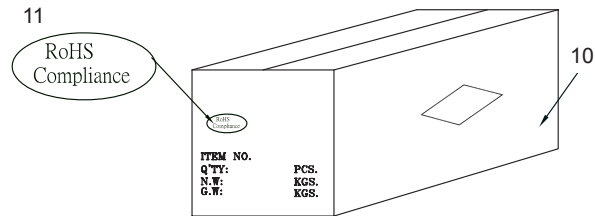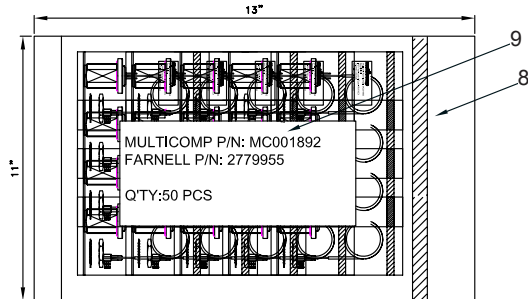

Note:

1. 1 piece finished Product (include nut and washer)/1 PE Bag
2. 11" x 13" PE bag (250 pcs)/1 Carton

| Item | Description | Qty |
|------|---|-----|
| 6 | PE Bag 0.07mm, 3.5" x 4.5" | 1 |
| 7 | 3.5" x 4.5" PE Bag Lable size : 60mm x 40mm | |
| 8 | PE Bag 0.07mm, 11" x 13" | |
| 9 | 11" x 13" PE Bag Lable Size: 40mm x 15mm | |
| 10 | Carton, Size: 33cm x 22cm x 22cm | |
| 11 | RoHS Logo Lable size: 45mm x 20mm | |

Part Number Table

| Description | Part Number |
|--|-------------|
| RF / Coaxial Cable Assembly IP67 N Bulkhead Jack-to-MCX Right Angle Plug , 200mm | MC001892 |

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro

