


## MN10 Pocket MultiMeter + NCV



**Affordable pocket sized multimeter that's fully loaded with 7 functions including built-in Non-Contact Voltage (NCV) detector, AC/DC Voltage, Current, Resistance, and Battery Test! Its easy-to-use manual ranging design allows you to select the voltage, current, or resistance range you are testing. Perfect for students, DIYs, and entry level electricians.**

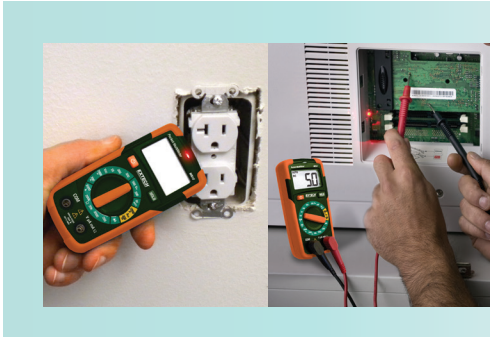

### Features

- Manual ranging multimeter with 2000 count display
- Built-in non-contact Voltage Detector for quick detection of live circuits
- AC/DC Voltage measures up to 500V
- Functions include AC/DC Voltage, DC Current, Resistance, and Diode Test
- Test the quality of 9V batteries
- Data hold freezes reading on display
- CAT II-300V rating
- Complete with test leads and A23 12V battery

Specifications	Range	Resolution	Basic Accuracy
NC Voltage Detector	100 to 600VAC		
DC Voltage	500V	0.1mV	±0.5%
AC Voltage (max res)	500V	0.1V	±1.2%
DC Current (max res)	200mA	1µA	±1.2%
Resistance (max res)	2000kΩ	0.1Ω	±0.8%
Battery Test	9V		±1.2%
DiodeTest	Yes		
Dimensions	4.3x2.1x1.3" (108x53X32mm)		
Weight	3.6oz (102g)		

### Ordering

MN10 ..... Pocket MultiMeter + NCV



UPC Code: 793950782101