Type RAVT Resettable Fuse (PTC's) Battery Strap



www.optifuse.com

(619) 593-5050

Application:

Rechargeable battery packs Lithium cell and battery packs

Product Features:

Low profile, Solid State

Operation Current: 1.1A ~ 2.4A **Maximum Voltage:** 16VDC

Temperature Range: -40°C to 85°C

Agency Standards and Listings:







Electrical Characteristics (23°C)

	Hold Trip		Max. Time	Rated	Max	Typical	Resistance Tolerance		
Part	Current	Current	to Trip	Voltage	Current	Power	R_{MIN}	R_{MAX}	$R1_{MAX}$
Number	I _H , A	I _T , A	at 5xI _H ,s	V _{MAX} , Vdc	I_{MAX} , A	Pd, W	Ω	Ω	Ω
RAVT-110	1.10	2.7	5.0	16	100	0.7	0.038	0.070	0.140
RAVT-170	1.70	3.4	5.0	16	100	0.7	0.030	0.052	0.105
RAVT-175	1.75	3.6	5.0	16	100	0.8	0.029	0.051	0.102
RAVT-200	2.00	4.7	5.0	16	100	0.9	0.022	0.039	0.078
RAVT-210G	2.10	4.7	5.0	16	100	1.2	0.018	0.030	0.060
RAVT-240	2.40	5.9	5.0	16	100	1.0	0.014	0.026	0.052

I_H = Hold Current – Maximum current at which the device will not trip at 23°C still air.

 I_T = Trip Current – Minimum current at which the device will always trip at 23°C still air.

 V_{MAX} = Maximum voltage device can withstand without damage at it's rated current.

 I_{MAX} = Maximum fault current device can withstand without damage at rated voltage (V max).

Pd = Maximum power dissipated from device when in the tripped state in 23°C still air environment.

 $\mathbf{R}_{\mathbf{MIN}}$ = Minimum device resistance at 23°C.

R1_{MAX} = Maximum device resistance at 23°C, 1 hour after tripping.

Physical Specifications:

Lead Material: 0.13 mm nominal thickness, quarter hard nickel

Insulating Material: Polyester tape

Note: All specifications subject to change without notice.

Rev A 11/2012 - Page: 1/3

Code F01-01H


Type RAVT Resettable Fuse (PTC's) Battery Strap



www.optifuse.com


(619) 593-5050

RAVT Product Dimensions (millimeters)

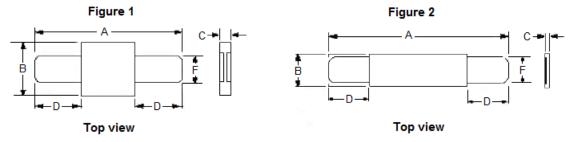

Part Number	E: ~	A		В		C		D		F	
	Fig	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
RAVT-110	2	23.6	25.6	2.6	2.9	0.5	0.9	7.0	8.0	2.3	2.5
RAVT-170	1	15.4	17.5	7.0	7.4	0.5	0.9	4.0	6.2	3.9	4.1
RAVT-175	2	21.0	23.0	3.5	3.9	0.5	0.9	4.6	6.6	2.9	3.1
RAVT-200	2	21.0	23.0	4.1	4.5	0.5	0.9	3.0	4.8	2.9	3.1
RAVT-210G	2	21.0	23.0	4.9	5.2	0.5	0.9	4.1	5.5	3.9	4.1
RAVT-240	2	23.8	26.0	4.9	5.3	0.5	0.9	3.5	5.5	3.9	4.1

Thermal Derating Curve – RAVT Series

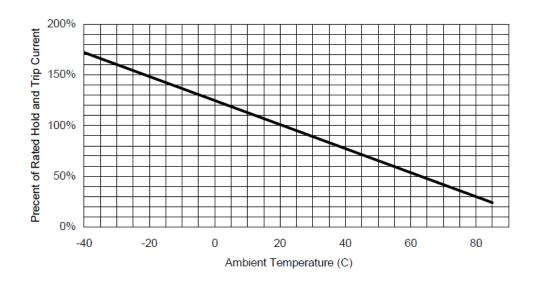

Note: All specifications subject to change without notice.

Rev A 11/2012 - Page: 2/3 Code F01-01H

Type RAVT Resettable Fuse (PTC's) Battery Strap



www.optifuse.com

(619) 593-5050

Typical Time-To-Trip at 23°C

			7		
A = RAVT-110					
B = RAVT-170		ABCD EF			
C = RAVT-175	100				
D = RAVT-200					
E = RAVT-210G	40				
$\mathbf{F} = \mathbf{RAVT-240}$	10				
	ο 1				
) di				
	0-tr				
	Time-to-trip (S)				
	<u></u> 0.1 <u></u> ■				
	0.01				
	0.01				
	7				
	0.001		N		
	1	10	100		
	Fault Current (A)				

Standard Packaging

Part Number	Pcs/Bag		
RAVT-110 ~ RAVT-210G	1K		
RAVT-240	500		



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.

-Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

Note: All specifications subject to change without notice.

Rev A 11/2012 - Page: 3/3 Code F01-01H