
# OSLON Black Series (940 nm) - 80° Preliminary Version 0.0

### **SFH 4725AS A01**



#### Features:

- IR lightsource with high efficiency
- Double Stack emitter
- Low thermal resistance (Max. 9 K/W)
- · Centroid wavelength 940 nm
- · Optimized for high current pulsed operation
- Superior Corrosion Robustness (see chapter package outlines)
- The product qualification test plan is based on the guidelines of AEC-Q101-REV-C, Stress Test Qualification for Automotive Grade Discrete Semiconductors.

#### **Applications**

- · Driver assistance systems
- · Gesture recognition systems
- · Night vision systems
- · Infrared Illumination for cameras
- · Eye tracking systems

# **Notes**

Depending on the mode of operation, these devices emit highly concentrated non visible infrared light which can be hazardous to the human eye. Products which incorporate these devices have to follow the safety precautions given in IEC 60825-1 and IEC 62471.

#### **Ordering Information**

Туре:	Radiant Intensity	Ordering Code
	I <sub>e</sub> [mW/sr]	
	I <sub>F</sub> = 1 A, t <sub>p</sub> = 10 ms	
SFH 4725AS A01	760 (≥ 400)	Q65112A0273

Note: measured at a solid angle of  $\Omega = 0.01$  sr



# Maximum Ratings $(T_A = 25 \, ^{\circ}C)$

Parameter	Symbol	Values	Unit
Operating temperature range	T <sub>op</sub>	-40 125	°C
Storage temperature range	T <sub>stg</sub>	-40 125	°C
Junction temperature	T <sub>j</sub>	145	°C
Reverse voltage	V <sub>R</sub>	1	V
Forward current	I <sub>F</sub>	1500	mA
Surge current $(t_p = 450 \mu s, D = 0.005)$	I <sub>FSM</sub>	5	А
Power consumption	P <sub>tot</sub>	5.2	W
Thermal resistance junction - solder point	R <sub>thJS</sub>	9	K/W
ESD withstand voltage (acc. to ANSI/ ESDA/ JEDEC JS-001 - HBM)	V <sub>ESD</sub>	2	kV

Note: For the forward current and power consumption please see "maximum permissible forward current" diagram

# Characteristics $(T_A = 25 \, ^{\circ}C)$

Parameter		Symbol	Values	Unit
Peak wavelength $(I_F = 1 \text{ A}, t_p = 10 \text{ ms})$	(typ)	$\lambda_{peak}$	950	nm
Centroid wavelength $(I_F = 1 \text{ A}, t_p = 10 \text{ ms})$	(typ)	$\lambda_{ ext{centroid}}$	940	nm
Spectral bandwidth at 50% of $I_{max}$ ( $I_F = 1 \text{ A}, t_p = 10 \text{ ms}$ )	(typ)	Δλ	37	nm
Half angle	(typ)	φ	± 40	0
Dimensions of active chip area	(typ)	LxW	1 x 1	mm x mm
Rise and fall times of $I_e$ ( 10% and 90% of $I_{e max}$ ) ( $I_F = 5 \text{ A}, R_L = 50 \Omega$ )	(typ)	t <sub>r</sub> / t <sub>f</sub>	10/ 15	ns
Forward voltage $(I_F = 1 \text{ A}, t_p = 100 \mu\text{s})$	(typ (max))	V <sub>F</sub>	2.65 (≤ 3.2)	V
Forward voltage $(I_F = 1.5 \text{ A}, t_p = 100 \mu\text{s})$	(typ (max))	V <sub>F</sub>	2.75 (≤ 3.45)	V
Forward voltage $(I_F = 5 \text{ A}, t_p = 100 \mu\text{s})$	(typ)	V <sub>F</sub>	3.2 (≤ 4.3)	V
Reverse current (V <sub>R</sub> = 5 V)		I <sub>R</sub>	not designed for reverse operation	μΑ

Parameter		Symbol	Values	Unit
Total radiant flux $(I_F = 1.5 \text{ A}, t_p = 100 \mu\text{s})$	(typ)	Фе	1970	mW
Total radiant flux $(I_F = 1 \text{ A}, t_p = 100 \mu\text{s})$	(typ)	Фе	1340	mW
Radiant intensity $(I_F = 1.5 \text{ A}, t_p = 100 \mu\text{s})$	(typ)	I <sub>e typ.</sub>	1140	mW/sr
Temperature coefficient of $I_e$ or $\Phi_e$ ( $I_F = 1 \text{ A}$ , $t_p = 10 \text{ ms}$ )	(typ)	TC <sub>I</sub>	-0.3	% / K
Temperature coefficient of $V_F$ ( $I_F = 1 \text{ A}, t_p = 10 \text{ ms}$ )	(typ)	TC <sub>V</sub>	-2	mV / K
Temperature coefficient of wavelength $(I_F = 1 \text{ A}, t_p = 10 \text{ ms})$	(typ)	TC <sub>λ</sub>	0.3	nm / K


# **Grouping** $(T_A = 25 \, ^{\circ}C)$

Group	Min Radiant Intensity	Max Radiant Intensity	
	I <sub>F</sub> = 1 A, t <sub>p</sub> = 10 ms	I <sub>F</sub> = 1 A, t <sub>p</sub> = 10 ms	
	I <sub>e, min</sub> [mW / sr]	I <sub>e, max</sub> [mW / sr]	
SFH4725AS A01 - DA	400	630	
SFH4725AS A01 - DB	500	800	
SFH4725AS A01 - EA	630	1000	

Note: measured at a solid angle of  $\Omega = 0.01$  sr


Only one group in one packing unit (variation lower 1.6:1).

# Relative Spectral Emission 1) page 13

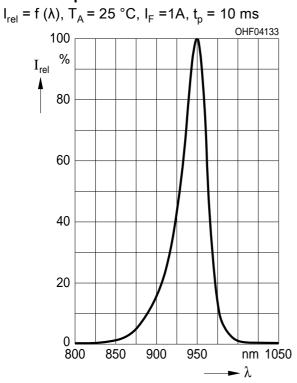


# Max. Permissible Forward Current

$$I_F = f(T_S), R_{thJS} = 9 \text{ K/W}$$

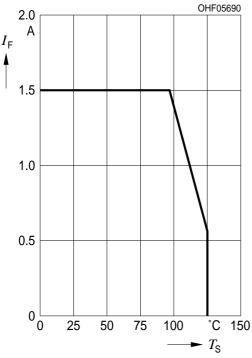


# Relative Total Radiant Flux 1) page 13

$$\Phi_{\rm e}/\Phi_{\rm e}(1{\rm A})$$
 = f (I<sub>F</sub>), T<sub>A</sub> = 25 °C, Single pulse, t<sub>p</sub> = 100 µs

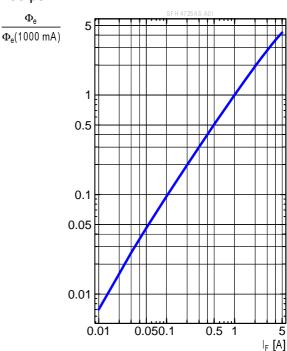


# Forward Current 1) page 13

$$I_F = f(V_F)$$
, single pulse,  $t_p = 100 \mu s$ ,  $T_A = 25^{\circ} C$ 

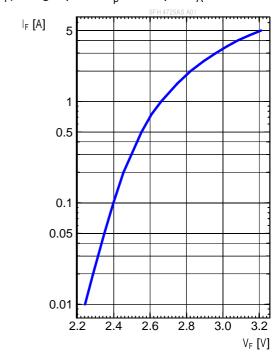


# **Permissible Pulse Handling Capability**

 $I_F = f(t_p)$ ,  $T_S = 85$  °C, duty cycle D = parameter

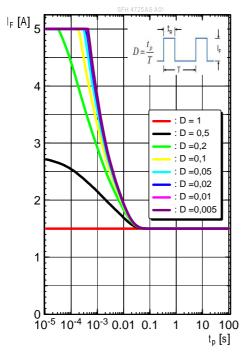


# Radiation Characteristics 1) page 13

$$I_{rel} = f(\phi), T_A = 25^{\circ}C$$

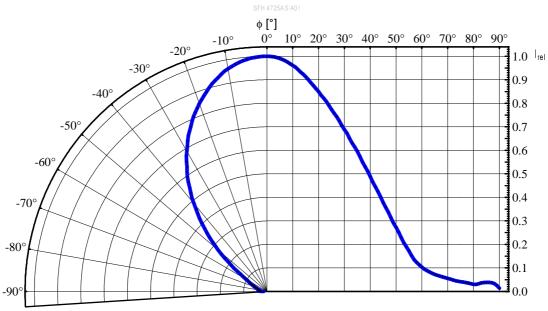

## **Package Outline**

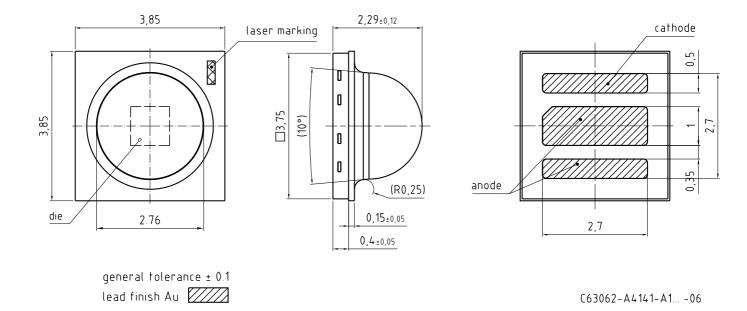

Dimensions in mm.

## **Package**

**OSLON Black Series** 

#### **Approximate Weight:**

31 mg

#### Note:

Package is not suitable for ultra sonic cleaning.


#### Note:

Corrosion robustness better than EN 60068-2-60 (method 4): with enhanced corrosion test: 40°C / 90%rh / 15ppm H2S / 336h

#### Note:

Anode mark: the chamfered edge of the center pad points to the cathode

#### **Recommended Solder Pad**

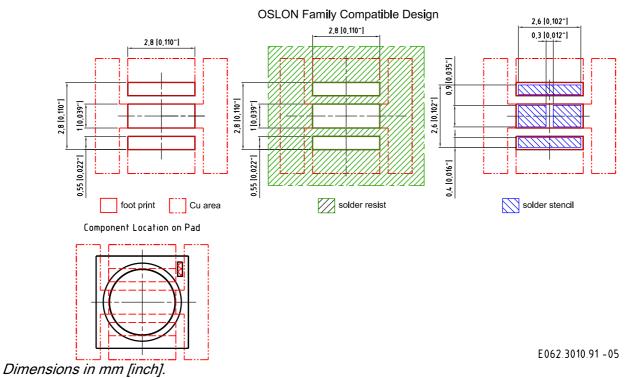


#### Note:

For superior solder joint connectivity results we recommend soldering under standard nitrogen atmosphere.

# **Reflow Soldering Profile**

Product complies to MSL Level 2 acc. to JEDEC J-STD-020E

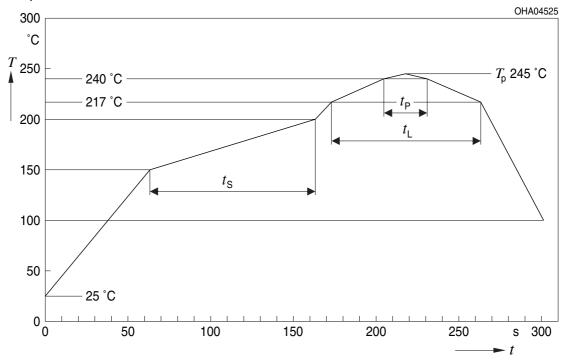


					OHA04612
Profile Feature	Symbol	Pb-F	Unit		
Profil-Charakteristik	Symbol	Minimum	Recommendation	Maximum	Einheit
Ramp-up rate to preheat*) 25 °C to 150 °C			2	3	K/s
Time t <sub>s</sub> T <sub>Smin</sub> to T <sub>Smax</sub>	t <sub>S</sub>	60	100	120	s
Ramp-up rate to peak*) T <sub>Smax</sub> to T <sub>P</sub>			2	3	K/s
Liquidus temperature	T <sub>L</sub>	217			°C
Time above liquidus temperature	t <sub>L</sub>		80	100	s
Peak temperature	T <sub>P</sub>		245	260	°C
Time within 5 °C of the specified peak temperature T <sub>P</sub> - 5 K	t <sub>P</sub>	10	20	30	S
Ramp-down rate* T <sub>P</sub> to 100 °C			3	6	K/s
Time 25 °C to T <sub>P</sub>				480	S

All temperatures refer to the center of the package, measured on the top of the component

<sup>\*</sup> slope calculation DT/Dt: Dt max. 5 s; fulfillment for the whole T-range

# **Taping**

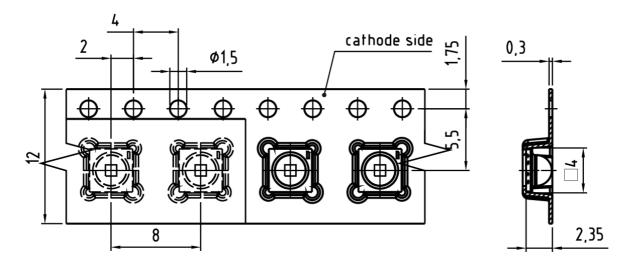


C63062-A4141-B8 -02

Dimensions in mm.

# **Tape and Reel**

12 mm tape with 600 pcs. on  $\varnothing$  180 mm reel

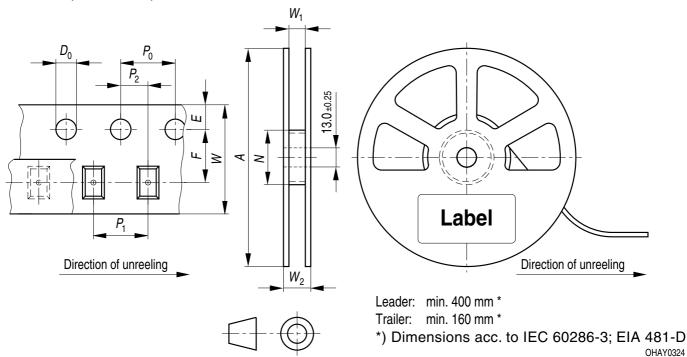

#### Tape dimensions [mm]

W	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	$D_0$	E	F
12 + 0.3 / - 0.1	4 ± 0.1	4 ± 0.1 or	2 ± 0.05	1.5 ± 0.1	1.75 ± 0.1	5.5 ± 0.05
		8 ± 0.1				


#### Reel dimensions [mm]

Α	W	N <sub>min</sub>	W <sub>1</sub>	W <sub>2max</sub>
180	12	60	12.4 + 2	18.4

# **Barcode-Product-Label (BPL)**




# **Dry Packing Process and Materials**

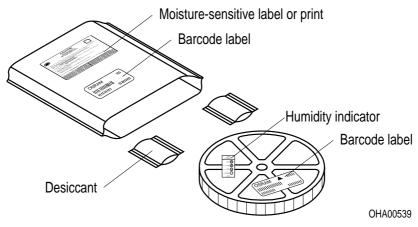

#### Note:

Moisture-sensitive product is packed in a dry bag containing desiccant and a humidity card. Regarding dry pack you will find further information in the internet. Here you will also find the normative references like JEDEC.

# **Transportation Packing and Materials**

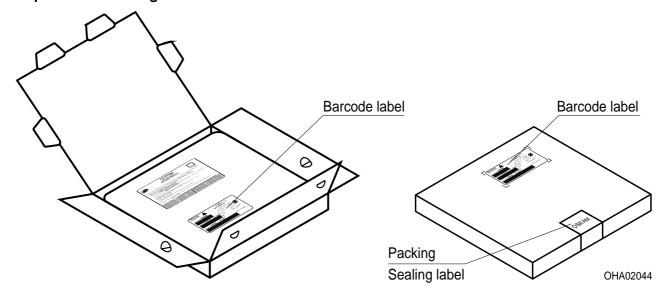

# Dimensions of transportation box in mm

Width	Length	Height
195 ± 5	195 ± 5	30 ± 5

#### **Disclaimer**

OSRAM OS assumes no liability whatsoever for any use of this document or its content by recipient including, but not limited to, for any design in activities based on this preliminary draft version. OSRAM OS may e.g. decide at its sole discretion to stop developing and/or finalising the underlying design at any time.

Language english will prevail in case of any discrepancies or deviations between the two language wordings.

#### Attention please!

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version in the Internet.

#### **Packing**

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Components used in life-support devices or systems must be expressly authorized for such purpose! Critical components\* may only be used in life-support devices\*\* or systems with the express written approval of OSRAM OS.

- \*) A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or the effectiveness of that device or system.
- \*\*) Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health and the life of the user may be endangered.



#### Glossary

Typical Values: Due to the special conditions of the manufacturing processes of LED, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.

**Published by OSRAM Opto Semiconductors GmbH** Leibnizstraße 4, D-93055 Regensburg www.osram-os.com © All Rights Reserved.

EU RoHS and China RoHS compliant product 此产品符合欧盟 RoHS 指令的要求; 按照中国的相关法规和标准,不含有毒有害物质或元素。

2018-02-21