


Features

1. Normally open, single pole single throw.
2. Control 350VAC or DC voltage.
3. Switch 130mA loads.
4. LED control current, 5mA.
5. Low ON-resistance.
6. dv/dt, >500V/mS.
7. Isolation test voltage, 1500VRMS.

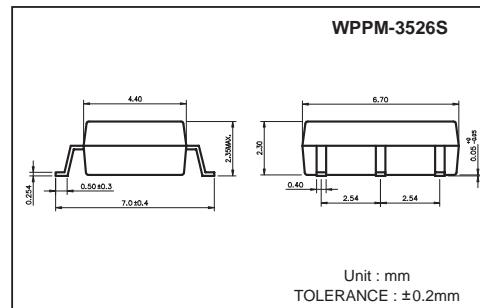


Part Numbering System & Part Marking System: Page 3 & 4.

Absolute Maximum Ratings

(Ta=25°C)

| Emitter (Input) | Detector (Output) |
|--|--|
| Reverse Voltage.....5.0V | Output Breakdown Voltage±350V |
| Continuous Forward Current50mA | Continuous Load Current±130mA |
| Peak Forward Current1A | Power Dissipation500mW |
| Power Dissipation100mW | |
| Derate Linearly from 25°C1.3mW/°C | |
| General Characteristics | |
| Isolation Test Voltage1500VRMS | Storage Temperature Range ...-40°C to +125°C |
| Isolation Resistance | Operating Temperature Range...-30°C to +85°C |
| V _{IO} = 500V, TA = 25°C≥10 ¹⁰ Ω | Junction Temperature.....100°C |
| Total Power Dissipation550mW | Soldering Temperature, |
| Derate Linearly from 25°C2.5mW/°C | 2mm from case, 10 sec260°C |

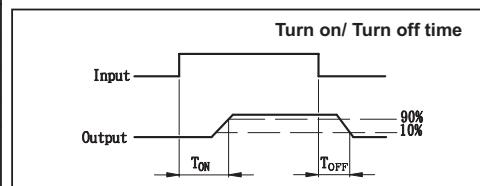


Electro-optical Characteristics

(Ta=25°C)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------|-------------------|---|---|------|------|------|
| Emitter (Input) | | | | | | |
| Forward Voltage | V _F | I _F = 10mA | | 1.2 | 1.5 | V |
| Operation Input Current | I _{IFON} | V _L = ±20V, I _L = 100mA, t = 10mS | | | 5 | mA |
| Recovery Input Current | I _{IOFF} | V _L = ±20V, I _L ≤ 5μA | 0.2 | | | mA |
| Detector (Output) | | | | | | |
| Output Breakdown Voltage | V _B | I _B = 50μA | 350 | | | V |
| Output Off-State Leakage | I _{TOFF} | V _T = 100V, I _F = 0mA | | 0.2 | 1 | μA |
| I/O Capacitance | C _{I/O} | I _F = 0, f = 1MHz | | 6 | | pF |
| ON Resistance | Connection | R _{ON} | I _L = 100mA, I _F = 10mA | 20 | 30 | Ω |
| | | | | 10 | 15 | |
| | | | | 5 | 7.5 | |
| Turn-On Time | T _{ON} | I _F = 10mA, V _L = ±20V t = 10mS, I _L = ±100mA | | 0.3 | 1.0 | mS |
| Turn-Off Time | T _{OFF} | | | 0.7 | 1.5 | mS |

MOS Relay Schematic and Wiring Diagrams

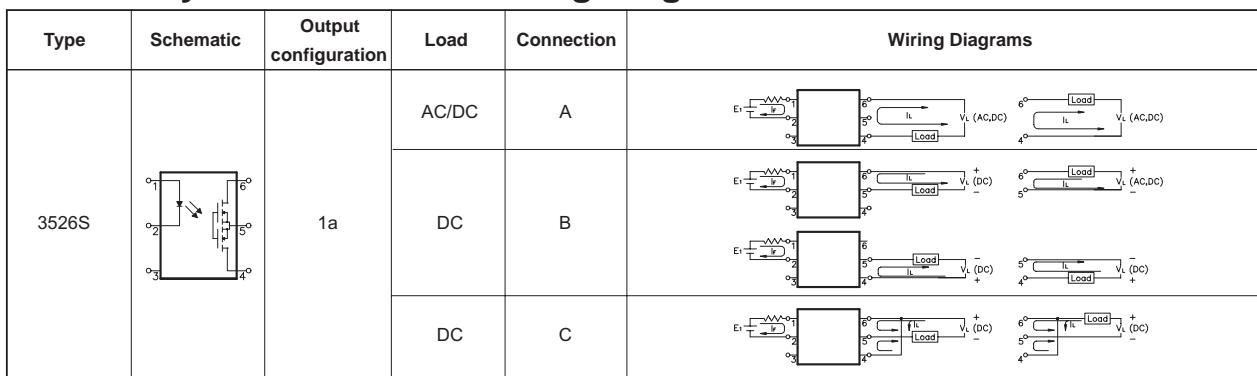



Data Curve

Fig.1 Load current vs. ambient temperature
Allowable ambient temperature:
-40°C to +85°C

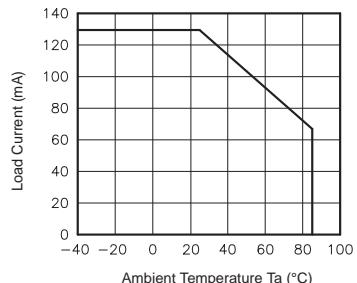


Fig.2 On resistance vs. ambient temperature
Across terminals 4 and 6 pin
LED current: 5mA
Continuous load current: 130mA(DC)

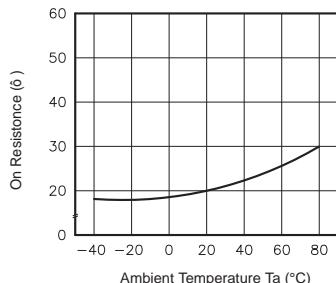


Fig.3 Turn on time vs. ambient temperature
Across terminals 4 and 6 pin
LED current: 5mA
Continuous load current: 130mA(DC)

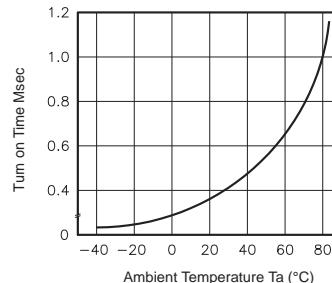


Fig.4 Turn off time vs. ambient temperature
LED current: 5mA; Load voltage:
350V(DC)
Continuous load current: 130mA(DC)

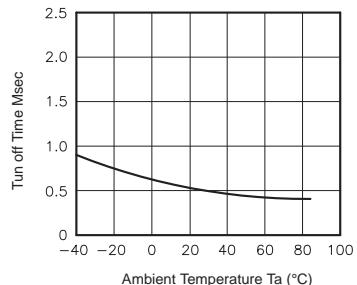


Fig.5 LED operate vs. ambient temperature
Load voltage 350V(DC)
Continuous load current: 130mA(DC)




Fig.6 LED turn off current vs. ambient temperature
Load voltage 350V(DC)
Continuous load current: 130mA(DC)

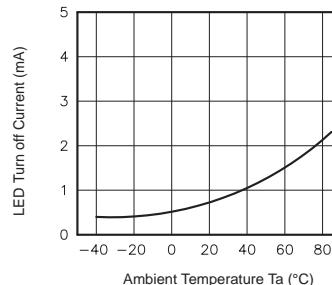


Fig.7 LED dropout voltage vs. ambient temperature
LED current: 5 to 50mA

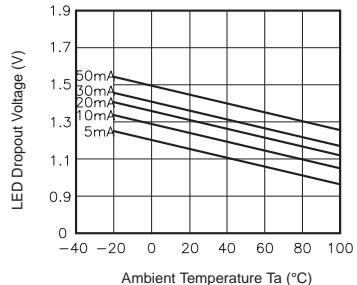


Fig.8 Voltage vs. current characteristics of output at MOS FET portion
Measured portion: across terminals 4 and 6 pin
Ambient temperature: 25°C

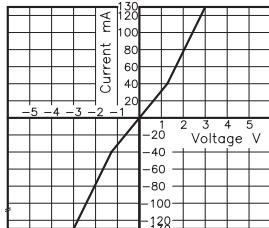


Fig.9 Off state leakage current
Across terminals 4 and 6 pin
Ambient temperature: 25°C

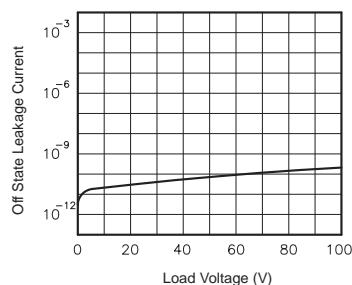


Fig.10 LED forward current vs. turn on time
Across terminals 4 and 6 pin;
Load voltage: 350V (DC);
Continuous load current: 130mA (DC);
Ambient temperature: 25°C




Fig.11 LED forward current vs. turn off time
Across terminals 4 and 6 pin;
Load voltage: 350V (DC);
Continuous load current: 130mA (DC);
Ambient temperature: 25°C

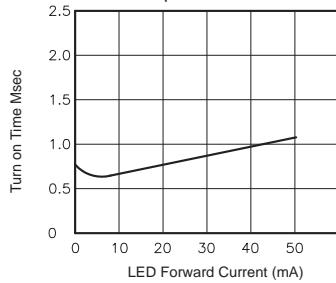


Fig.12 Applied voltage vs. output capacitance
Across terminals 4 and 6 pin
Frequency: 1MHz
Ambient temperature: 25°C

