

SPECIFICATIONS:

Pressure rating:

150 PSIG (10 BAR) NEMA 4x and 6
(Submersible) IP 68


Materials:

Body: Nylon 6/6
Clamping Nut: Anodized Aluminum
Form Seal: Buna-N
Optional O-Ring: Buna-N

Operating Temperature:

-4°F to 158°F (-20°C to 70°C)

| PART NUMBERS | CABLE RANGE inches (mm) | THREAD TYPE AND SIZE For thread specs see page 29 | DIMENSIONS INCHES (MM) | | | |
|------------------------|--|--|---------------------------------------|------------------------------------|--------------------------------|--------------------------------|
| | | | A Clearance Hole +.010" .000 | B Body Height Clamp Fittings | D Thread Length Fittings | F1/F Wrenching Flats |
| CD09AA-CP CD16MA-CP | .16 - .31 (4 - 8) .16 - .31 (4 - 8) | PG 9 M16 x 1,5 | .60 (15.2) .63 (16.0) | 1.14 (29) | .59 (15) | .75 (19) |
| CD11AA-CP CD20MA-CP | .24 - .39 (6 - 10) .24 - .47 (6 - 12) | PG 11 M20 x 1,5 | .73 (18.5) .79 (20.0) | 1.28 (32.5) 1.40 (35.5) | .59 (15) | .87 (22) .94 (24) |
| CD13AA-CP CD16AA-CP | .24 - .47 (6 - 12) .39 - .55 (10 - 14) | PG 13 PG 16 | .80 (20.3) .88 (22.3) | 1.40 (35.5) 1.48 (37.5) | .59 (15) .39 (10) | .94 (24) 1.06 (27) |
| CD25MA-CP CD21AA-CP | .51 - .71 (13 - 18) .51 - .71 (13 - 18) | M25 x 1,5 PG 21 | .98 (25.0) 1.12 (28.4) | 1.61 (41) | .43 (11) | 1.30 (33) |
| CD32MA-CP CD29AA-CP | .71 - .98 (18 - 25) .71 - .98 (18 - 25) | M32 x 1,5 PG 29 | 1.26 (32.0) 1.47 (37.3) | 1.93 (49) | .43 (11) | 1.65 (42) |
| CD40MA-CP CD36AA-CP | .87 - 1.26 (22 - 32) .87 - 1.26 (22 - 32) | M40 x 1,5 PG 36 | 1.57 (40.0) 1.85 (47.0) | 2.28 (58) | .51 (13) | 2.09 (53) |
| CD50MA-CP CD42AA-CP | 1.26 - 1.50 (32 - 38) 1.26 - 1.50 (32 - 38) | M50 x 1,5 PG 42 | 1.97 (50.0) 2.13 (54.1) | 2.42 (61.5) | .51 (13) | 2.36 (60) |
| CD48AA-CP CD63MA-CP | 1.46 - 1.73 (37 - 44) 1.46 - 1.73 (37 - 44) | PG 48 M63 x 1,5 | 2.34 (59.4) 2.48 (63.0) | 2.44 (62) | .55 (14) | 2.56 (65) 2.56(65)/2.68(68) |

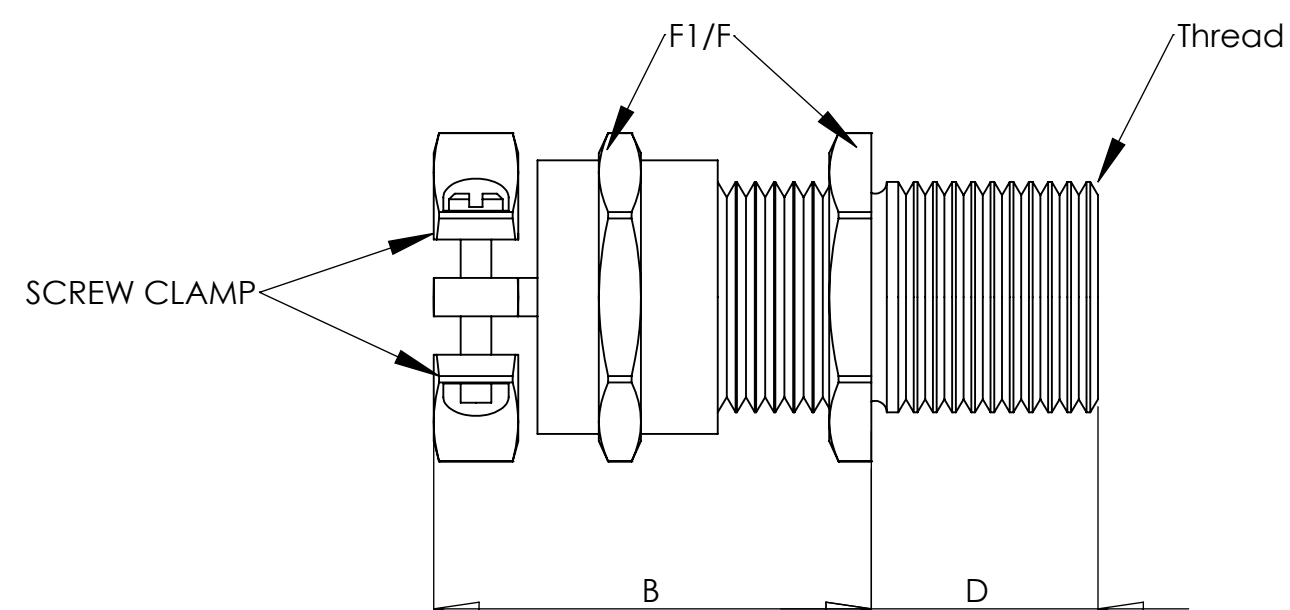

NOTES:

- 1) GENERAL DIMENSIONS DRAWINGS.
- 2) DIMENSIONS [] ARE IN INCHES.
- 3) DIMENSIONS NOTED ARE FOR REFERENCE ONLY.

Third angle projection

SEALCON

14853 HINDSDALE AVE, SUITE D
CENTENNIAL, CO 80112-4240, USA
TEL: +1-303-699-1135
TOLL FREE: +1-800-456-9012
E MAIL: info@sealconusa.com,
WEBSITE: www.sealconusa.com