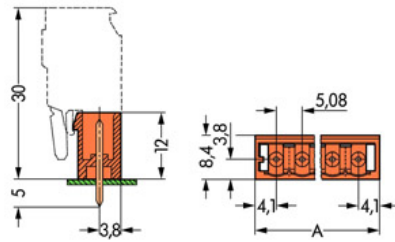

Item no.: 231-364/001-000
Product description: HEADER; STRAIGHT SOLDER PIN, 1.2 X 1.2 MM /0.047 X 0.047 IN; 4 POLE; PIN SPACING 5.08 MM / 0.2 IN; MATING DIRECTION PERPENDICULAR TO PCB; WITH CLOSED END



Packing unit 200 4*50 pieces

Product group	3 (Multi Conn. System)
Pin spacing from	5,08 mm
Pin spacing from	0,2 in
pole count	4
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	16 A
Weight	1,692 g
Color	orange
Height	12 mm
Height	0,472 in
Width	23,52 mm
Width	0,926 in
Depth	8,4 mm
Depth	0,331 in



Item number	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm ²]
231-364/001-000	ABS	04-HG469925-PDA	400	12	0,8-2,5
231-364/001-000	BV	11915/A0	400	16	2,5
231-364/001-000	CCA	5764	250	16	1,2x,21
231-364/001-000	CSA	154112-1466354	300	15	
231-364/001-000	DEMKO	88126	250		2,5
231-364/001-000	GL	17296-00HH	400	12	0,8-2,5
231-364/001-000	KEMA	2083746.02	250	16	1,2x,21
231-364/001-000	KR	HMB05880-EL003	250/400	12/16	2,5
231-364/001-000	LR	96/20035	400	12	0,8-2,5
231-364/001-000	NEMKO	P94101840	250		2,5
231-364/001-000	RMR	11130002	400	12	0,8-2,5
231-364/001-000	UR	E45171	600	15	
231-364/001-000	UR	E45172	300	15	

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected