

Cannon VG/CA-Bayonet



Contacts

Standard contacts and contacts with reduced termination diameter

Size 15S/16S, 15/16, 25/12, 60/100/8, 160/4, 500/0

Size 10/20

Pin contacts

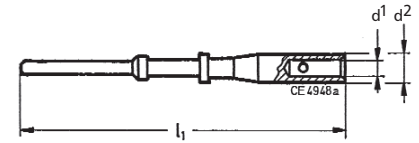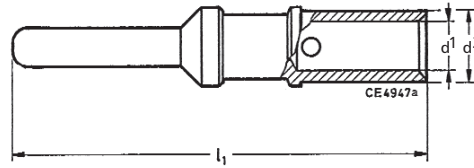

Finish

- A36 – 5 m silver plated and passivated
- A176 – 2 m nickel plated, min. 0,5 m gold

Contact size	VG95234 Part no.	Wire size mm ²	AWG	Part no. with finish Standard: A36 silver plated	Part no. with finish Mod. Code: A176 gold plated	d ₁	d ₂	l ₁ ±0,15	Color Code
10/20	VG95234P10-002	0,5-1,0	20/18	030-8585-000	030-8585-006	1,5 +0,05	2,4 -0,05	28,4	–
	VG95234P10-001	0,2-0,4	26/22	030-8585-010	–	0,9 +0,05	2,4 -0,05	28,4	blue
15S/16S	VG95234P15S-003	0,75-1,5	18/16	030-8586-000	030-8586-006	1,75 +0,08	2,75 -0,05	27,4	–
	VG95234P15S-002	0,3-0,6	22/20	330-8744-000	330-8744-006	1,2 +0,1	2,75 -0,05	27,4	red
	VG95234P15S-001	0,14-0,38	22/26	030-8586-010	–	0,9 +0,05	2,75 -0,05	27,4	blue
15/16	VG95234P15-003	0,75-1,5	18/16	030-8587-000	030-8587-006	1,75 +0,08	2,75 -0,05	31,4	–
	VG95234P15-002	0,3-0,6	22/20	330-8659-000	330-8659-006	1,2 +0,1	2,75 -0,05	31,4	red
	VG95234P15-001	0,14-0,38	22/26	030-8587-030	030-8587-036	0,9 +0,05	2,75 -0,05	31,4	blue
25/12	VG95234P25-002	2,0-3,0	14/12	030-8588-000	030-8588-006	2,5 +0,1	3,8 -0,1	37,0	–
	VG95234P25-001	0,75-1,5	18/16	030-8588-010	030-8588-016	1,75 +0,08	3,4 -0,1	37,0	black
		4,0	–	–	030-8588-054	–	2,8 +0,1	3,8 -0,1	37,0
60/100/8	VG95234P8-001	–	8	030-8612-000	030-8612-006	4,55 +0,1	6,8 -0,1	39,6	–
	VG95234P60-002	6,0	10	030-8589-000	–	3,5 +0,1	6,8 -0,1	39,6	yellow
	VG95234P100-001	10,0	–	030-8590-000	–	4,8 +0,1	6,8 -0,1	39,6	–
	VG95234P60-001	2,0-3,0	14/12	030-8612-010	–	2,5 +0,05	6,8 -0,1	39,6	green
160/4	VG95234P4-001	–	4	030-8613-000	–	7,1 +0,15	9,55 -0,1	39,6	–
	VG95234P160-002	16,0	–	030-8591-000	–	6,2 +0,15	9,55 -0,1	39,6	–
		10,0	–	030-8591-020	–	4,8 +0,1	9,55 -0,1	39,6	–
	VG95234P160-001	–	6	030-8613-010	–	5,7 +0,1	9,55 -0,1	39,6	brown
500/0	VG95234P0-001	–	0	030-8614-000	–	11,5 +0,15	14,35 -0,1	41,0	–
	VG95234P500-003	50,0	–	030-8592-000	–	10,7 +0,15	14,35 -0,1	41,0	–
	VG95234P500-001	25,0	4	030-8614-010	–	7,6 +0,15	14,35 -0,1	41,0	white
	VG95234P500-002	35,0	2	030-8614-020	–	9,1 +0,15	14,35 -0,1	41,0	grey
		16,0	–	030-8614-030	–	6,2 +0,15	14,35 -0,1	41,0	–