

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0010845060](#)
Status: **Active**
Overview: [MLX™ Power Connectors](#)
Description: 6.35mm Pitch MLX™ Power Connector Header, Vertical, 6 Circuits, Polyester 94V-0, Tin (Sn) Plating, White

Documents:

[3D Model](#) [Product Specification PSX-42002-0001-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General


Product Family PCB Headers
 Series [42002](#)
 Application Power, Wire-to-Board
 Comments Solder Type
 Overview [MLX™ Power Connectors](#)
 Product Name MLX™
 UPC 800753869042

Physical

Breakaway No
 Circuits (Loaded) 6
 Circuits (maximum) 6
 Color - Resin Natural
 Durability (mating cycles max) 50
 First Mate / Last Break No
 Flammability 94V-0
 Glow-Wire Compliant No
 Guide to Mating Part Yes
 Keying to Mating Part Yes
 Lock to Mating Part Yes
 Material - Metal Phosphor Bronze
 Material - Plating Mating Tin
 Material - Resin Polyester
 Net Weight 3.805/g
 Number of Rows 3
 Orientation Vertical
 PC Tail Length 4.27mm
 PCB Retention Yes
 PCB Thickness - Recommended 1.60mm
 Packaging Type Bag
 Pitch - Mating Interface 6.35mm
 Pitch - Termination Interface 6.35mm
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Shrouded Fully
 Stackable No
 Surface Mount Compatible (SMC) No
 Temperature Range - Operating -55°C to +105°C
 Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 13.5A, 20.0A

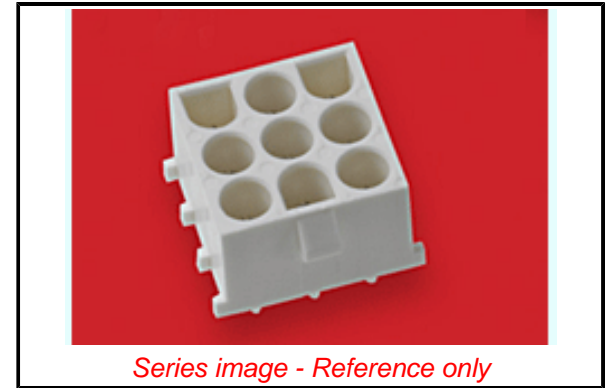

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 ED/30/2017 (7 July
 2017)

Halogen-Free

Status

Not Low-Halogen

**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any
 non-product compliance questions.

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[42002 Series](#)

Mates With

[42021 Plug](#)

Voltage - Maximum 600V

Solder Process Data

Duration at Max. Process Temperature (seconds) 010

Lead-free Process Capability WAVE

Process Temperature max. C 260

Material Info

Engineering Number 42002-06C1A1

Reference - Drawing Numbers

Product Specification PSX-42002-0001-001

Sales Drawing SDA-42002-****

This document was generated on 07/31/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION