


Bolt-type screw terminals WF 8/2BZ

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Product image

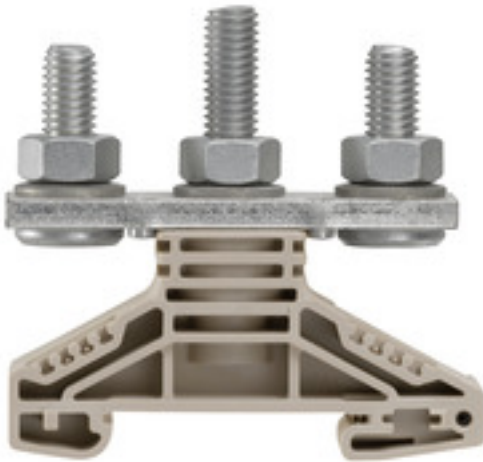

Klippon® Connect with stud Technology

Our stud terminals are an established, robust connection alternative for particularly harsh environments. The extensive accessories and quality workmanship ensure high productivity in planning and installation – and sustainable safety in operation..

General ordering data

Type	WF 8/2BZ
Order No.	1789780000
Version	Bolt-type screw terminals, Feed-through terminal, Rated cross-section: 50 mm ² , Threaded stud connection
GTIN (EAN)	4032248251148
Qty.	25 pc(s).

Creation date September 12, 2020 10:11:28 AM CEST

Catalogue status 28.08.2020 / We reserve the right to make technical changes.

Bolt-type screw terminals WF 8/2BZ

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Dimensions and weights

Width	22.8 mm	Width (inches)	0.898 inch
Height	67 mm	Height (inches)	2.638 inch
Depth	63.5 mm	Depth (inches)	2.5 inch
Net weight	0.123 g		

Temperatures

Storage temperature, max.	55 °C	Storage temperature, min.	-25 °C
Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	120 °C		

Material data

Material	Wemid	Colour	dark beige
UL 94 flammability rating	V-0		

System specifications

Number of levels	1	Number of clamping points per level	3
Levels cross-connected internally	No	PE connection	No
Rail	TS 35		

Additional technical data

Explosion-tested version	No	Open sides	Open
Type of mounting	Snap-on		

CSA rating data

Certificate No. (CSA)	200039-1244019	Current size C (CSA)	150 A
Voltage size C (CSA)	1000 V		

Conductors for clamping (rated connection)

2 x cable lugs DIN 46 234	2.5 to 50 mm ²	2 x cable lugs DIN 46 235	6...35 mm ²
Cable lug to DIN 46234	2.5...50 mm ²	Cable lug to DIN 46235	6...35 mm ²
Clamping range, max.	50 mm ²	Clamping range, min.	2.5 mm ²
Number of connections	3	Stud size for spade connection	M 8
Tightening torque, max.	12 Nm	Tightening torque, min.	6 Nm
Type of connection	Threaded stud connection		

Rating data

Rated cross-section	50 mm ²	Rated voltage	1,000 V
Rated current	150 A	Current at maximum wires	150 A
Volume resistance according to IEC 60947-7-x	0.21 mΩ	Power loss in accordance with IEC 60947-7-x	4.8 W
Rated impulse withstand voltage	8 kV	Pollution severity	3

Bolt-type screw terminals
WF 8/2BZ

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Stud connection**

2 x cable lugs DIN 46 234	2.5 to 50 mm ²	2 x cable lugs DIN 46 235	6...35 mm ²
Cable lug to DIN 46234	2.5...50 mm ²	Cable lug to DIN 46235	6...35 mm ²
Stud size for spade connection	M 8	Tightening torque, max.	12 Nm
Tightening torque, min.	6 Nm		

UL rating data

Certificate No. (cURus)	E60693	Conductor size Factory wiring max. (cURus)	0 AWG
Conductor size Factory wiring min. (cURus)	0 AWG	Current size C (cURus)	150 A
Voltage size C (cURus)	1000 V		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
eClass 9.0	27-14-11-20	eClass 9.1	27-14-11-20
eClass 10.0	27-14-11-20	UNSPSC	30-21-18-01

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	CB Test Certificate CB Certificate EAC certificate DE_PT1004_20160418_854_ISSUE01.pdf Declaration of Conformity Terminals
Brochure/Catalogue	CAT 1 TERM 16/17 EN
Engineering Data	EPLAN, WSCAD
Engineering Data	STEP
User Documentation	StorageConditionsTerminalBlocks

Safety noteSafety notice [Safety Information](#)

Data sheet

**Bolt-type screw terminals
WF 8/2BZ**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

