


## OMNIMATE Signal - series BC/SC 3.81 BCZ 3.81/02/180 SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

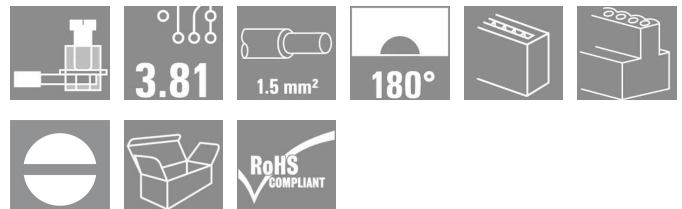

Female socket connectors with clamping-yoke screw system for connecting wires.

Three wire-outlet directions are available and provide flexible connection-level design options:

- 180° wire parallel to plugging direction
- 90° wire perpendicular and above plugging direction
- 270° wire perpendicular and below plugging direction

There are three housing shapes, covering many different requirements, to choose from:

- Standard housing without flange
- Flange with screw (F)
- Flange featuring Weidmüller's patented release latch (LR) for lock-and-release latching with no strain and no tools needed.

Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of customary connectors and offer space for labelling and coding.

- 0.20 - 1.5 mm<sup>2</sup> (IEC) / 28 - 16 AWG (UL)
- 250 V (IEC) / 300 V (UL)
- 17.5 A (IEC) / 10 A (UL)

### General ordering data

Type	BCZ 3.81/02/180 SN BK BX
Order No.	<a href="#">1792770000</a>
Version	PCB plug-in connector, female plug, 3.81 mm, No. of poles: 2, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 1.5 mm <sup>2</sup> , Box
GTIN (EAN)	4032248226757
Qty.	50 pc(s).
Product data	IEC: 320 V / 17.5 A / 0.2 - 1.5 mm <sup>2</sup> UL: 300 V / 10 A / AWG 28 - AWG 16
Packaging	Box

Creation date July 29, 2013 10:37:16 AM CEST

**OMNIMATE Signal - series BC/SC 3.81  
BCZ 3.81/02/180 SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

Net weight	1.7 g
------------	-------

**System parameters**

Product family	OMNIMATE Signal - series BC/SC 3.81	Wire connection method	Clamping yoke connection
Conductor outlet direction	180°	Pitch in mm (P)	3.81 mm
Pitch in inches (P)	0.15 inch	No. of poles	2
Screwdriver blade	0.4 x 2.5	Screwdriver blade standard	DIN 5264
Tightening torque, min.	0.2 Nm	Tightening torque, max.	0.25 Nm
Clamping screw	M 2	Stripping length	7 mm
L1 in mm	3.81 mm	L1 in inches	0.15 inch
Touch-safe protection acc. to DIN VDE 0470	IP 20	Touch-safe protection acc. to DIN VDE 57 106	Safe from finger touch

**Material data**

Insulating material	PA GF	Colour	Black
Colour chart (similar)	RAL 9011	UL 94 flammability rating	V-0
CTI	≥ 550	Contact material	Cu-Leg
Contact surface	tinned		

**Connectable conductors**

Clamping range, rated connection, min.	0.08 mm <sup>2</sup>	Clamping range, rated connection, max.	1.5 mm <sup>2</sup>
Wire connection cross section AWG, min.	AWG 28	Wire connection cross section AWG, max.	AWG 16
Solid, min. H05(07) V-U	0.2 mm <sup>2</sup>	Solid, max. H05(07) V-U	1.5 mm <sup>2</sup>
Flexible, min. H05(07) V-K	0.2 mm <sup>2</sup>	Flexible, max. H05(07) V-K	1.5 mm <sup>2</sup>
w. wire end ferrule, DIN 46228 pt 1, min.	0.2 mm <sup>2</sup>	w. wire end ferrule, DIN 46228 pt 1, max.	1.5 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.2 mm <sup>2</sup>	w. plastic collar ferrule, DIN 46228 pt 4, max.	1.5 mm <sup>2</sup>
Plug gauge acc. to EN 60999 a x b; Ø	2.4 mm x 1.5 mm ; 2.4 mm		

**DIN IEC rating data**

Rated current, min. no. of poles (Tu=20°C)	17.5 A	Rated current, max. no. of poles (Tu=20°C)	17.5 A
Rated current, number of poles (Tu=40°C), min	17 A	Rated current, number of poles (Tu=40°C), max.	15.2 A
Rated voltage for surge voltage class pollution degree II/2	320 V	Rated voltage for surge voltage class pollution degree III/2	160 V
Rated voltage for surge voltage class pollution degree III/3	160 V	Rated impulse voltage for surge voltage class pollution degree II/2	2.5 kV
Rated impulse voltage for surge voltage class pollution degree III/2	2.5 kV	Rated impulse voltage for surge voltage class contamination degree III/3	2.5 kV
Short-time withstand current resistance	3 x 1s with 76 A		

**OMNIMATE Signal - series BC/SC 3.81  
BCZ 3.81/02/180 SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data**

**CSA rating data**

Institute (CSA)



Rated voltage (Use group B)

300 V

Rated current (use group B)	10 A
Rated current (use group D)	10 A
Wire cross-section, AWG, max.	AWG 16

Rated voltage (use group D)	300 V
Wire cross-section, AWG, min.	AWG 28

**UL 1059 rating data**

Rated voltage (use group B)	300 V
Rated voltage (use group D)	300 V
Wire cross-section, AWG, min.	AWG 28

Rated current (use group B)	10 A
Rated current (use group D)	10 A
Wire cross-section, AWG, max.	AWG 16

**Classifications**

ETIM 3.0	EC001284	UNSPSC	30-21-18-10
eClass 4.1	27-26-07-01	eClass 5.1	27-26-07-04
eClass 6.2	27-26-07-04	eClass 7.1	27-44-04-02

**Notes**

Notes

- Additional colours on request
- Gold-plated contact surfaces on request
- Rated current related to rated cross-section & min. No. of poles.
- Wire end ferrule without plastic collar to DIN 46228/1
- Wire end ferrule with plastic collar to DIN 46228/4
- P on drawing = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.

**Approvals**

Approvals




ROHS

Conform


**OMNIMATE Signal - series BC/SC 3.81  
BCZ 3.81/02/180 SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com


**Drawings**

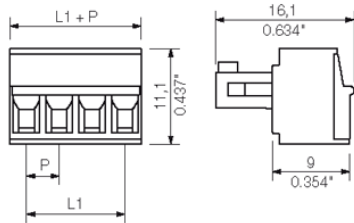


BCZ 3.81/./180 - SC-SMT 3.81/./90

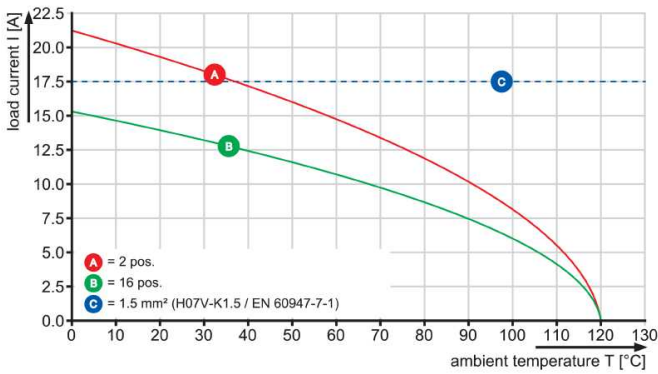

BCZ 3.81/./180 - SCD-THR 3.81/./90

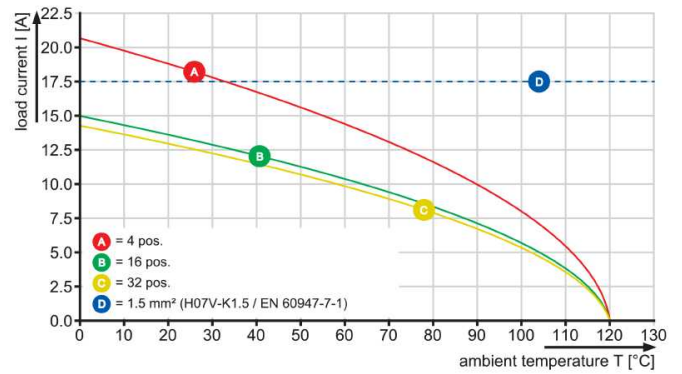

BCZ 3.81/./180 - SCDV-THR 3.81/./180

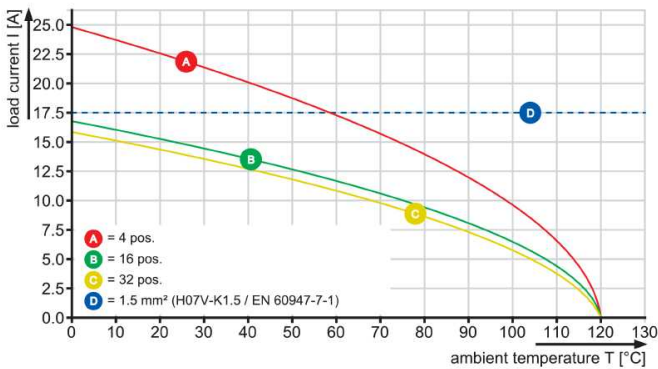

**OMNIMATE Signal - series BC/SC 3.81  
BCZ 3.81/02/180 SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (fully pluggable)**
**SC-SMT 3.81/180G Box**


High-temperature-resistant pin header (SC-SMT 180G) in 3.81-mm pitch (0.15 inch)

- Plugging direction is perpendicular to PCB (standing)
- Closed (G) .
- Packed either in box (BX) or on anti-static roll (tape-on-reel, RL)
- Pin length of either 1.5 mm or 3.2 mm

Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling and coding.

- 320 V (IEC) / 300 V (UL)
- 14.9 A (IEC) / 10 A (UL)

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SC-SMT 3.81/02/180G 3.2SN BK BX	<a href="#">1862920000</a>	PCB plug-in connector, male header, closed side, Reflow solder connection, 3.81 mm, No. of poles: 2, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248428113	50 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A	Box
SC-SMT 3.81/02/180G 1.5SN BK BX	<a href="#">1863720000</a>	PCB plug-in connector, male header, closed side, Reflow solder connection, 3.81 mm, No. of poles: 2, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248428793	50 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A	Box

**SC 3.81/90G**


The SC pin header has a parallel (recumbent) plugging direction in relation to the PCB. It is available in closed (G) and screw flange (F) versions.

Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors. They support a flood-light display and offer space for labelling and coding.

- 320 V (IEC) / 300 V (UL)
- 17.5 A (IEC) / 10 A (UL)

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SC 3.81/02/90G 3.2SN GN BX	<a href="#">1793240000</a>	PCB plug-in connector, male header, closed side, Solder connection, 3.81 mm, No. of poles: 2, 90°, Solder pin length (l): 3.2 mm, tinned, Pale green, Box	4032248227716	50 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A	Box
SC 3.81/02/90G 3.2SN OR BX	<a href="#">1942020000</a>	PCB plug-in connector, male header, closed side, Solder connection, 3.81 mm, No.	4032248655526	50 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A	Box

Creation date July 29, 2013 10:37:16 AM CEST

**OMNIMATE Signal - series BC/SC 3.81  
BCZ 3.81/02/180 SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Mating connector (fully pluggable)**

of poles: 2, 90°, Solder pin  
length (l): 3.2 mm, tinned,  
Orange, Box

SC	<a href="#">1793130000</a>	PCB plug-in connector, male	4032248227624 50 pc(s).	IEC: 320 V / 17.5 A	Box
3.81/02/90G		header, closed side, Solder		UL: 300 V / 10 A	
3.2SN BK BX		connection, 3.81 mm, No.			
		of poles: 2, 90°, Solder pin			
		length (l): 3.2 mm, tinned,			
		Black, Box			

**SC 3.81/180G**


The SC pin header has a perpendicular (standing) plugging direction in relation to the PCB. It is available in closed (G) and screw flange (F) versions. Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling and coding.

- 320 V (IEC) / 300 V (UL)
- 17.5 A (IEC) / 10 A (UL)

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SC	<a href="#">1793520000</a>	PCB plug-in connector, male	4032248230433 50 pc(s).		IEC: 320 V / 17.5 A	Box
3.81/02/180G		header, closed side, Solder			UL: 300 V / 10 A	
3.2SN BK BX		connection, 3.81 mm, No.				
		of poles: 2, 180°, Solder pin				
		length (l): 3.2 mm, tinned,				
		Black, Box				
SC	<a href="#">1793610000</a>	PCB plug-in connector, male	4032248230730 50 pc(s).		IEC: 320 V / 17.5 A	Box
3.81/02/180G		header, closed side, Solder			UL: 300 V / 10 A	
3.2SN GN BX		connection, 3.81 mm, No.				
		of poles: 2, 180°, Solder pin				
		length (l): 3.2 mm, tinned,				
		Pale green, Box				
SC	<a href="#">1942840000</a>	PCB plug-in connector, male	4032248654758 50 pc(s).		IEC: 320 V / 17.5 A	Box
3.81/02/180G		header, closed side, Solder			UL: 300 V / 10 A	
3.2SN OR BX		connection, 3.81 mm, No.				
		of poles: 2, 180°, Solder pin				
		length (l): 3.2 mm, tinned,				
		Orange, Box				

**OMNIMATE Signal - series BC/SC 3.81  
BCZ 3.81/02/180 SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (fully pluggable)**
**SC-SMT 3.81/90G Box**


High-temperature-resistant pin header (SC-SMT 90G) in 3.81-mm pitch (0.15 inch)

- Plugging direction parallel to PCB (recumbent)
- Closed (G)
- Packed either in box (BX) or on anti-static roll (tape-on-reel, RL)
- Pin length of either 1.5 mm or 3.2 mm

Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling and coding.

- 320 V (IEC) / 300 V (UL)
- 14.9 A (IEC) / 10 A (UL)

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SC-SMT 3.81/02/90G 3.2SN BK BX	<a href="#">1862460000</a>	PCB plug-in connector, male header, closed side, Reflow solder connection, 3.81 mm, No. of poles: 2, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248427611	50 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A	Box
SC-SMT 3.81/02/90G 1.5SN BK BX	<a href="#">1862960000</a>	PCB plug-in connector, male header, closed side, Reflow solder connection, 3.81 mm, No. of poles: 2, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248428069	50 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A	Box

**SC-SMT 3.81/180G Tape**


High-temperature-resistant pin header (SC-SMT 180G) in 3.81-mm pitch (0.15 inch)

- Plugging direction is perpendicular to PCB (standing)
- Closed (G)
- Packed either in box (BX) or on anti-static roll (tape-on-reel, RL)
- Pin length of either 1.5 mm or 3.2 mm

Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling and coding.

- 320 V (IEC) / 300 V (UL)
- 14.9 A (IEC) / 10 A (UL)

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SC-SMT 3.81/02/180G 3.2SN BK RL	<a href="#">1863450000</a>	PCB plug-in connector, male header, closed side, Reflow solder connection, 3.81 mm, No. of poles: 2, 180°	4032248428557	300 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A	Tape

**OMNIMATE Signal - series BC/SC 3.81  
BCZ 3.81/02/180 SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (fully pluggable)**

		Solder pin length (l): 3.2 mm, tinned, Black, Tape		
SC-SMT	<a href="#">1864050000</a>	PCB plug-in connector, male	4032248429172 300 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A
3.81/02/180G		header, closed side, Reflow		Tape
1.5SN BK RL		solder connection, 3.81 mm, No. of poles: 2, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Tape		



**OMNIMATE Signal - series BC/SC 3.81  
BCZ 3.81/02/180 SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (conditionally pluggable)**
**SC-SMT 3.81/90G Tape**


High-temperature-resistant pin header (SC-SMT 90G) in 3.81-mm pitch (0.15 inch)

- Plugging direction parallel to PCB (recumbent)
- Closed (G)
- Packed either in box (BX) or on anti-static roll (tape-on-reel, RL)
- Pin length of either 1.5 mm or 3.2 mm

Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling and coding.

- 320 V (IEC) / 300 V (UL)
- 14.9 A (IEC) / 10 A (UL)

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SC-SMT 3.81/02/90G 1.5SN BK RL	<a href="#">1863140000</a>	PCB plug-in connector, male header, closed side, Reflow solder connection, 3.81 mm, No. of poles: 2, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Tape	4032248428335	400 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A	Tape
SC-SMT 3.81/02/90G 3.2SN BK RL	<a href="#">1862810000</a>	PCB plug-in connector, male header, closed side, Reflow solder connection, 3.81 mm, No. of poles: 2, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Tape	4032248427772	400 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A	Tape

**SC-SMT 3.81/180LF Tape**


High-temperature-resistant pin header (SC-SMT 180LF) in 3.81-mm pitch (0.15 inch)

- Plugging direction is perpendicular to PCB (standing)
- With solder flange (LF).
- Packed either in box (BX) or on anti-static roll (tape-on-reel, RL)
- Pin length of either 1.5 mm or 3.2 mm

Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling.

- 320 V (IEC) / 300 V (UL)
- 14.9 A (IEC) / 10 A (UL)

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SC-SMT 3.81/02/180LF 3.2SN BK RL	<a href="#">1863500000</a>	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 3.81 mm, No. of poles: 2,	4032248428687	300 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A	Tape

**OMNIMATE Signal - series BC/SC 3.81  
BCZ 3.81/02/180 SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (conditionally pluggable)**

SC-SMT	<a href="#">1864220000</a>	180°, Solder pin length (l): 3.2 mm, tinned, Black, Tape	4032248429523 300 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A	Tape
3.81/02/180LF		PCB plug-in connector, male header, Solder flange, Reflow solder connection, 3.81 mm, No. of poles: 2, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Tape			
1.5SN BK RL					

**SC-SMT 3.81/90LF Box**


High-temperature-resistant pin header (SC-SMT 90LF) in 3.81-mm pitch (0.15 inch)

- Plugging direction parallel to PCB (recumbent)
- With solder flange (LF).
- Packed either in box (BX) or on anti-static roll (tape-on-reel, RL)
- Pin length of either 1.5 mm or 3.2 mm

Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling.

- 320 V (IEC) / 300 V (UL)
- 14.9 A (IEC) / 10 A (UL)

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SC-SMT	<a href="#">1863670000</a>	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 3.81 mm, No. of poles: 2, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248428854 50 pc(s).		IEC: 320 V / 17.5 A UL: 300 V / 10 A	Box
3.81/02/90LF						
3.2SN BK BX						
SC-SMT	<a href="#">1862560000</a>	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 3.81 mm, No. of poles: 2, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248427536 50 pc(s).		IEC: 320 V / 17.5 A UL: 300 V / 10 A	Box
3.81/02/90LF						
1.5SN BK BX						

**OMNIMATE Signal - series BC/SC 3.81  
BCZ 3.81/02/180 SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (conditionally pluggable)**
**SC-SMT 3.81/90LF Tape**


High-temperature-resistant pin header (SC-SMT 90LF) in 3.81-mm pitch (0.15 inch)

- Plugging direction parallel to PCB (recumbent)
- With solder flange (LF).
- Packed either in box (BX) or on anti-static roll (tape-on-reel, RL)
- Pin length of either 1.5 mm or 3.2 mm

Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling.

- 320 V (IEC) / 300 V (UL)
- 14.9 A (IEC) / 10 A (UL)

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SC-SMT	<a href="#">1863890000</a>	PCB plug-in connector,	4032248429103	400 pc(s).	IEC: 320 V / 17.5 A	Tape
3.81/02/90LF		male header, Solder flange,			UL: 300 V / 10 A	
3.2SN BK RL		Reflow solder connection,				
		3.81 mm, No. of poles: 2,				
		90°, Solder pin length (l):				
		3.2 mm, tinned, Black, Tape				

**SC-SMT 3.81/180LF Box**


High-temperature-resistant pin header (SC-SMT 180LF) in 3.81-mm pitch (0.15 inch)

- Plugging direction is perpendicular to PCB (standing)
- With solder flange (LF).
- Packed either in box (BX) or on anti-static roll (tape-on-reel, RL)
- Pin length of either 1.5 mm or 3.2 mm

Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling.

- 320 V (IEC) / 300 V (UL)
- 14.9 A (IEC) / 10 A (UL)

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SC-SMT	<a href="#">1864070000</a>	PCB plug-in connector,	4032248429271	50 pc(s).	IEC: 320 V / 17.5 A	Box
3.81/02/180LF		male header, Solder flange,			UL: 300 V / 10 A	
1.5SN BK BX		Reflow solder connection,				
		3.81 mm, No. of poles: 2,				
		180°, Solder pin length (l):				
		1.5 mm, tinned, Black, Box				
SC-SMT	<a href="#">1863230000</a>	PCB plug-in connector,	4032248428434	50 pc(s).	IEC: 320 V / 17.5 A	Box
3.81/02/180LF		male header, Solder flange,			UL: 300 V / 10 A	
3.2SN BK BX		Reflow solder connection,				
		3.81 mm, No. of poles: 2,				

## OMNIMATE Signal - series BC/SC 3.81 BCZ 3.81/02/180 SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

### Mating connector (conditionally pluggable)

180°, Solder pin length (l):  
3.2 mm, tinned, Black, Box

#### SC 3.81/180F



The SC pin header has a perpendicular (standing) plugging direction in relation to the PCB. It is available in closed (G) and screw flange (F) versions. Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling and coding.

- 320 V (IEC) / 300 V (UL)
- 17.5 A (IEC) / 10 A (UL)

#### General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SC 3.81/02/180F 3.2SN GN BX	<a href="#">1793790000</a>	PCB plug-in connector, male header, Flange, Solder connection, 3.81 mm, No. of poles: 2, 180°, Solder pin length (l): 3.2 mm, tinned, Pale green, Box	4032248230914	50 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A	Box
SC 3.81/02/180F 3.2SN BK BX	<a href="#">1793700000</a>	PCB plug-in connector, male header, Flange, Solder connection, 3.81 mm, No. of poles: 2, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248230822	50 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A	Box
SC 3.81/02/180F 3.2SN OR BX	<a href="#">1943180000</a>	PCB plug-in connector, male header, Flange, Solder connection, 3.81 mm, No. of poles: 2, 180°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4032248654413	50 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A	Box

#### SC 3.81/90F



The SC pin header has a parallel (recumbent) plugging direction in relation to the PCB. It is available in closed (G) and screw flange (F) versions. Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors. They support a flood-light display and offer space for labelling and coding.

- 320 V (IEC) / 300 V (UL)
- 17.5 A (IEC) / 10 A (UL)

#### General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.	Product data	Packaging
SC 3.81/02/90F 3.2SN OR BX	<a href="#">1942450000</a>	PCB plug-in connector, male header, Flange, Solder connection, 3.81 mm, No.	4032248655144	50 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A	Box

Creation date July 29, 2013 10:37:16 AM CEST

**OMNIMATE Signal - series BC/SC 3.81  
BCZ 3.81/02/180 SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (conditionally pluggable)**

		of poles: 2, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box		
SC	<a href="#">1793420000</a>	PCB plug-in connector,	4032248228492 50 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A
3.81/02/90F		male header, Flange, Solder connection, 3.81 mm, No.		Box
3.2SN GN BX		of poles: 2, 90°, Solder pin length (l): 3.2 mm, tinned, Pale green, Box		
SC	<a href="#">1793330000</a>	PCB plug-in connector,	4032248227808 50 pc(s).	IEC: 320 V / 17.5 A UL: 300 V / 10 A
3.81/02/90F		male header, Flange, Solder connection, 3.81 mm, No.		Box
3.2SN BK BX		of poles: 2, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box		

