


3SBC2000A2 Product Details

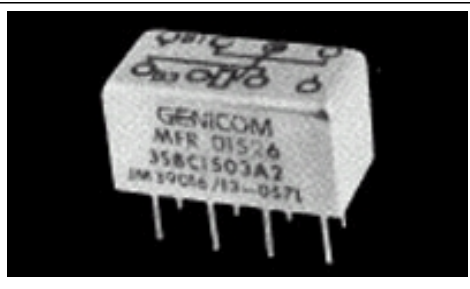

Military/Aerospace High Performance Relays

[Not EU RoHS or ELV Compliant](#)


Product Highlights:

- ? 3SBC 1/5 -Size Relay Series
- ? Input Voltage = 6 VDC
- ? Contact Arrangement = 2 Form C, DPDT, 2 C/O
- ? Contact Current Rating = 2 Amps.
- ? Non Polarized, Monostable Coil Magnetic System

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

3SBC2000A2
(M39016/13 -055P)
 [Active](#)

Documentation & Additional Information

Product Drawings:

- ? None Available

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? None Available

Application Specifications:

- ? None Available

Instruction Sheets:

- ? None Available

CAD Files:

- ? None Available

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? Termination Type = PC Pins

Electrical Characteristics:

- ? Input Voltage (VDC) = 6
- ? Contact Current Rating (Amps.) = 2
- ? Coil Polarity Protection Diode = Without
- ? Transistor Driver = Without
- ? Coil Resistance (?) = 56
- ? MOSFET Driver = Without
- ? Coil Power Measurement = Milliwatts
- ? Coil Power, Nominal (mW) = 643
- ? Actuating System = DC
- ? Shock = 75 G's, 6ms
- ? Vibration = 30G's, 10 to 3000Hz

Body Related Features:

- ? [Series](#) = 3SBC 1/5 -Size Relay

Contact Related Features:

- ? Mounting Options = PC Board
- ? Enclosure = Hermetically Sealed
- ? Approved Standards = M39016 Qualified, P Level

Configuration Related Features:

- ? [Contact Arrangement](#) = 2 Form C, DPDT, 2 C/O
- ? Coil Magnetic System = Non Polarized, Monostable
- ? Coil Suppression Diode = Without

Industry Standards:

- ? Government/Industry Qualification = Yes
- ? Government/Industry Part Number = M39016/13 -055P
- ? [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- ? [Lead Free Solder Processes](#) = Not suitable for lead free processing

Conditions for Usage:

- ? Temperature Range (°C) = -65 – +125

Other:

- ? Brand = CII