

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0440680241](#)

Status: **Active**

Overview: [Mini-Fit BMI Connectors](#)

Description: Mini-Fit® BMI, 260C Wave Solderable, 4.20mm Pitch, Dual Row, Vertical, 10 Circuits, 6.35mm PCB Thickness, with Snap-In Metal Pins, PA Polyamide Nylon 4/6, UL 94V-0, with Gold (Au) Over Nickel (Ni) Plating, with Solderable Regent

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-43810-001 \(PDF\)](#)

[Product Specification PS-45750-001-001 \(PDF\)](#)

[Product Specification TS-43879-001-001 \(PDF\)](#)

[Packaging Specification PK-43879-001-000 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	44068
Application	Board-to-Board, Power, Wire-to-Board
Comments	Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 Mini-Fit® Plus HCS Crimp Terminal Crimped to 16 AWG wire., See Molex product specification PS-45750-001 for additional current de-rating information.
Overview	Mini-Fit BMI Connectors
Product Name	Mini-Fit® BMI
UPC	800754784115

Physical

Breakaway	No
Circuits (Loaded)	10
Circuits (maximum)	10
Color - Resin	Black
Durability (mating cycles max)	10
First Mate / Last Break	Yes
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	High Temperature Thermoplastic
Net Weight	5.203/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	5.21mm
PCB Locator	No
PCB Retention	Yes
Packaging Type	Tray
Pitch - Mating Interface	4.20mm
Pitch - Termination Interface	4.20mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm

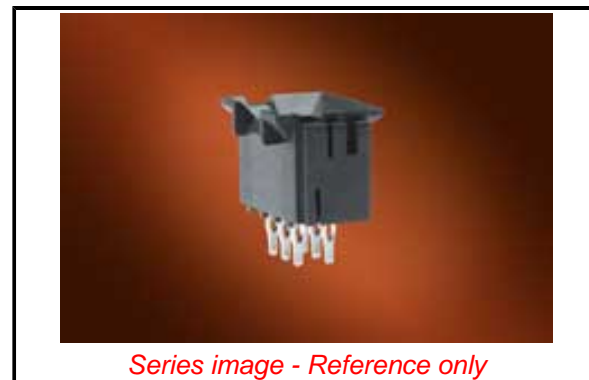

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/30/2017 (7 July 2017)

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

[44068](#) Series

Mates With

[42385](#) , [42474](#) , [44475](#) , [44516](#) , [5557](#) Dual Row

Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	13.0A
Voltage - Maximum	600V AC (RMS)/DC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-43879-001-000
Product Specification	PS-43810-001, PS-45750-001-001, TS-43879-001-001
Sales Drawing	SD-44068-051-000

This document was generated on 08/28/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION