
Switchcraft®

Previous Page | Return to Index | Next Page

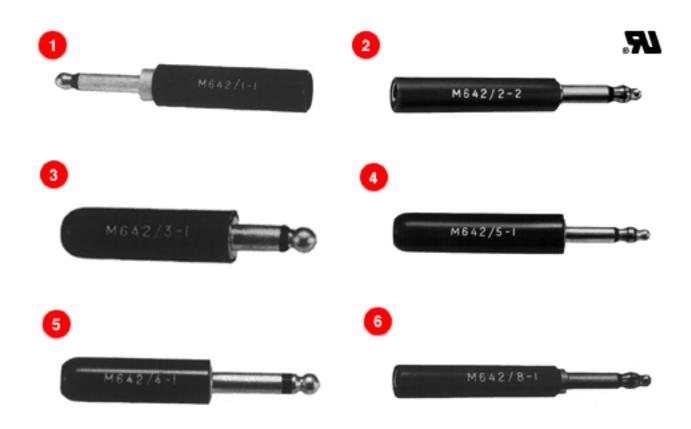

MIL-TYPE 1/4" PHONE PLUGS

- **1. 2-CONDUCTOR SERIES 420, 425**
- **2. 3-CONDUCTOR SERIES 482, 483**
- 3. 2-CONDUCTOR SERIES 430
- **4.** 3-CONDUCTOR SERIES 480 (.206")
- **5.** 2-CONDUCTOR SERIES 440, 445
- **6. 3-CONDUCTOR SERIES 484 (.206")**

click here to download a schematic drawing

(you will need to have Adobe Acrobat installed on your system to do this)



FEATURES

Designed for high quality communication equipment to meet military requirements, This series features one-piece tip rod and one-piece sleeve and plug body, assembled together into a mold as inserts, providing a finished plug with complete continuity of thermoplastic insulation between tip rod and plug sleeve. Internal (invisible externally) interlock mechanically engages the metal and plastic components providing a realistic lock to prevent parts shifting. Design and material in accordance with MIL-P-642(A), MIL part number molded or stamped on handle, manufacturer's trademark (as required by MIL specification) appears on plug body.

SPECIFICATIONS

Tip Rod, Body and Screws: Copper alloy, natural finish.

Terminals: Tinned copper alloy.

Insulation: Thermoplastic, per MIL-P-22985, Type II, Class 1.

Handles: Thermoplastic, Type 6, per MIL-M-20693, Type II. Shielded; machined from copper alloy, nickel-plated.

STRAIN RELIEF CLAMP

For MIL-type Littel-Plug phone plugs. **P2380** conforms to Specification SC-A-7674-F - supplied with Plug Numbers 430, 440, 445 and 470. **P2381** meets Specification MS-35762 - supplied with Plug Number 480 and Extension-Jax® phone jack, Number 820.

Previous Page | Return to Index | Next Page

To search a category please click on the corresponding icon:



| Connectors | Jacks and Plugs | | Patch Panels, Patch Kits & Jackfields | Cable Assemblies and Patch Cords | Switches |

All products shown are covered by Switchcraft's limited lifetime warranty.

| <u>Switchcraft home</u> | <u>About Us</u> | <u>Products</u> | <u>What's New</u> | <u>Search</u> | <u>Contact Us</u>